

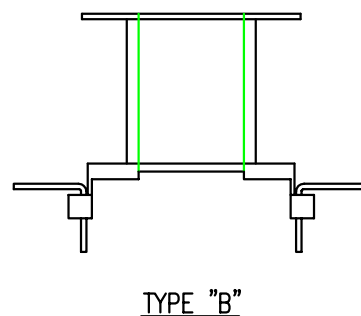
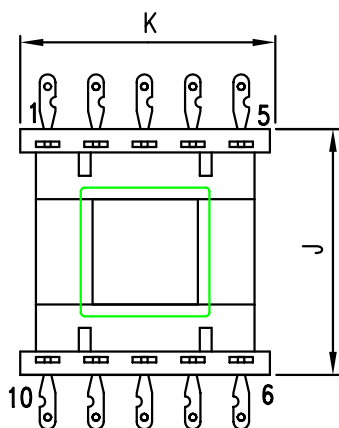


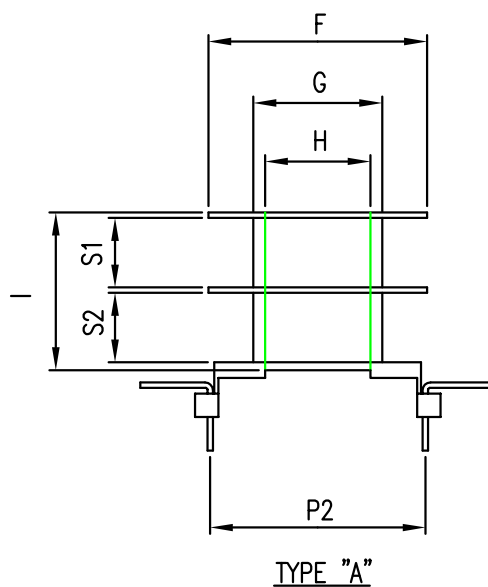

台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

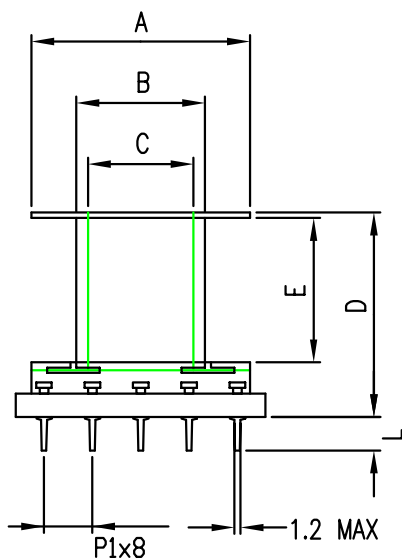

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.2	J ±0.2	K ±0.2	L ±0.3	P1 ±0.2	P2 ±0.3	S1 ±0.2	S2 ±0.2	TYP3
□ 41-13.6-3-10PIN (0704105)	28.2	15.6	13.5	26.8	18.7	28.5	15.7	13.6	20.6	31.3	31.8	5.4	6.4	27.7	9.0	9.0	A
□ 41-13.6-2-10PIN (0704106)	28.2	15.6	13.5	26.8	18.7	28.5	15.7	13.6	20.6	31.3	31.8	5.4	6.4	27.7	/	/	B
□ 41-21-3-10PIN (0704107)	28.6	15.7	13.6	26.9	18.8	36.3	23.6	21.7	20.6	40.2	31.3	5.4	6.4	36.3	9.2	8.7	A

DATE	REVISED STORY	MODEL : EI-41-13.6-3-10PIN (TPI NO.:0704105) EI-41-21-3-10PIN (TPI NO.:0704107) EI-41-13.6-2-10PIN (TPI NO.:0704106)		
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : Nylon 66/GF UL94HB; PBT/GF UL94V-0		
		PIN MATERIAL : PHOSPHORUS BRONZE (TIN PLATED)		
		DATE : June 01,2002	REV.: A	TOLERANCE : .XXX±0.08 .XX ±0.1 .X ±0.2