


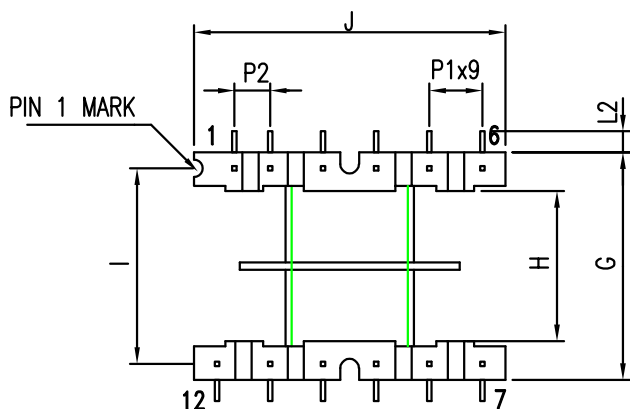


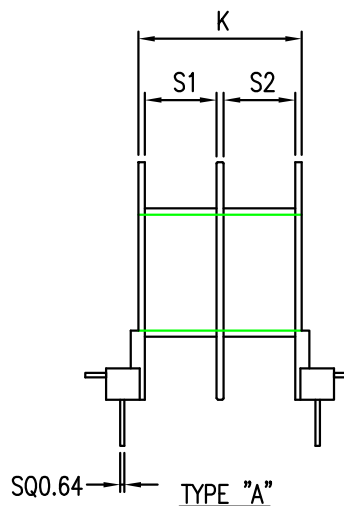

台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

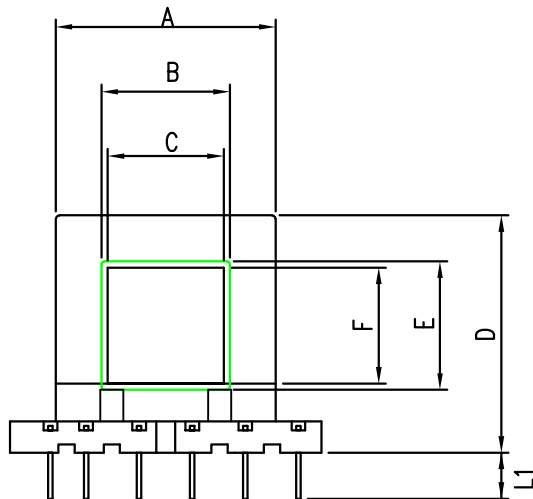

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.3	J ±0.2	K ±0.2	L1 ±0.3	L2 ±0.3	P1 ±0.2	P2 ±0.2	S1 ±0.2	S2 ±0.2	TYPE
EI 57-16-2-12PIN (0605701)	37.5	21.6	19.6	36.0	18.3	16.3	37.6	26.2	33.2	44.2	28.3	3.5	3.3	7.6	5.1	/	/	B
EI 57-16-3-12PIN (0605702)	37.4	21.6	19.7	36.0	18.4	16.4	37.6	26.2	33.1	44.2	28.3	3.5	3.3	7.6	5.1	12.6	12.6	A

DATE	REVISED STORY	MODEL : EI-57-16-2-12PIN (TPI NO.:0605701) EI-57-16-3-12PIN (TPI NO.:0605702)	
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : Nylon 66/GF UL94HB PBT/GF; PET/GF UL94V-0 PIN MATERIAL : CP WIRE (TIN PLATED)	
		DATE : June 01,2002	REV.: A
		TOLERANCE : .XXX±0.08 .XX ±0.1 .X ±0.2	