




台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

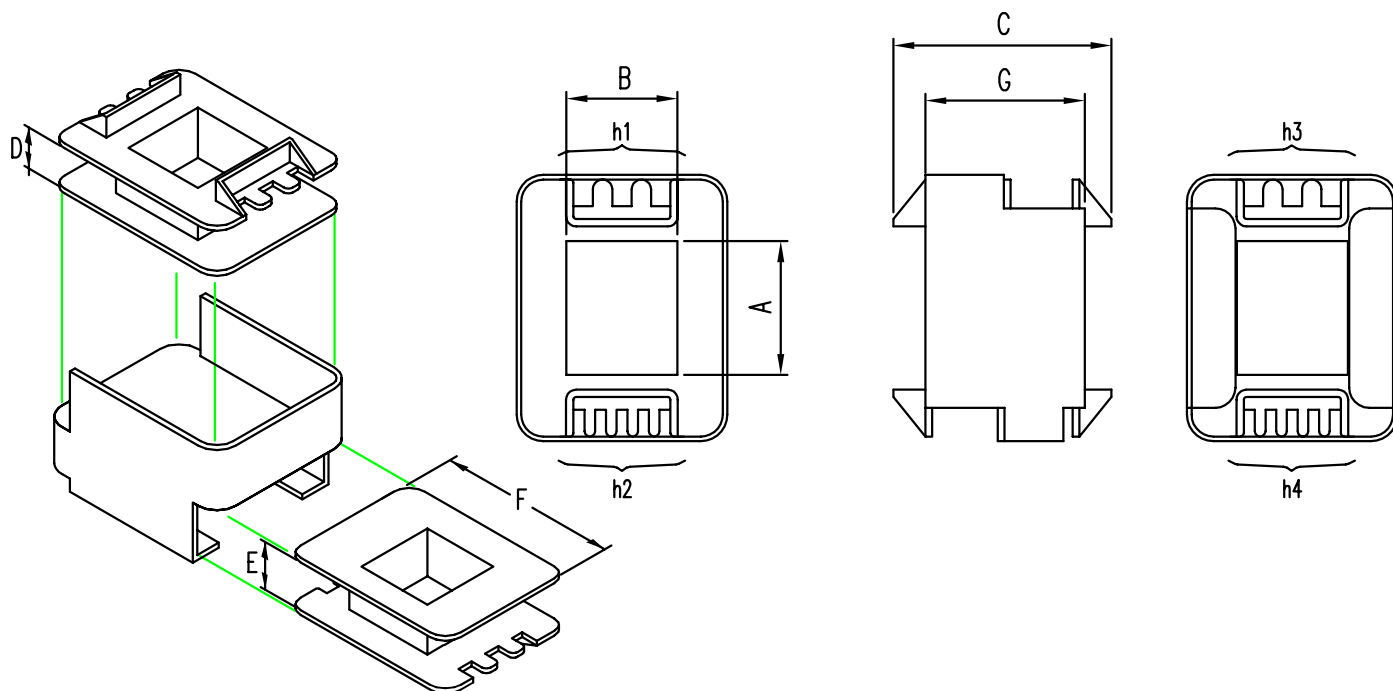

UNIT : mm

MODEL (TPI No.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	h1	h2	h3	h4
EI 35-13.5 (0303501)	13.8	10.1	28.4	7.4	7.4	30.2	19.2	3	7	3	7
EI 41-16.5 (0304101)	16.5	14.0	30.0	7.9	7.9	32.8	21.5	3	7	3	7
EI 41-20 (0304102)	20.8	13.9	30.3	7.9	7.9	37.0	21.3	3	3	3	3
EI 48-25 (0304803)	25.3	16.6	30.5	9.2	9.2	44.0	23.8	3	5	3	5
EI 54-22.5 (0305401)	22.6	18.7	39.3	10.0	10.0	41.8	26.6	3	5	3	5
EI 57-20 (0305701)	20.8	19.8	40.1	10.9	10.9	40.0	28.1	3	7	3	7
EI 57-25 (0305703)	25.3	20.3	38.4	11.4	11.4	47.3	28.4	4	5	4	5
EI 76-12 (0307601)	12.7	26.0	46.3	16.0	16.0	36.0	37.7		6		6
EI 76-40 (0307602)	42.0	27.0	50.4	14.9	15.0	65.4	37.7	5	5	5	5

DATE	REVISED STORY	MODEL : EI 35 ~ EI 76 VDE TYPE		
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : Nylon 66 UL94V-2;PBT/GF UL94V-0		
		SHROUD MATERIAL : Nylon 66 UL94V-2		
		DATE : June 01,2002	REV. : A	TOLERANCE : .XXX±0.08 .XX ±0.1 .X ±0.2