

Product Name: RS485 Interface Proximity Reader

Product Type: PR-75R


Features:

About : [Proximity Reader](#)

- l Frequency is 125KHz or 13.56MHz
- l Reading range: 125KHz is 3~10cm/13.56MHz is 2~5cm
- l Compatible controller : JST-320, JST-420 or JST-425
- l With triple color LED which will indicates on-line or off-line status
- l Reader ID can be set through Dip Switch
- l Built-in tamper switch detects when case is forced open or destroyed, the alarm will output
- l When controller is shut down or off -line, the legal card is allowed to access the door
- l With a push button input and two relay output for trigger the door lock and alarm
- l With an alarm loop input

Configuration :

JST-420R or JST-320

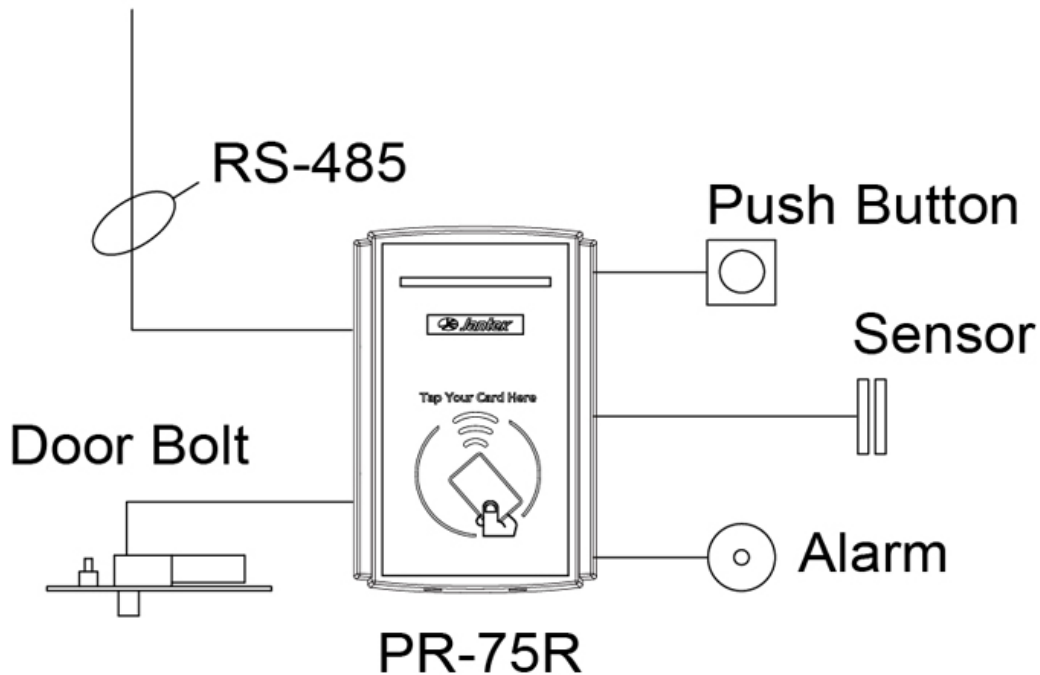

Specifications:

- 1 LED : Triple color LED indicator (Red, Green and Blue color)
- 1 Keypad : 4 x 4 16 Keys Touch Keypad (option device)
- 1 Output Point : 2 * Relay NO/NC Output Point Max DC12V 1A (RS485 interface reader)
- 1 Input Point : 1 * Push button, 1 * Alarm Loop
- 1 Power Requirement : DC 12V 1A
- 1 Working Environment : Temperature: 0°C~50°C Humidity: 20~90% RH
- 1 Dimension : 130(L) × 86(W) × 28(H)mm

Ordering Information:

Order form : Model No/Card Type/Interface/Keypad

Example : If you want to order PR-75 with EM card type and the interface is RS485 with Touch Keypad. Please mark: PR-75ERK (PR-75 is Model No., E is EM Card, R is RS485 and K is with Touch Keypad)

※ Option :

Reader Pad : BH-75

Reference models:

Taiwan Jantek Electronics., Ltd.

www.jantek.com.tw

Add:6F-1, No. 1, Wuquan 1St.Rd.,Xinzhuang District, TEL : 886-2-22991255

New Taipei City 24892, Taiwan, R.O.C.

FAX : 02-2299-1257 / 02-2299-7412

Email : service@jantek.com.tw