




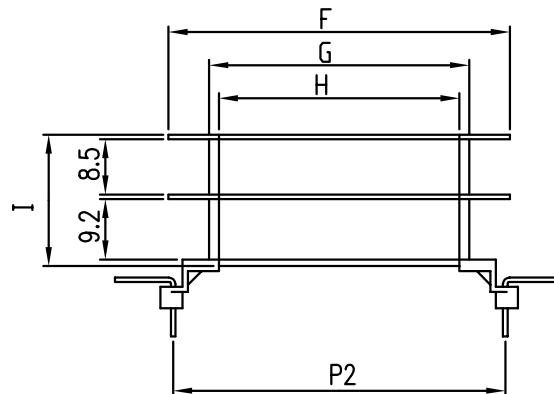


台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

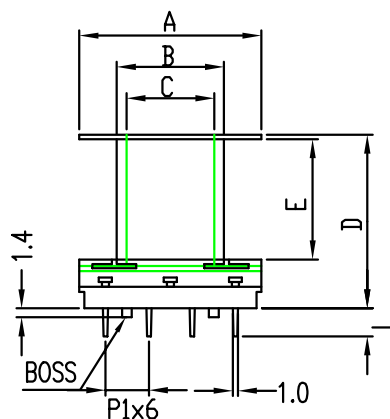

TYPE "A"

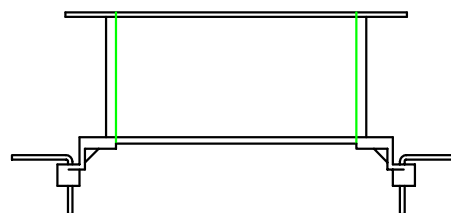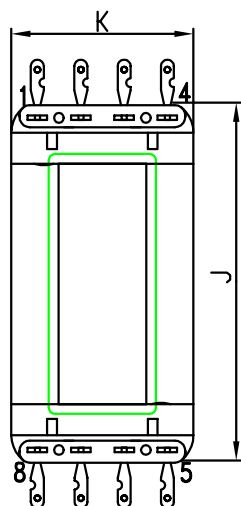

TYPE "B"

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.2	J ±0.2	K ±0.2	L ±0.3	P1 ±0.2	P2 ±0.3	BOOS	TYPE
EI 41-39-3-8PIN (0704110)	28.2	15.2	13.4	26.8	18.6	54.1	40.9	39.3	20.5	57.3	28.1	5.3	6.3	53.8	V	A
EI 41-39-2-8PIN (0704111)	28.2	15.2	13.4	26.8	18.6	54.1	40.9	39.3	20.5	57.3	28.1	5.3	6.3	53.8	V	B
EI 41-39-3-8PIN (0704121)	28.2	15.2	13.4	26.8	18.6	54.1	40.9	39.3	20.5	57.3	28.1	5.3	6.5	53.8		A

DATE	REVISED STORY	MODEL : EI-41-39-3-8PIN (TPI NO.:0704110) EI-41-39-3-8PIN (TPI NO.:0704121) EI-41-39-2-8PIN (TPI NO.:0704111)				
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : Nylon 66/GF UL94HB ; PBT/GF UL94V-0				
		PIN MATERIAL : PHOSPHORUS BRONZE (TIN PLATED)				
		DATE : June 01,2002	REV.: A	TOLERANCE :		