



Product Name: PC On Line Proximity
Access Control System

Product Type: PR-85C

Features:

About PC On Line Proximity Access Control System:

Standalone or PC on line with JAS software.

Frequency is 125KHZ.

With backlit LCD display.

Programmable door delay close time from 0~255 seconds, when door unlock over delay time setting, the alarm signal will output.

Support 5,000 users.

Can be used by 1.8mm、0.76mm EM card or key tag.

Reading range from 10~16cm (under normal environment).

Built-in clock and calendar.

Built-in RS232 & RS485 interface.

Can save 8,000 door access history record.

Built-in tamper switch detects when case is forced open or destroy, the alarm signal output (A. B. point).

Data is protected even after power failure.

There are three different schedules in each day for user to set special time schedule.


Inside door can be installed a push button or PR-200/PR-300.

With real-time printing function (RS232 port), can be connected a serial printer.

Operation mode: Card Only, Card + PIN, PIN or Card, Facility


Code Only, Opening or Inhibit Access.

Configuration :

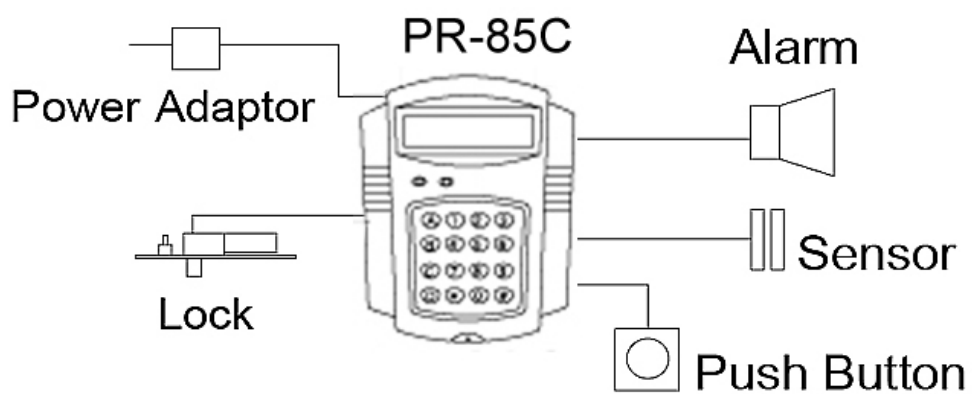

Configuration (RS-232 / RS-485.422) :

※ PR-85C PC on Line Proximity Card Reader Configuration

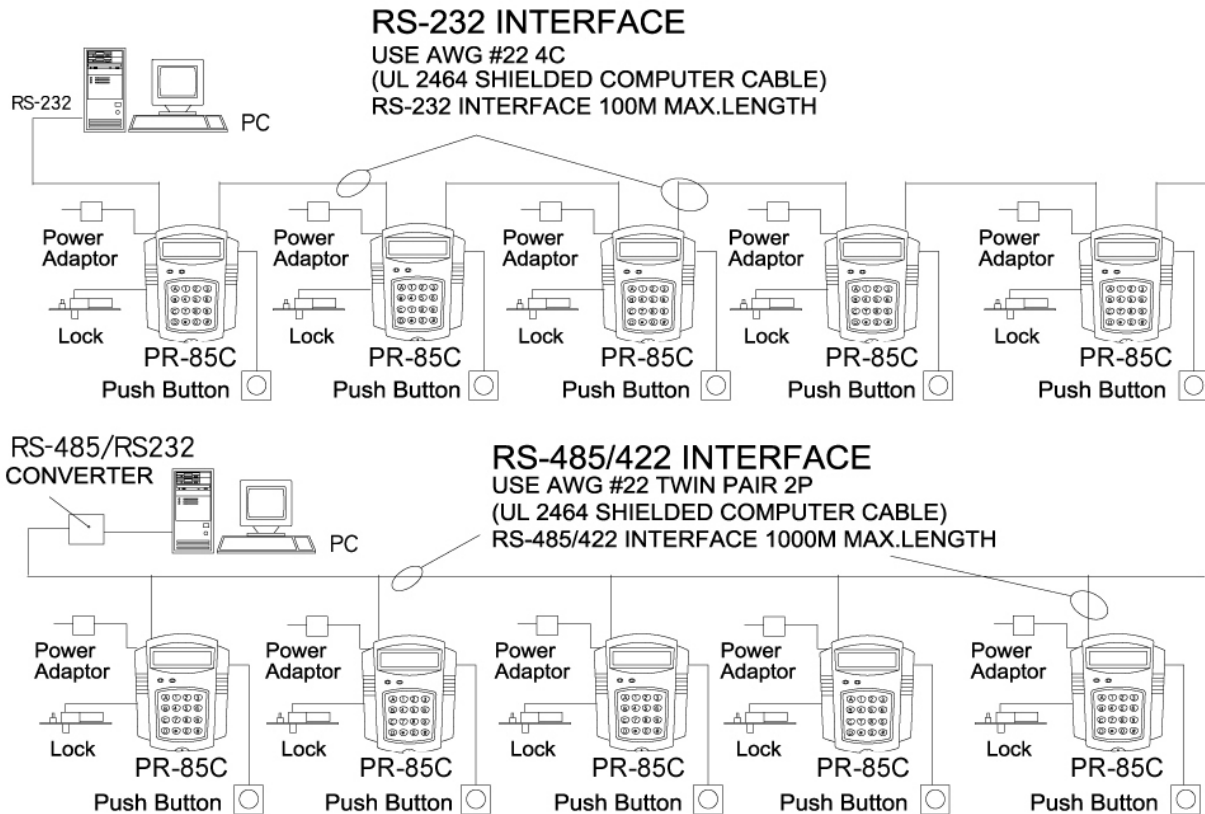

Specifications:

LCD	2X16 Characters (backlit LCD)
Keypad	4X4, 16keys
Power requirement	DC 12V 1Amp
Operating temperature	32 ° F~122 ° F(0 ° C~50 ° C)
Humidity	20%~90%RH
Dimensions	147 (L) X 119 (W) X 40 (H) mm
Relay	2 relay contact (Max. DC 12V 1Amp)

Ordering Information:

Reference models:

Taiwan Jantek Electronics., Ltd. www.jantek.com.tw
Add:6F-1, No. 1, Wuquan 1St.Rd.,Xinzhuang District, TEL : 886-2-22991255
New Taipei City 24892,Taiwan, R.O.C.

FAX : 02-2299-1257 / 02-2299-7412

Email : service@jantek.com.tw