


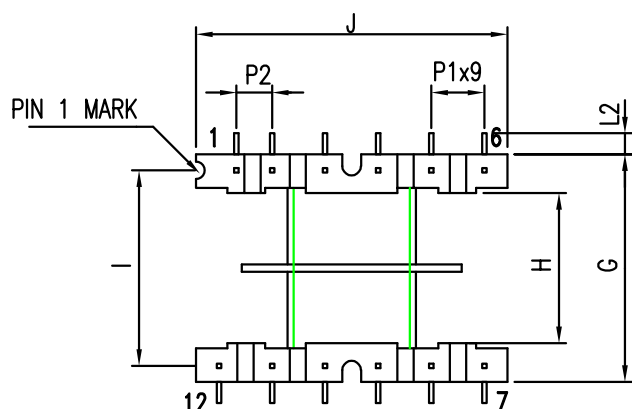


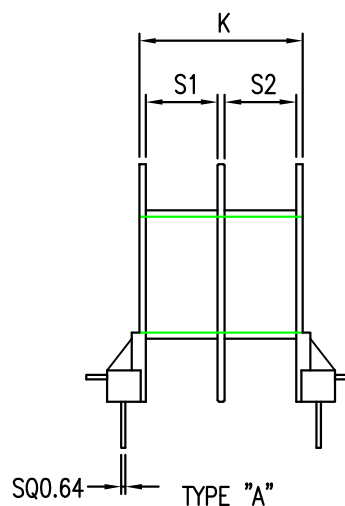

台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

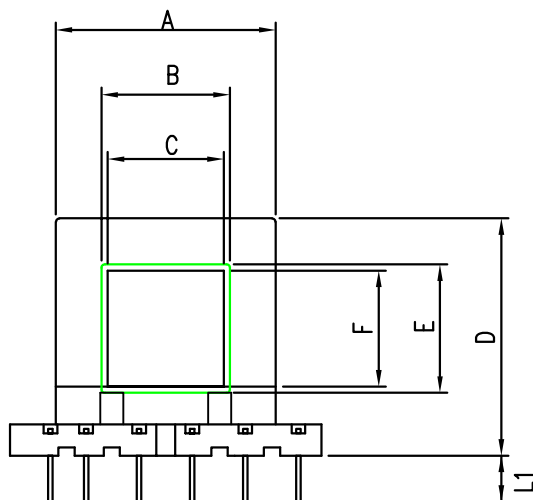

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.3	J ±0.2	K ±0.2	L1 ±0.3	L2 ±0.3	P1 ±0.2	P2 ±0.2	S1 ±0.2	S2 ±0.2	TYPE
EI 57-19.6-3-12PIN (0605704)	37.6	21.7	19.5	39.2	21.5	19.6	37.4	26.0	33.0	44.3	28.2	4.5	3.5	7.6	5.0	12.5	12.5	A
EI 57-19.6-2-12PIN (0605705)	37.7	21.7	19.5	39.2	21.5	19.6	37.4	26.0	33.3	44.3	28.2	4.5	3.5	7.6	5.0			B

DATE	REVISED STORY	MODEL :	EI-57-19.6-3-12PIN (TPI NO.:0605704)
6/01'02	RELEASED THE NEW DRAWING SPEC.		EI-57-19.6-2-12PIN (TPI NO.:0605705)
		BOBBIN MATERIAL :	Nylon 66/GF UL94HB PBT/GF; PET/GF UL94V-0
		PIN MATERIAL :	CP WIRE (TIN PLATED)
		DATE :	June 01,2002
		REV.:	A
		TOLERANCE :	.XXX±0.08 .XX ±0.1 .X ±0.2