



APPLICATIONS


The extremely flexible DTSC-200 controller is easily configured for a wide range of automatic transfer switch applications including Main-Gen, Gen-Gen or Main-Main systems using circuit breakers or latching contactors. Source transfer can be performed as open, delayed or closed transition with in-phase monitoring (synch check) that can be enabled for all transition types to ensure smooth transfer. The closed transition overlap time can be limited to less than 100 ms for momentary, make-before-break transfers, or extended indefinitely for paralleling via discrete input. "Custom" features like transfer inhibit, source selection, load shed/restore, elevator pre-signal and engine test programs come standard.

LogicsManager™ - Programmable Boolean logic functions along with ample, expandable discrete I/O allows for complex transfer schemes *without using external relay logic or a separate PLC!*

FlexApp™ - Easily configures the DTSC-200 for:


- **Utility-to-Generator**

Utility is preferred with a generator as the emergency source




- **Generator-to-Generator**

One genset is preferred with a second genset as backup



- **Utility-to-Utility**

Utility is preferred with second utility as the emergency source



DynamicsLCD™ - The graphic LCD interface with sealed soft-keys displays source voltage, frequency, phase rotation, current, real/reactive power, I/O status and alarms. Maintenance calls and event history (300 FIFO entries with real time clock and 6 year battery) are easily viewed and are password protected.

A line diagram with four high-intensity LEDs clearly displays source availability and breaker closed status.

The galvanically-isolated CANopen port permits connection of up to (2) Woodward IKD-1 modules, providing as much as 16 additional discrete inputs and outputs.

RS-485 Modbus RTU Slave full-duplex communication allows for remote annunciation and SCADA interface.

DTSC-200

Automatic Transfer Switch Controller

DESCRIPTION

I/Os

- **FlexRange™** - True R.M.S. 3-phase voltage measuring with separate inputs for 120 Vac (max. 150 Vac) or 480 Vac (max. 600 Vac) for both Source 1 and Source 2
- True R.M.S. 3-phase load current/power
- 12 configurable discrete inputs
- **LogicsManager™** - 9 programmable discrete outputs
- CANopen communication port
- RS-485 Modbus RTU Slave interface port

Monitoring (ANSI #)

- **Source monitoring**
 - Configurable fail and restore limits/timers for:
 - Over / under voltage (59/27)
 - Over / under frequency (810/U)
 - Voltage balance (47)
 - Phase rotation
- **Load monitoring**
 - Overload (32)
 - Overcurrent (50/51)
- **Switch monitoring**
 - Switch position feedback
 - Transfer failure
- Synch check (in-phase monitoring) (25)
- Battery over / under voltage
- Parallel time monitoring

Features


- Open, delayed or closed transition transfer
- In-phase monitoring (synch check)
- Make-before-break overlap time < 100 ms
- Extended parallel
- Preferred source selection
- Transfer and/or retransfer inhibit
- Load shed and/or restore
- Elevator pre-signal
- Engine exerciser (load/no-load) test
- Configurable via PC and/or front panel
- Multi-level password protection
- Multi-language capability (English & German included, other languages upon request)
- IKD-1 DI/DO expansion board connectivity
- Modem connectivity with DPC cable (P/N 5417-557)
- Remote control via RS-485 / CAN / discrete input signals

- For ATS control using circuit breakers or latching contactors
- Open, delayed or closed transition transfer
- In-Phase monitoring (synch check) for all transition types
- **LogicsManager™** programmable logic functions eliminate relay logic or PLC's
- **FlexApp™** technology for Main-Gen, Gen-Gen or Main-Main applications
- **FlexRange™** true R.M.S. voltage, current and power sensing
- **DynamicsLCD™** flexible, multifunctional display
- LEDs for source availability and breaker status
- Freely configurable, expandable discrete I/O
- Adjustable timers
- Source selection
- Transfer/return inhibit
- Extended parallel
- Load shed and restore
- Engine exerciser (load/no-load) routine with fully adjustable interval
- PC and/or front display configuration
- CANopen / Modbus RTU
- 6.5 - 40.0 Vdc powered
- CE marked
- UL/cUL Listed

SPECIFICATIONS

Power supply	12/24 Vdc (6.5 to 40.0 Vdc; not buffered)	Discrete inputs	isolated
Inrush current	max. 50 A peak, 1 ms	Input range	12/24 Vdc (8 to 40.0 Vdc)
Input capacitance	2000 µF	Input resistance	approx. 20 kΩ
Intrinsic consumption	max. 8 W	Discrete outputs Group A [R 1-4]	isolated
	in power save mode (backlight, relays off)	Contact material	AgCdO
Ambient temperature (operation)	-20 to 60 °C / -4 to 140 °F	Load (GP)	2.00 Aac@250 Vac / 2.00 Adc@24 Vdc
Ambient temperature (storage)	-30 to 80 °C / -22 to 176 °F	Discrete output Engine Start [R5]	isolated
Max. operating altitude	2000 m (6,500 ft)	Contact material	AgNi 90/10
Ambient humidity	95 %, non-condensing	Load (GP)	10.00 Aac@250 Vac
Voltage	(both ranges within one unit on different terminals, $\sqrt{2}$)	Discrete outputs Group B [R 6-9]	isolated
100 Vac [1]	Rated (V_{rated})	Contact material	AgNi 90/10
	Max. value (V_{max})	Load (GP)	10.00 Aac@250 Vac
	Rated ($V_{phase-ground}$)	RS-485 interface	isolated 500 Vac
	Rated surge volt. (V_{surge})	CAN bus interface	isolated 500 Vac
and 400 Vac [4]	Rated (V_{rated})	Housing	Flush
	Max. value (V_{max})	Dimensions	Flush
	Rated ($V_{phase-ground}$)	Front cutout	Flush
	Rated surge volt. (V_{surge})	Material	glass fiber-reinforced plastic
Accuracy	Class 1	Connection	screw/plug terminals AWG 14 / 2.5 mm²
Measurable alternator windings	3p-3w, 3p-4w, 1p-2w, 1p-3w	Front	insulating surface
Setting range	primary	Protection system	with proper installation
Linear measuring range	1.25× V_{rated}	Front	IP54 (with clamp fastening)
Measuring frequency	50/60 Hz (40 to 70 Hz)	Front	IP65 (with screw fastening)
Input resistance per path	[1] 0.498 MΩ, [4] 2.0 MΩ	Back	IP20
Max. power consumption per path	< 0.15 W	Weight	approx. 800 g (1.75 lb)
Current	Rated (I_{rated})	Disturbance test (CE)	tested acc. to applicable EN guidelines
	Linear measuring range	Listings	UL/cUL listed, Ordinary Locations, File No.: 231544
	Burden		
	Rated short-time current (1 s)		

DIMENSIONS

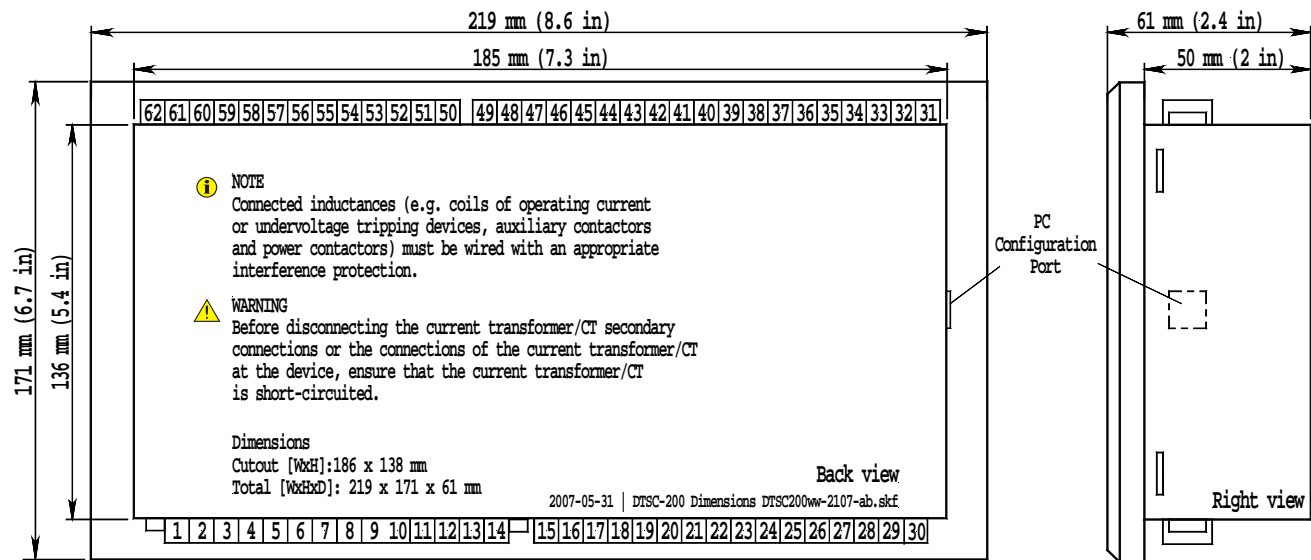

PART NUMBERS AND ORDER CODES

Model	Rated PT secondary <i>FlexRange™</i>	Rated CT secondary	Part Number (P/N)	Description
200	69/120 Vac <i>and</i>	..5 A	8440-1779	DTSC-200-55B
	277/480 Vac	..1 A	8440-1778	DTSC-200-51B

Subject to technical modifications.

International
Woodward
PO Box 1519
Fort Collins CO, USA
80522-1519
1000 East Drake Road
Fort Collins CO 80525
Ph: +1 (970) 482-5811
Fax: +1 (970) 498-3058

Europe
Woodward GmbH
Handwerkstrasse 29
70565 Stuttgart, Germany
Ph: +49 (0) 711 789 54-0
Fax: +49 (0) 711 789 54-100
email: stgt-info@woodward.com

Distributors & Service
Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

www.woodward.com/power

For more information contact:

Subject to technical modifications.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

We appreciate your comments about the content of our publications. Please send comments including the document number below to
stgt-doc@woodward.com

© Woodward

All Rights Reserved

37398A - 2008/11/Stuttgart

FEATURES OVERVIEW

Digital Transfer Switch Controller		DTSC-200
Measuring		
Source voltage (3phase/4-wire)	rated 69/120 Vac	✓
- True R.M.S.	max. 86/150 Vac	✓
- <i>FlexRange™</i>	rated 277/480 Vac	✓
	max. 346/600 Vac	✓
Load current #1 (3phase/4-wire, true RMS)	../1 A or ../5 A	✓
Breaker Control		
Open transition (break-before-make)		✓
Delayed transition (break-before-make) + timed neutral position		✓
Closed transition (make-before-break)		✓
Application		
Utility to generator		✓
Utility to utility		✓
Generator to generator (2 start signals)		✓
Features		
Programmable elevator pre-signal		✓
Programmable motor load disconnect signal		✓
Transfer commit		✓
Test modes #2		✓
Transfer mode selector #2		✓
Load shed #2		✓
Shunt trip enable #2		✓
Extended parallel time #2		✓
Automated display backlight shutdown selectable		✓
Daylight saving time		✓
Source priority selection #2		✓
Vector group adjustment for in-phase monitoring		✓
Fully adjustable timers #3		✓
Status LEDs for source availability and breaker state		✓
Accessories		
Soft-keys (advanced LC display)	<i>DynamicsLCD™</i>	✓
Configuration via PC #4		✓
Event recorder with real time clock (battery backup)		300
Flush-mounting (screw or clamp fastening)		✓
Monitoring ANSI#		
Source: voltage	59/27	✓
Source: frequency	810/81U	✓
Source: voltage asymmetry	47	✓
Source: rotation field		✓
Load: overload	32	✓
Load: overcurrent	50/51	✓
Switch: plausible switch position		✓
Switch: transition failure		✓
Battery: voltage		✓
Synch check (inphase monitoring)	25	✓
Parallel time monitoring		✓
I/Os		
Discrete inputs (configurable)		12
Discrete outputs (configurable)	<i>LogicsManager™</i>	9
Direct configuration interface #4		✓
CANopen communication bus (isolated)		✓
RS-485 Modbus RTU Slave full/half-duplex (isolated)		✓
Listings/Approvals		
UL/cUL Listed		✓
CE Marked		✓

#1 Selection during order; both ../5 A (standard) or both ../1 A (alternatively)

#2 via internal conditions or remote command

#3 neutral delay timers (1 to 6500 s), elevator pre-signal timers (1 to 6500 s), motor load disconnect timers (1 to 6500 s), stable timers (1 to 6500 s), outage timers (0.1 to 10.0 s), engine start delay timers (1 to 300 s)

#4 Configuration software available free at Woodward.com, connection requires Woodward DPC cable P/N 5417-557