

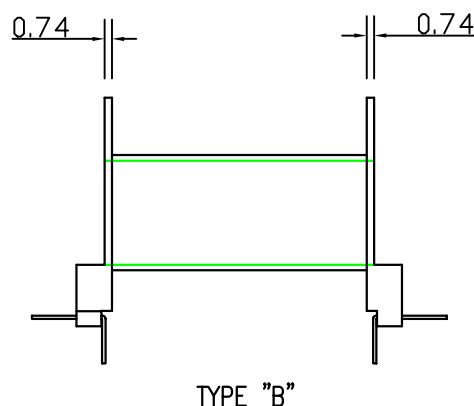
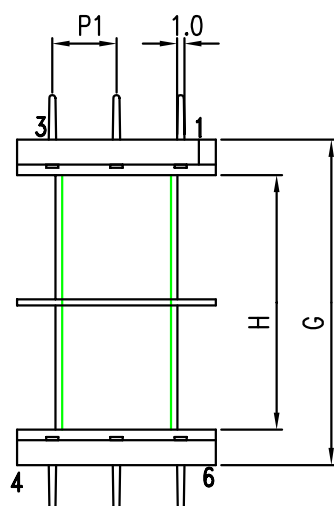


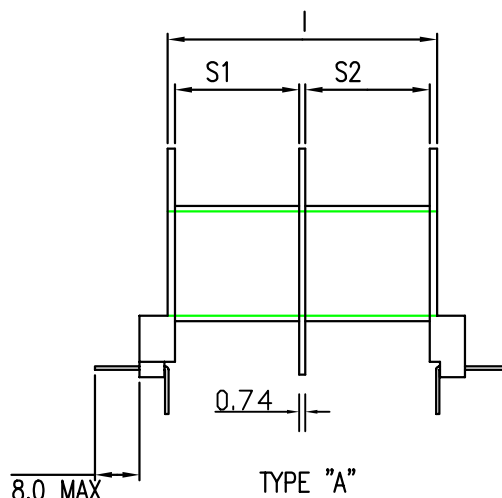

台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

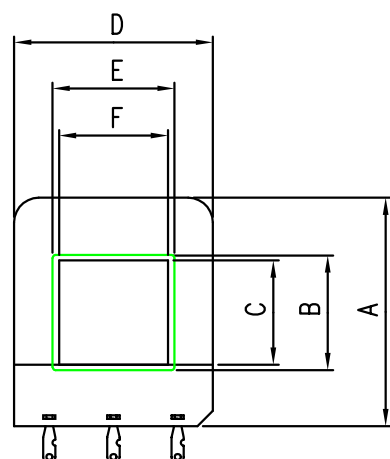

UNIT : mm

DIMS MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.2	S1 ±0.2	S2 ±0.2	P1 ±0.2	TYPE
UI 29x6.8-3-6PIN (0902901)	16.5	8.4	7.0	18.5	11.3	9.8	38.3	27.0	28.2	13.1	13.1	4.7	A
UI 29x6.8-2-6PIN (0902904)	16.6	8.4	7.0	18.6	11.4	9.8	38.3	27.0	28.3			4.7	B
UI 29x10.2-3-6PIN (0902902)	20.5	12.2	10.2	18.6	11.5	9.7	37.7	27.1	28.3	13.2	13.2	4.7	A
UI 29x10.2-2-6PIN (0902903)	20.5	12.2	10.2	18.6	11.5	9.7	37.7	27.1	28.3			4.7	B

DATE	REVISED STORY	MODEL:
6/01'02	RELEASED THE NEW DRAWING SPEC.	UI 29x6.8-3-6PIN (TPI NO.:0902901) UI 29x10.2-3-6PIN (TPI NO.:0902902) UI 29x6.8-2-6PIN (TPI NO.:0902904) UI 29x10.2-2-6PIN (TPI NO.:0902903)
		BOBBIN MATERIAL : Nylon 66/GF UL94HB; PBT/GF UL94V-0 PIN MATERIAL : PHOSPHORUS BRONZE (TIN PLATED)
		DATE : June 01,2002 REV. : A TOLERANCE : .XXX±0.08 .XX ±0.1 .X ±0.2