




台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

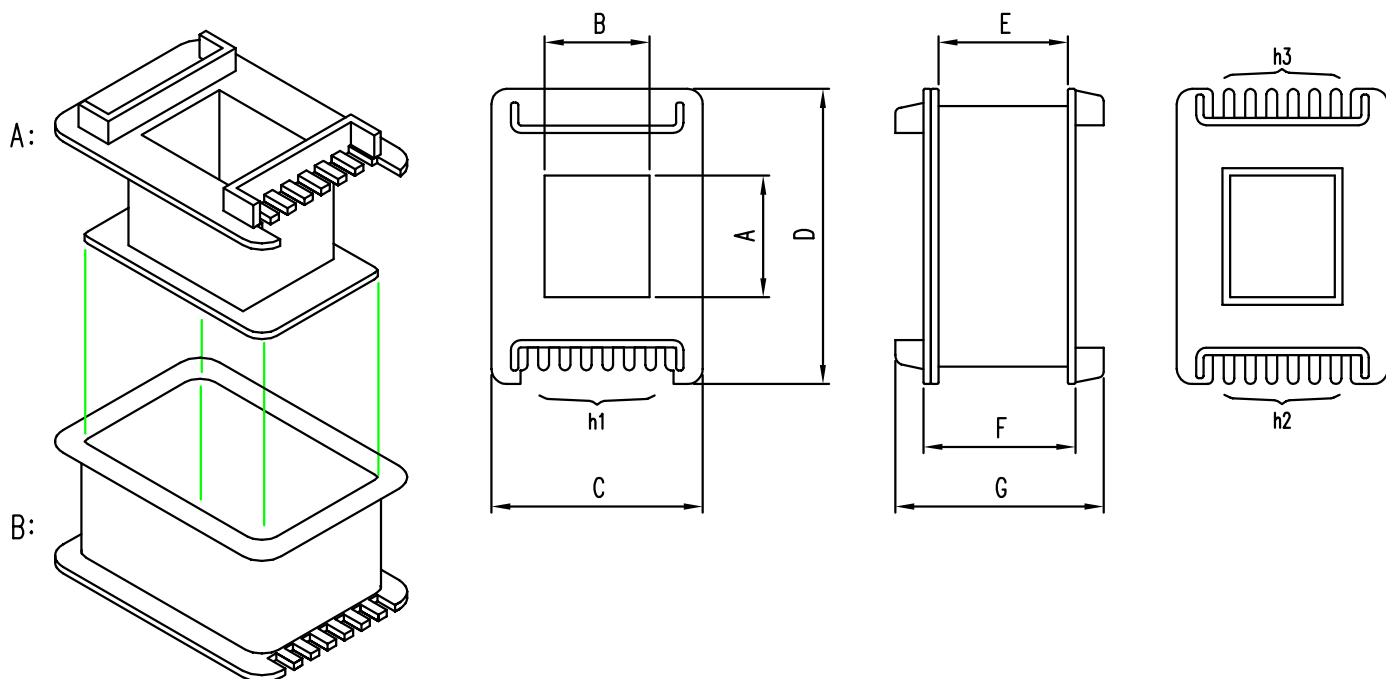

UNIT : mm

MODEL	(TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	h1	h2	h3
EI 41-16	(0404101)	15.9	13.8	27.8	38.8	17.0	20.1	27.7	4	4	4
EI 57-25	(0405701)	25.4	19.8	37.2	50.9	24.5	28.3	38.2	4	5	5
EI 60-28	(0406001)	27.9	20.5	38.8	57.8	25.3	29.5	39.2	4	5	5
EI 66-25	(0406601)	25.0	22.6	39.2	40.6	29.5	32.5	38.3			
EI 66-30	(0406602)	30.7	22.8	43.5	62.1	28.4	33.2	42.7	5	5	5
EI 66-36.5	(0406603)	36.6	22.8	43.2	67.9	28.0	33.0	42.9	4	5	5
EI 76-31	(0407601)	31.7	26.4	50.0	59.7	33.4	37.7	51.8	5	5	5
EI 76-40	(0407602)	41.5	26.5	49.6	69.7	33.2	37.3	51.7	5	5	5
EI 86-40	(0408601)	42.2	29.6	57.0	77.5	37.4	42.2	51.5	6	6	6
EI 96-57	(0409601)	57.8	33.0	63.0	96.8	42.2	47.2	55.0	5	8	8

DATE	REVISED STORY	MODEL : EI 41 ~ EI 96 VDE TYPE		
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : A: Nylon 66/GF UL94HB; PBT/GF UL94V-0 B: Nylon 66/GF UL94HB		
		DATE : June 01,2002	REV.: A	TOLERANCE : .XXX±0.08 .XX ±0.1 .X ±0.2