




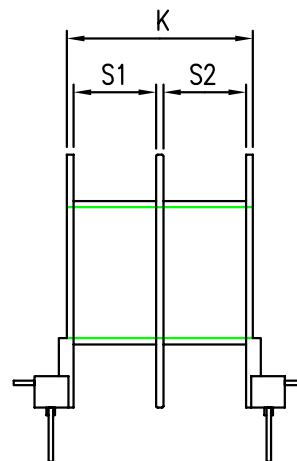


台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

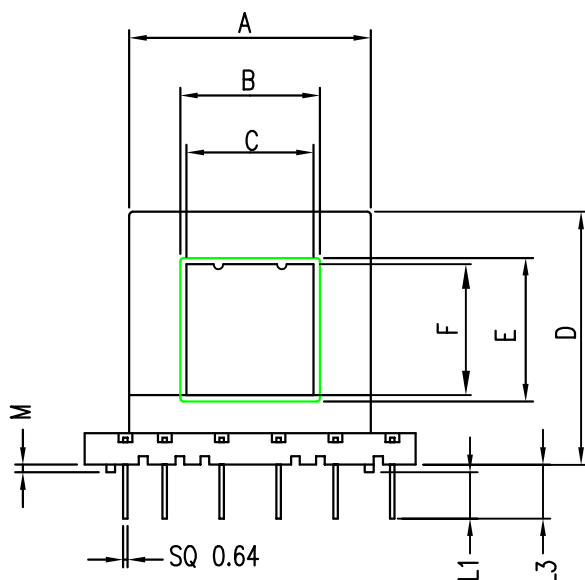

TYPE "A"

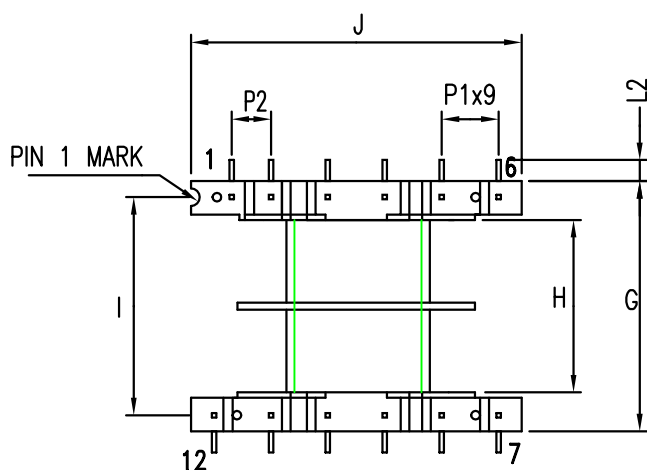

TYPE "B"

MODEL (TPI NO.)	UNIT : mm																			TYPE
	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.3	J ±0.2	K ±0.2	L1 ±0.3	L2 ±0.3	L3 ±0.3	M ±0.1	P1 ±0.2	P2 ±0.2	S1 ±0.1	S2 ±0.1	
EI-41-13.5-3-12PIN (0604103)	28.1	15.1	13.4	29.3	15.3	13.4	29.0	18.1	24.2	41.0	20.3	3.8	3.2	4.8	1.0	6.2	5.0	8.6	8.6	A
EI-41-13.5-2-12PIN (0604104)	28.1	15.1	13.4	29.2	15.3	13.5	29.0	18.1	24.1	41.0	20.3	3.8	3.2	4.8	1.0	6.3	5.0	8.6	8.6	B

DATE	REVISED STORY	MODEL : EI-41-13.5-3-12PIN (TPI NO.:0604103) EI-41-13.5-2-12PIN (TPI NO.:0604104)		
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : 0604103 Nylon 66/GF UL94HB 0604104 PBT/GF UL94V-0		
		PIN MATERIAL : CP WIRE (TIN PLATED)		
		DATE : June 01,2002	REV. : A	TOLERANCE : .XXX±0.08 .XX ±0.1 .X ±0.2