




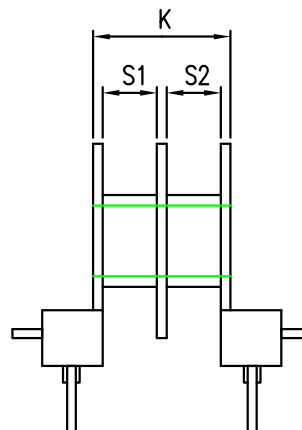


台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

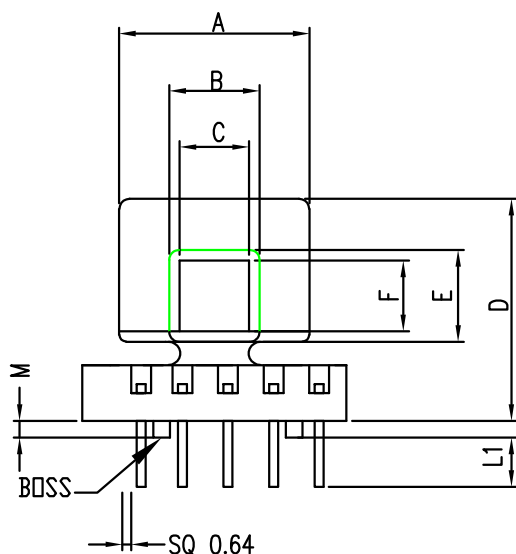

TYPE "A"

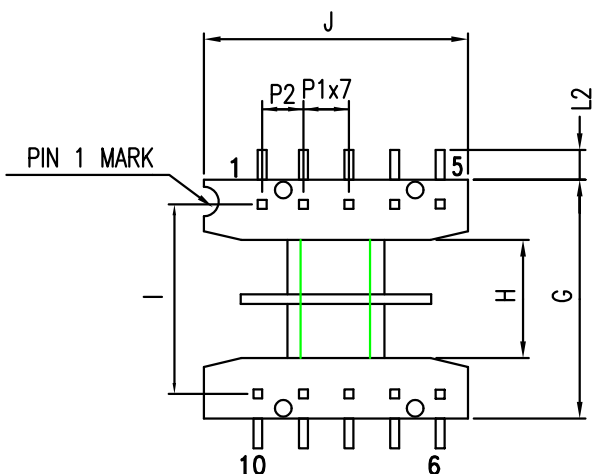

TYPE "B"

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.3	J ±0.2	K ±0.2	L1 ±0.3	L2 ±0.3	M ±0.2	P1 ±0.2	P2 ±0.2	S1	S2	TYPE
EI-25-7-2-10PIN (0602501)	18.2	9.0	6.8	20.5	8.8	6.8	20.6	10.1	15.7	26.2	12.1	3.7	3.4	0.9	5.0	3.8	/	/	B
EI-25-7-3-10PIN (0602502)	18.2	8.8	7.0	21.1	8.6	7.0	19.8	10.2	15.6	26.2	12.3	3.5	3.2	0.9	5.0	3.9	4.6	4.6	A

DATE	REVISED STORY	MODEL :	EI-25-7-2-10PIN (TPI NO.:0602501)	EI-25-7-3-10PIN (TPI NO.:0602502)
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL :	Nylon 66/GF UL94HB	PBT/GF; PET/GF UL94V-0
		PIN MATERIAL :	CP WIRE (TIN PLATED)	
		DATE :	June 01,2002	REV. : A
		TOLERANCE :	.XXX±0.08 .XX ±0.1 .X ±0.2	