

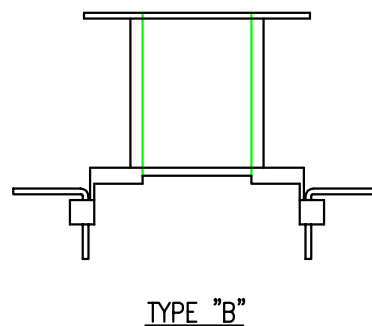
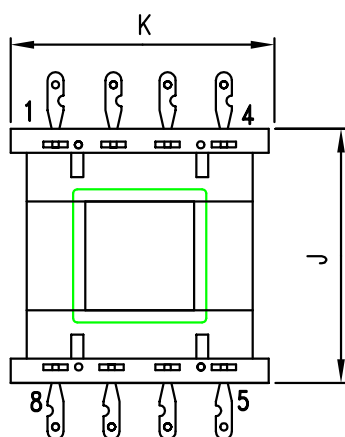


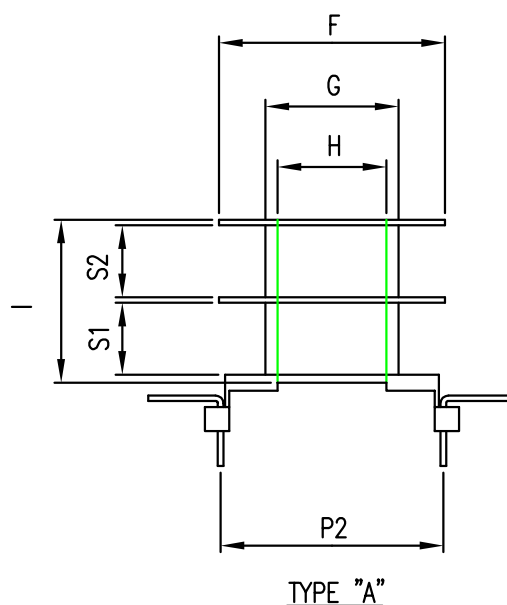

台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

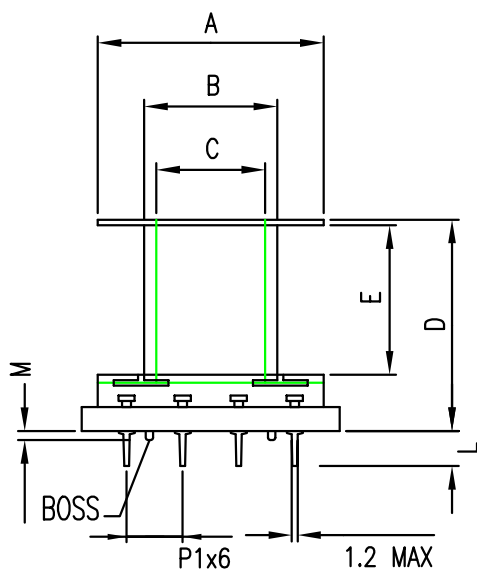

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.3	H ±0.2	I ±0.2	J ±0.2	K ±0.3	M ±0.2	L ±0.3	P1 ±0.2	P2 ±0.3	S1 ±0.2	S2 ±0.2	TYPE
EI 41-13.6-3-8PIN (0704103)	28.1	15.6	13.5	26.9	18.7	28.5	15.6	13.6	20.6	31.2	28.2	1.0	5.4	6.4	27.7	9.0	9.0	A
EI 41-13.6-3-8PIN (0704116)	28.3	15.6	13.5	27.0	18.8	28.5	15.6	13.6	20.6	31.2	28.2	/	5.4	6.4	27.7	9.0	9.0	A
EI 41-13.6-2-8PIN (0704104)	28.3	15.6	13.5	27.0	18.8	28.5	15.6	13.6	20.6	31.2	28.2	1.0	5.4	6.4	27.7	/	/	B
EI 41-13.6-2-8PIN (0704117)	28.3	15.6	13.5	27.0	18.8	28.6	15.7	13.6	20.6	31.2	28.2	/	5.4	6.4	27.7	/	/	B

DATE	REVISED STORY	MODEL : EI-41-13.6-3-8PIN (TPI NO.:0704103) EI-41-13.6-2-8PIN (TPI NO.:0704104) EI-41-13.6-3-8PIN (TPI NO.:0704116) EI-41-13.6-2-8PIN (TPI NO.:0704117)		
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : Nylon 66/GF UL94HB ; PBT/GF UL94V-0		
		PIN MATERIAL : PHOSPHORUS BRONZE (TIN PLATED)		
		DATE : June 01,2002	REV.: A	TOLERANCE : .XXX±0.08 .XX ±0.1 .X ±0.2