




台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

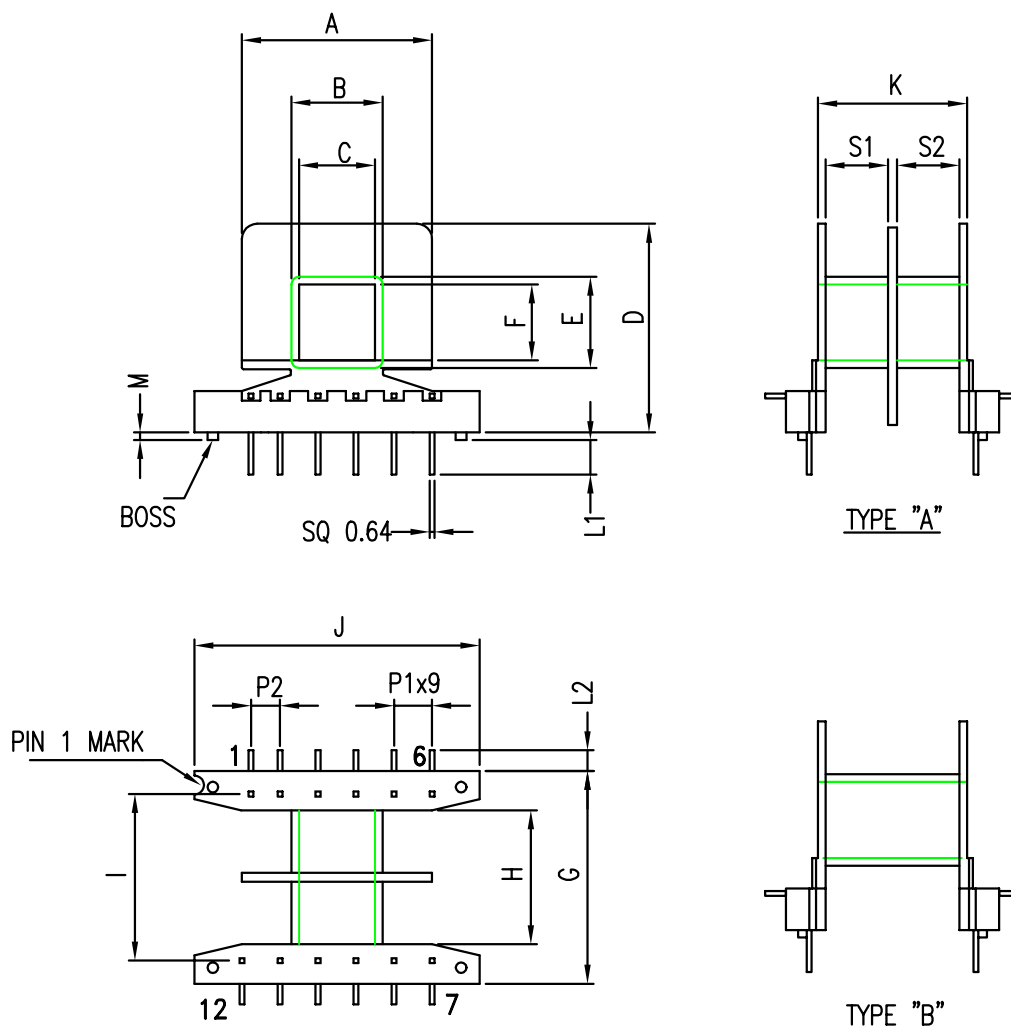

UNIT : mm																				
MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.3	H ±0.3	I ±0.3	J ±0.2	K ±0.2	L1 ±0.3	L2 ±0.3	M ±0.1	P1 ±0.2	P2 ±0.2	S1 ±0.1	S2 ±0.1	TYPE	
EI 35-10-3-12PIN (0603502)	25.0	12.1	10.0	25.6	12.1	10.0	26.5	16.5	22.0	37.5	18.6	3.5	3.1	1.0	5.0	3.7	7.9	7.9	A	
EI 35-10-2-12PIN (0603503)	25.0	12.1	10.0	25.6	12.1	10.0	26.5	16.5	22.0	37.5	18.6	3.5	3.1	1.0	5.0	3.7			B	

DATE	REVISED STORY	MODEL : EI-35-10-3-12PIN (TPI NO.:0603502) EI-35-10-2-12PIN (TPI NO.:0603503)		
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : Nylon 66/GF UL94HB PBT/GF; PET/GF UL94V-0		
		PIN MATERIAL : CP WIRE (TIN PLATED)		
		DATE : June 01,2002	REV.: A	TOLERANCE : .XXX±0.08 .XX ±0.1 .X ±0.2