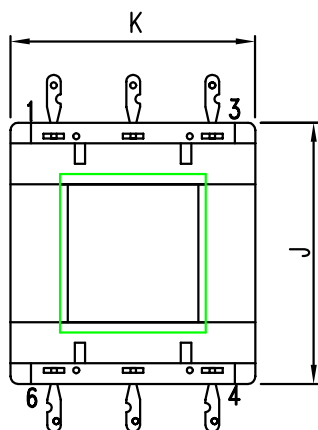
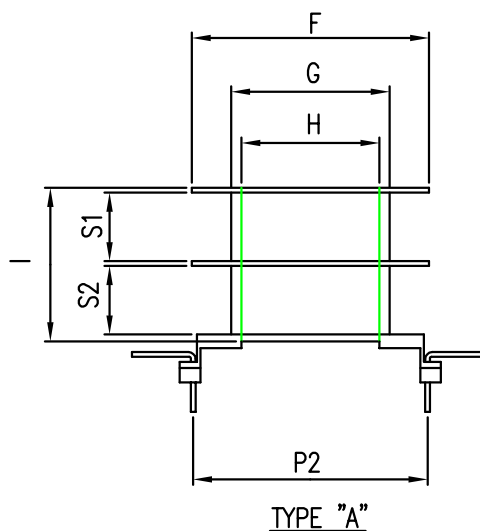
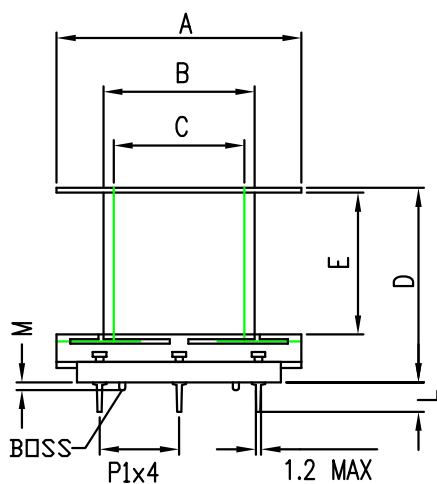


UNIT : mm																		TYPE
MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.2	J ±0.2	K ±0.2	M ±0.1	L ±0.3	P1 ±0.2	P2 ±0.3	S1 ±0.1	S2 ±0.1	
□ 48-16.8-3-6PIN (0704801)	31.5	18.5	16.8	31.6	21.9	31.4	18.5	16.8	23.8	36.2	31.4	1.5	5.4	10.2	32.8	10.5	10.6	A
□ 48-16.8-2-6PIN (0704802)	31.5	18.5	16.8	31.6	21.9	31.4	18.4	16.8	23.8	36.2	31.4	1.5	5.4	10.2	32.8			B

DATE	REVISED STORY	MODEL : EI-48-16.8-3-6PIN (TPI NO.: 0704801) EI-48-16.8-2-6PIN (TPI NO.: 0704802)		
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : Nylon 66/GF UL94HB; PBT/GF UL94V-0		
		PIN MATERIAL : PHOSPHORUS BRONZE (TIN PLATED)		
		DATE : June 01,2002	REV.: A	TOLERANCE :