




台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

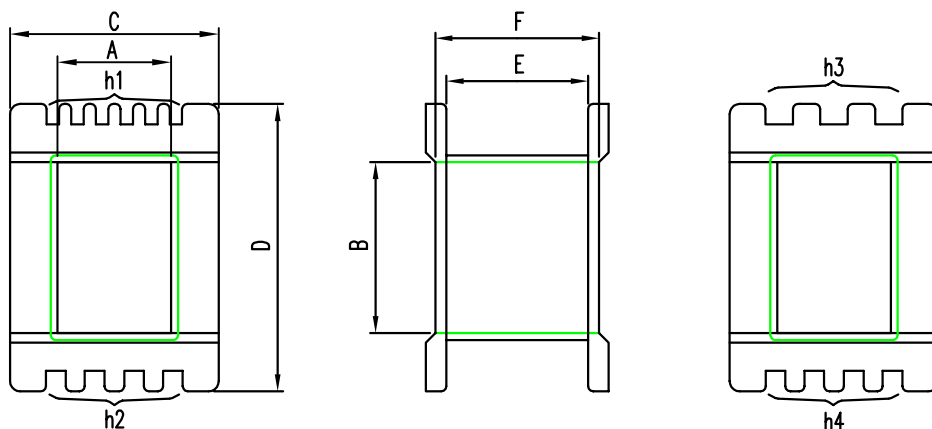

UNIT : mm

MODEL	(TPI NO.)	A ±0.3	B ±0.3	C ±0.3	D ±0.3	E ±0.3	F ±0.3	h1	h2	h3	h4
EI 10-3.4	(0101001)	2.8	3.9	7.2	9.0	4.7	5.3	3	3	3	3
EI 24-7	(0102401)	6.4	7.2	17.5	19.7	10.5	11.7	3	3	3	4
EI 28-11	(0102801)	8.7	11.2	19.6	24.5	14.5	16.1	2	2	2	3
EI 35-10	(0103501)	10.7	10.8	24.8	27.9	17.2	19.0			3	4
EI 35-13	(0103502)	10.6	13.0	24.5	29.7	16.9	18.8	3	4	4	6
EI 41-12.5	(0104101)	13.6	12.5	28.7	28.2	18.5	20.4	3		3	4
EI 41-14.5	(0104102)	14.4	14.5	27.6	29.6	17.9	20.2			5	7
EI 41-16.5	(0104103)	14.0	16.7	26.4	32.4	19.0	20.6	3	4	4	7
EI 41-17.5	(0104104)	13.7	17.5	28.3	34.4	18.4	20.8	3	4		
EI 41-20	(0104105)	13.3	20.7	28.5	37.3	19.1	20.9	5		5	5
EI 48-16A	(0104801)	16.7	16.4	30.3	32.1	22.0	23.8	2	2		
EI 48-16	(0104802)	16.5	16.1	31.3	33.8	21.3	23.4	5	3	5	7
EI 48-18.5	(0104803)	16.5	18.7	31.5	36.4	21.8	23.7	7		4	5
EI 48-21	(0104804)	16.7	20.6	31.5	39.3	21.5	23.5	5	5		
EI 48-21.5	(0104805)	16.7	21.5	31.6	38.1	20.5	23.6				5
EI 48-25	(0104806)	16.8	25.0	30.5	42.0	20.9	23.5	3	7		
EI 54-21.5	(0105401)	18.6	21.7	35.4	42.4	23.3	26.3				5

DATE	REVISED STORY	MODEL : EI 10 ~EI 54 (ONE SEC SERIES)	
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : PBT/GF;PET/GF UL94V-0 Nylon 66/GF UL94HB ; Nylon 66 UL94V-2	
		DATE : June 01,2002	REV.: A
		TOLERANCE : .XXX±0.08 .XX ±0.1 .X ±0.2	