




台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

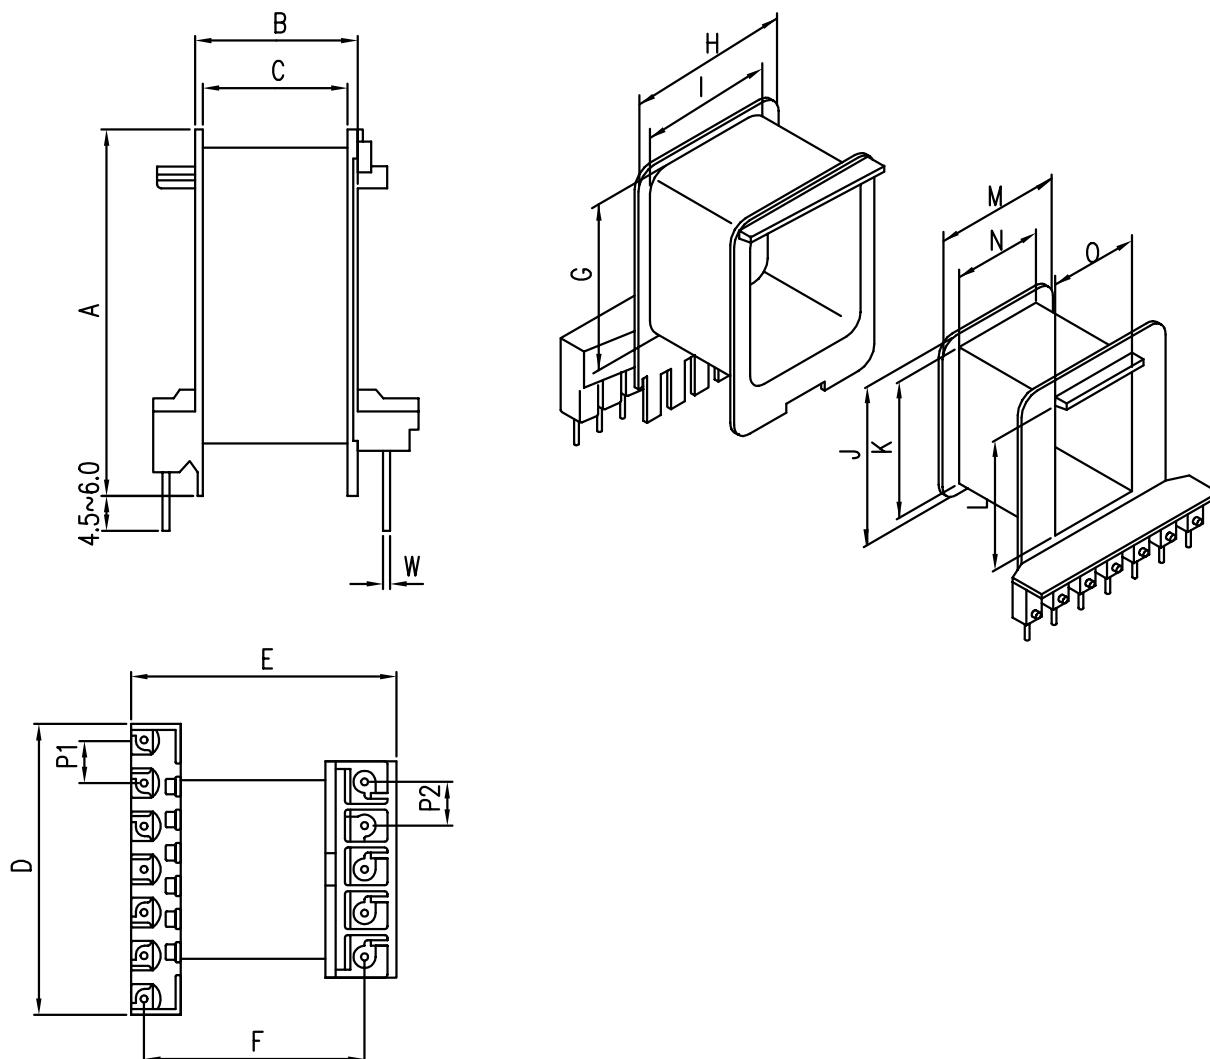

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.3	G ±0.2	H ±0.2	I ±0.2	J ±0.2	K ±0.2	L ±0.2	M ±0.2	N ±0.2	O ±0.2	P1 ±0.2	P2 ±0.2	W
EI 35-18.4-7PIN (0503505)	40.2	19.1	14.8	28.0	42.3	38.0	30.2	24.4	20.5	27.7	23.4	18.5	18.4	12.1	10.0	7.5	7.5	Ø0.8
EI 57-27-12PIN (0505705)	53.9	28.4	24.9	49.2	45.0	37.1	42.5	36.9	30.3	39.5	29.0	27.0	27.8	21.4	19.4	7.2	7.5	Ø1.0
EI 57-30-17PIN (0505709)	56.0	28.3	24.6	53.4	46.3	37.7	45.0	37.6	30.0	42.2	32.0	30.0	27.6	21.6	19.6	5.5	7.0	Ø1.2
EI 57-35-12PIN (0505706)	62.0	28.5	24.6	49.3	45.0	37.3	50.6	36.6	30.2	47.8	37.4	35.0	27.8	21.3	19.3	7.4	7.5	Ø1.2
EI 66-30-13PIN (0506603)	60.9	33.0	29.0	56.6	51.0	42.5	46.6	42.5	35.2	44.0	32.3	30.0	32.4	24.6	22.2	7.4	7.5	Ø1.0

DATE	REVISED STORY	MODEL : EI 35 ~ EI 66 HORIZONTAL PC PIN TYPE (VDE)		
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : PBT/GF UL94V-0		
		PIN MATERIAL : CP WIRE (TIN PLATED)		
		DATE : June 01,2002	REV. : A	TOLERANCE :