




台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

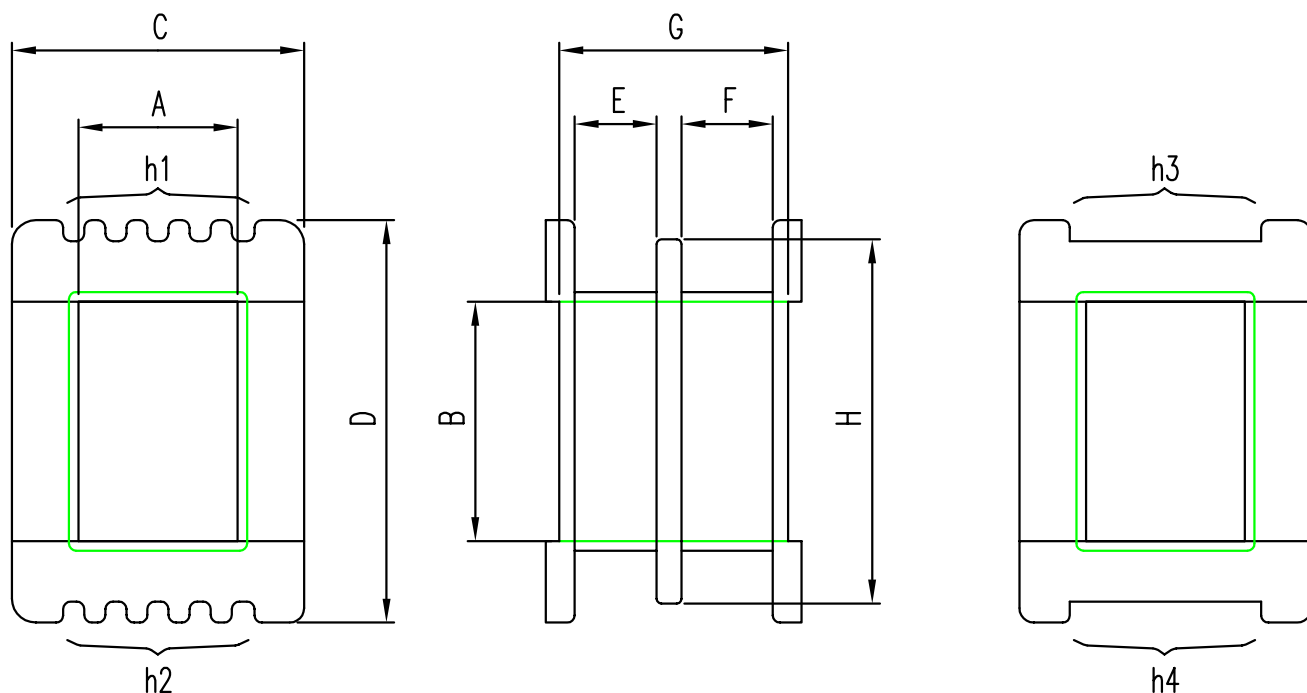

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.3	D ±0.3	E ±0.2	F ±0.2	G ±0.2	H ±0.2	h1	h2	h3	h4
EI 35-10 (0203501)	10.0	10.2	24.3	26.0	7.3	8.5	19.1	22.2	2	3		
EI 35-12.7 (0203503)	10.3	12.9	24.5	29.6	7.3	8.0	18.9	25.8	2	3		
EI 35-13 (0203502)	10.3	13.9	24.4	29.1	7.2	7.8	18.4	28.4	3	3	4	7
EI 41-14 (0204101)	13.6	14.0	28.0	29.8	7.6	7.9	20.2	29.5	7		3	5
EI 48-21.5 (0204802)	16.7	21.6	31.0	38.1	9.3	9.6	23.3	34.4	5	5		
EI 48-25 (0204803)	16.8	25.7	31.2	44.3	8.9	10.1	23.7	42.0	5	5		
EI 54-21.5 (0205401)	18.7	21.7	35.4	42.3	10.3	11.1	26.4	41.0	5	5		
EI 57-19 (0205702)	19.3	19.4	36.5	41.5	10.0	13.7	28.2	41.2	2	2	5	
EI 57-19 (0205703)	19.5	19.5	37.4	39.0	12.3	12.3	28.2	38.0	7	7	7	7

DATE	REVISED STORY	MODEL : EI 35 ~ EI 57 (2SEC SERIES)	
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : PET/GF; PBT/GF UL94V-0 Nylon 66 UL94V-2; Nylon 66/GF UL94HB	
		DATE : June 01,2002	REV.: A
		TOLERANCE :	.XXX±0.08 .XX ±0.1 .X ±0.2