

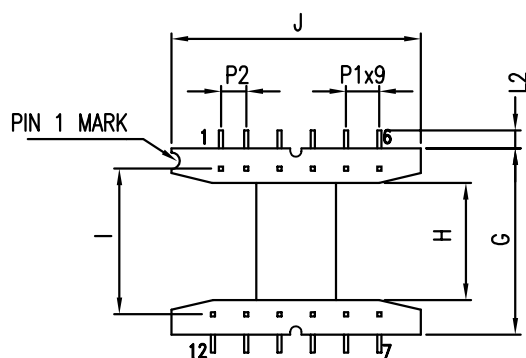







台灣高分子工業股份有限公司  
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

TPI NO.: 0604801

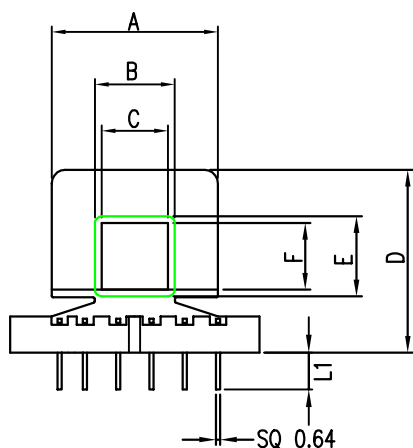

TPI NO.: 0604802

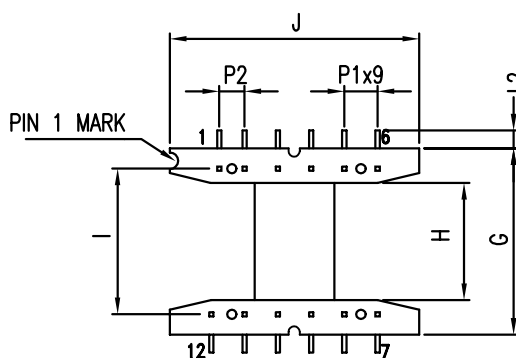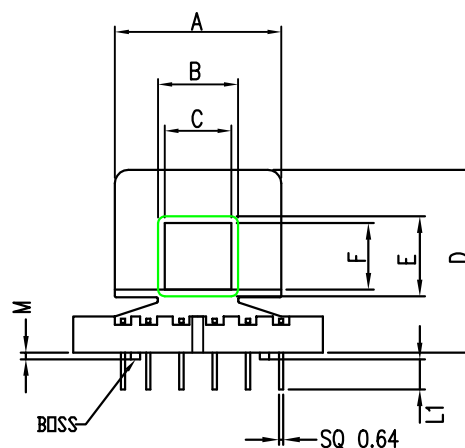

UNIT : mm

| MODEL<br>(TPI NO.)              | DIMS | A<br>±0.2 | B<br>±0.2 | C<br>±0.2 | D<br>±0.2 | E<br>±0.2 | F<br>±0.2 | G<br>±0.3 | H<br>±0.3 | I<br>±0.3 | J<br>±0.2 | K<br>±0.2 | L1<br>±0.3 | L2<br>±0.3 | M<br>±0.1 | P1<br>±0.2 | P2<br>±0.2 | S1<br>±0.1 | S2<br>±0.1 |
|---------------------------------|------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|-----------|------------|------------|------------|------------|
| EI-48-16.7-2-12PIN<br>(0604801) |      | 31.3      | 18.4      | 16.4      | 32.1      | 18.4      | 16.4      | 32.9      | 21.2      | 27.6      | 44.5      | 23.6      | 4.8        | 3.1        | /         | 7.6        | 5.1        | /          | /          |
| EI-48-16.7-2-12PIN<br>(0604802) |      | 31.3      | 18.4      | 16.4      | 32.1      | 18.2      | 16.4      | 32.7      | 21.2      | 27.3      | 44.5      | 23.5      | 3.8        | 3.1        | 1.1       | 7.6        | 5.1        | /          | /          |

|         |                                |                                                                                      |            |                                              |
|---------|--------------------------------|--------------------------------------------------------------------------------------|------------|----------------------------------------------|
| DATE    | REVISED STORY                  | MODEL : EI-48-16.7-2-12PIN (TPI NO.:0604801)<br>EI-48-16.7-2-12PIN (TPI NO.:0604802) |            |                                              |
| 6/01'02 | RELEASED THE NEW DRAWING SPEC. | BOBBIN MATERIAL : Nylon 66/GF UL94HB<br>PBT/GF; PET/GF UL94V-0                       |            |                                              |
|         |                                | PIN MATERIAL : CP WIRE (TIN PLATED)                                                  |            |                                              |
|         |                                | DATE :<br>June 01,2002                                                               | REV.:<br>A | TOLERANCE : .XXX±0.08<br>.XX ±0.1<br>.X ±0.2 |