




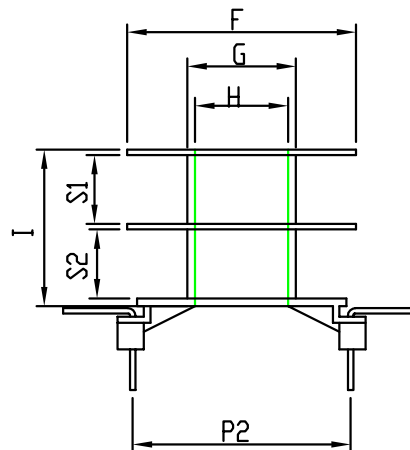


台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

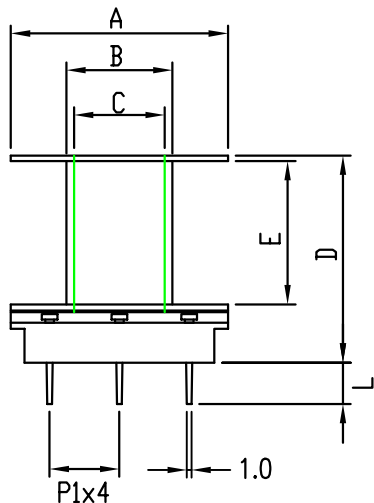

TYPE "A"

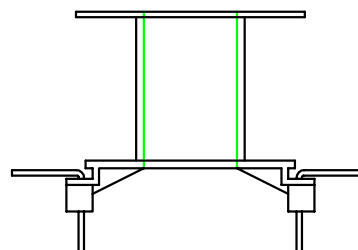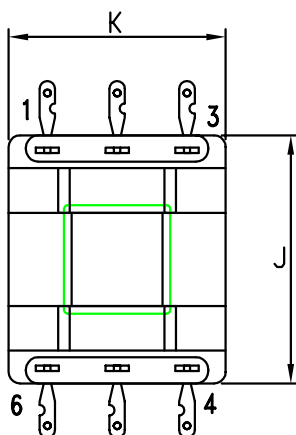

TYPE "B"

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.2	J ±0.2	K ±0.2	L ±0.3	S1 ±0.2	S2 ±0.2	P1 ±0.2	P2 ±0.3	TYPE
EI 25-7-2-6PIN (0702501)	18.5	8.6	7.1	17.7	10.2	19.0	8.6	7.1	12.4	21.8	18.5	5.3	/	/	6.3	18.5	B
EI 25-7-3-6PIN (0702504)	18.6	8.4	7.0	17.5	10.3	19.0	8.1	7.0	12.2	23.8	18.7	5.3	4.7	4.7	5.0	20.0	A
EI 25-7-2-6PIN (0702505)	18.1	8.3	6.8	16.4	11.0	18.1	7.9	6.8	12.7	23.5	18.4	5.3	/	/	5.0	19.6	B

DATE	REVISED STORY	MODEL : EI-25-7-2-6PIN (TPI NO.:0702501) EI-25-7-2-6PIN (TPI NO.:0702505) EI-25-7-3-6PIN (TPI NO.:0702504)	
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : Nylon 66/GF UL94HB; PBT/GF UL94V-0 PIN MATERIAL : PHOSPHORUS BRONZE (TIN PLATED)	
		DATE : June 01,2002	REV.: A
		TOLERANCE : .XXX±0.08 .XX ±0.1 .X +0.2	