

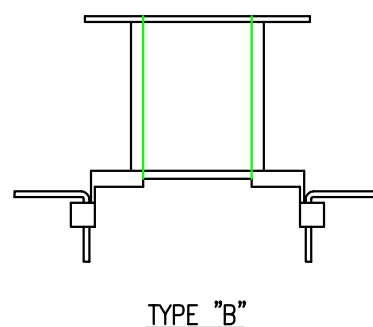


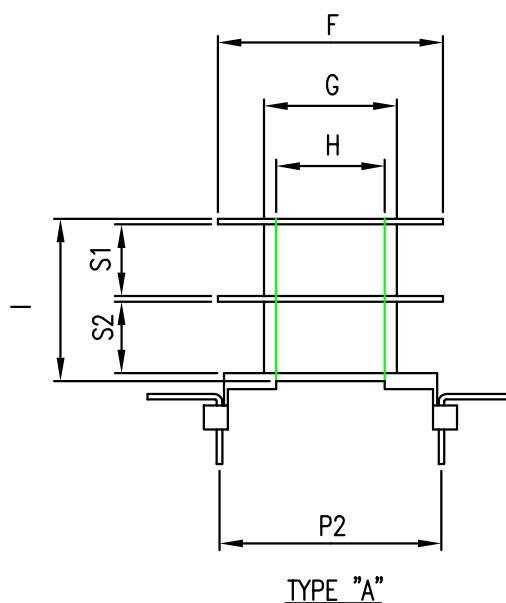

台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

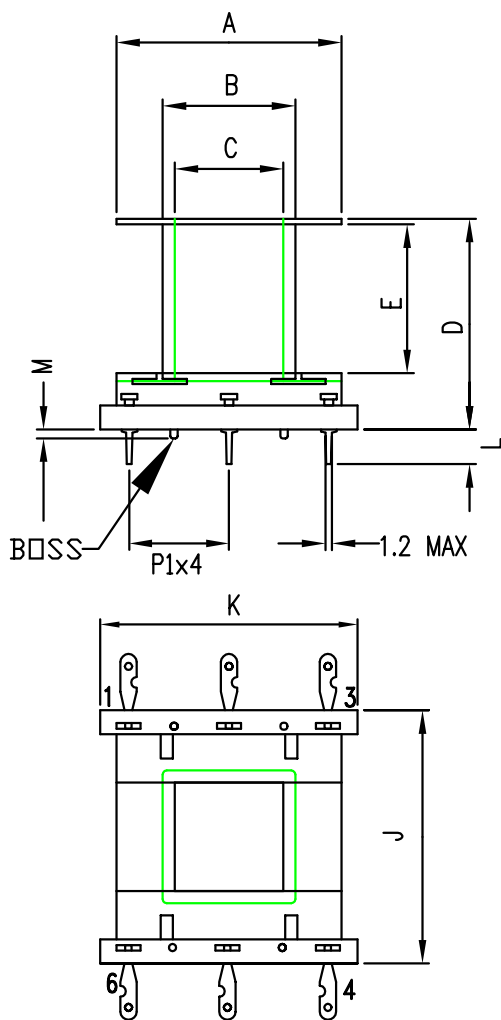

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.3	H ±0.2	I ±0.2	J ±0.2	K ±0.3	M ±0.2	L ±0.3	P1 ±0.2	P2 ±0.3	S1 ±0.2	S2 ±0.2	TYPE
EI 41-13.6-3-6PIN (0704101)	28.2	15.6	13.5	26.9	18.6	28.4	15.7	13.6	20.6	31.2	28.2	1.4	5.4	10.2	27.7	9.0	9.0	A
EI 41-13.6-3-6PIN (0704114)	28.2	15.6	13.5	26.9	18.6	28.5	15.7	13.6	20.6	31.2	28.2	/	5.4	10.2	27.7	9.0	9.0	A
EI 41-13.6-2-6PIN (0704102)	28.2	15.6	13.5	26.9	18.6	28.5	15.7	13.6	20.6	31.2	28.2	1.4	5.4	10.2	27.7	/	/	B
EI 41-13.6-2-6PIN (0704115)	28.2	15.6	13.5	26.9	18.6	28.4	15.7	13.6	20.6	31.2	28.2	/	5.4	10.2	27.7	/	/	B

DATE	REVISED STORY	MODEL : EI-41-13.6-3-6PIN (TPI NO.:0704101) EI-41-13.6-2-6PIN (TPI NO.:0704102) EI-41-13.6-3-6PIN (TPI NO.:0704114) EI-41-13.6-2-6PIN (TPI NO.:0704115)
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : Nylon 66/GF UL94HB ; PBT/GF UL94V-0 PIN MATERIAL : PHOSPHORUS BRONZE (TIN PLATED)
		DATE : June 01,2002 REV.: A TOLERANCE : .XXX±0.08 .XX ±0.1 .X ±0.2