

ULTRA FLEXIBLE INDUSTRY CABLE

自動化設備専用 柔軟耐油電纜線 **UL.PSE.CSA 認證**

スーパーソフト

105°C 600V 10AWG FT1 耐熱 耐油 耐屈 <PS>E JET 702
A/B 105°C 600V 10AWG FT1 耐熱 耐油 耐屈 <PS>E

披覆具備耐油特性

電纜額定耐溫 105°C

電纜額定電壓 600V/AC



TAYUKABEL®

耐油/耐熱/耐屈折 柔軟電纜線 エクストラフレキシブルケーブル

OIL-RESISTANCE / HEATING / FLEXIBLE CABLE



TAYU



TAYUKABEL®

PREMIUM OIL-RESISTANCE & FLEXIBLE CABLE

高品質柔軟耐油電纜 スーパーソフト

舞台燈光工程/流動演出指定用線



// TAYUKABEL®

TA YU



TAYUKABEL®

<PS>E VCT 耐油/耐熱/耐屈超軟電纜。線材絕緣與披覆使用環保材質,額定電壓 600V, 耐溫 105°C。普遍應用於自動化設備、耐彎曲佈線環境、機械手臂、舞台燈光工程等。

Oil-resistant/heat-resistant/bending-resistant super soft cable. Wire insulation and coating use environmentally friendly materials, rated voltage 600V, temperature resistance 105°C. It is widely used in automation equipment, bending-resistant wiring environment, robotic arm, stage lighting engineering, etc.

MAP® PREMIUM ULTRA FLEXIBLE CABLE 高品質超軟電纜


導體截面積	芯線數目	絞合結構	芯線內徑/MM	總完成外徑/MM	外被顏色
MM ²	NUMB OF CORE	MATERIAL.	INNER DIA.	OVERALL DIA	COLOR
0.3 mm ²	2C	12 / 0.18	1.5 mm	4.4 mm ± 5%	黑霧 100P
0.3 mm ²	3C	12 / 0.18	1.5 mm	4.6 mm ± 5%	黑霧 100P
0.3 mm ²	4C	12 / 0.18	1.5 mm	5.3 mm ± 5%	黑霧 100P
0.3 mm ²	5C	12 / 0.18	1.5 mm	5.7 mm ± 5%	黑霧 100P
0.3 mm ²	6C	12 / 0.18	1.5 mm	6.4 mm ± 5%	黑霧 100P
0.3 mm ²	7C	12 / 0.18	1.5 mm	6.4 mm ± 5%	黑霧 100P
0.3 mm ²	8C	12 / 0.18	1.5 mm	6.9 mm ± 5%	黑霧 100P
0.3 mm ²	10C	12 / 0.18	1.5 mm	8.6 mm ± 5%	黑霧 100P
0.3 mm ²	12C	12 / 0.18	1.5 mm	8.8 mm ± 5%	黑霧 100P
0.3 mm ²	14C	12 / 0.18	1.5 mm	9.3 mm ± 5%	黑霧 100P
0.3 mm ²	16C	12 / 0.18	1.5 mm	9.9 mm ± 5%	黑霧 100P
0.3 mm ²	20C	12 / 0.18	1.5 mm	11.1 mm ± 5%	黑霧 100P
0.3 mm ²	24C	12 / 0.18	1.5 mm	12.4 mm ± 5%	黑霧 100P
0.3 mm ²	30C	12 / 0.18	1.5 mm	13.1 mm ± 5%	黑霧 100P
0.3 mm ²	36C	12 / 0.18	1.5 mm	14.2 mm ± 5%	黑霧 100P
0.3 mm ²	40C	12 / 0.18	1.5 mm	14.7 mm ± 5%	黑霧 100P
0.3 mm ²	50C	12 / 0.18	1.5 mm	16.5 mm ± 5%	黑霧 100P




MAP® PREMIUM ULTRA FLEXIBLE CABLE 高品質超軟電纜

導體截面積	芯線數目	絞合結構	芯線內徑/MM	總完成外徑/MM	外被顏色
MM ²	NUMB OF CORE	MATERIAL.	INNER DIA.	OVERALL DIA	COLOR
0.5 mm ²	2C	20 / 0.18	1.8 mm	5.0 mm ± 5%	黑霧 100P
0.5 mm ²	3C	20 / 0.18	1.8 mm	5.3 mm ± 5%	黑霧 100P
0.5 mm ²	4C	20 / 0.18	1.8 mm	5.9 mm ± 5%	黑霧 100P
0.5 mm ²	5C	20 / 0.18	1.8 mm	6.5 mm ± 5%	黑霧 100P
0.5 mm ²	6C	20 / 0.18	1.8 mm	7.2 mm ± 5%	黑霧 100P
0.5 mm ²	7C	20 / 0.18	1.8 mm	7.2 mm ± 5%	黑霧 100P
0.5 mm ²	8C	20 / 0.18	1.8 mm	8.0 mm ± 5%	黑霧 100P
0.5 mm ²	10C	20 / 0.18	1.8 mm	9.4 mm ± 5%	黑霧 100P
0.5 mm ²	12C	20 / 0.18	1.8 mm	9.9 mm ± 5%	黑霧 100P
0.5 mm ²	14C	20 / 0.18	1.8 mm	10.3 mm ± 5%	黑霧 100P
0.5 mm ²	16C	20 / 0.18	1.8 mm	11.1 mm ± 5%	黑霧 100P
0.5 mm ²	20C	20 / 0.18	1.8 mm	12.3 mm ± 5%	黑霧 100P
0.5 mm ²	24C	20 / 0.18	1.8 mm	13.6 mm ± 5%	黑霧 100P
0.5 mm ²	30C	20 / 0.18	1.8 mm	14.5 mm ± 5%	黑霧 100P
0.5 mm ²	36C	20 / 0.18	1.8 mm	15.6 mm ± 5%	黑霧 100P
0.5 mm ²	40C	20 / 0.18	1.8 mm	16.1 mm ± 5%	黑霧 100P
0.5 mm ²	50C	20 / 0.18	1.8 mm	18.1 mm ± 5%	黑霧 100P


4 C



7 C




8 C





MAP® PREMIUM ULTRA FLEXIBLE CABLE 高品質超軟電纜

導體截面積	芯線數目	絞合結構	芯線內徑/MM	總完成外徑/MM	外被顏色
MM ²	NUMB OF CORE	MATERIAL.	INNER DIA.	OVERALL DIA	COLOR
0.75 mm ²	2C	30 / 0.18	2.3 mm	6.2 mm ± 5%	黑霧 100P
0.75 mm ²	3C	30 / 0.18	2.3 mm	6.6 mm ± 5%	黑霧 100P
0.75 mm ²	4C	30 / 0.18	2.3 mm	7.2 mm ± 5%	黑霧 100P
0.75 mm ²	5C	30 / 0.18	2.3 mm	8.2 mm ± 5%	黑霧 100P
0.75 mm ²	6C	30 / 0.18	2.3 mm	9.1 mm ± 5%	黑霧 100P
0.75 mm ²	7C	30 / 0.18	2.3 mm	9.1 mm ± 5%	黑霧 100P
0.75 mm ²	8C	30 / 0.18	2.3 mm	10.0 mm ± 5%	黑霧 100P
0.75 mm ²	10C	30 / 0.18	2.3 mm	11.8 mm ± 5%	黑霧 100P
0.75 mm ²	12C	30 / 0.18	2.3 mm	12.4 mm ± 5%	黑霧 100P
0.75 mm ²	14C	30 / 0.18	2.3 mm	13.0 mm ± 5%	黑霧 100P
0.75 mm ²	16C	30 / 0.18	2.3 mm	13.8 mm ± 5%	黑霧 100P
0.75 mm ²	20C	30 / 0.18	2.3 mm	15.2 mm ± 5%	黑霧 100P
0.75 mm ²	24C	30 / 0.18	2.3 mm	16.8 mm ± 5%	黑霧 100P
0.75 mm ²	30C	30 / 0.18	2.3 mm	17.8 mm ± 5%	黑霧 100P
0.75 mm ²	36C	30 / 0.18	2.3 mm	19.3 mm ± 5%	黑霧 100P
0.75 mm ²	40C	30 / 0.18	2.3 mm	20.2 mm ± 5%	黑霧 100P
0.75 mm ²	50C	30 / 0.18	2.3 mm	23.4 mm ± 5%	黑霧 100P

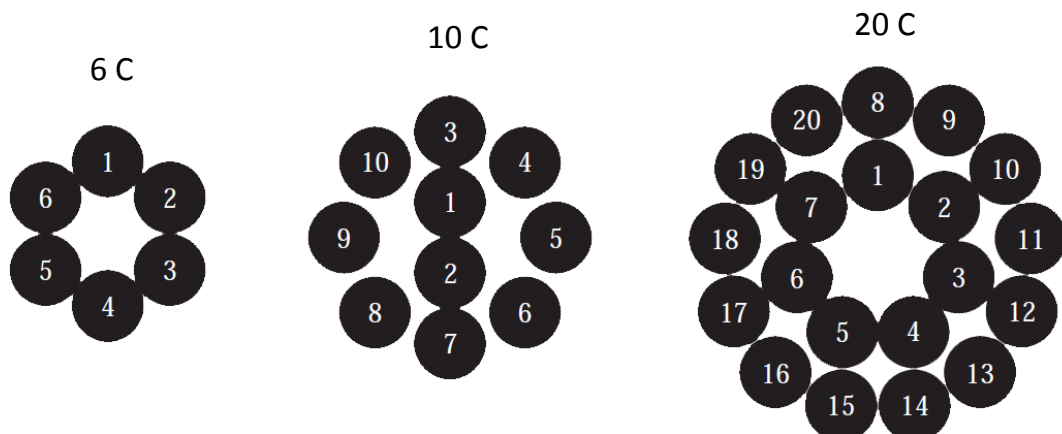





MAP® PREMIUM ULTRA FLEXIBLE CABLE 高品質超軟電纜


導體截面積	芯線數目	絞合結構	芯線內徑/MM	總完成外徑/MM	外被顏色
MM ²	NUMB OF CORE	MATERIAL.	INNER DIA.	OVERALL DIA	COLOR
1.25 mm ²	2C	50 / 0.18	2.5 mm	6.6 mm ± 5%	黑霧 100P
1.25 mm ²	3C	50 / 0.18	2.5 mm	7.0 mm ± 5%	黑霧 100P
1.25 mm ²	4C	50 / 0.18	2.5 mm	7.8 mm ± 5%	黑霧 100P
1.25 mm ²	5C	50 / 0.18	2.5 mm	8.8 mm ± 5%	黑霧 100P
1.25 mm ²	6C	50 / 0.18	2.5 mm	9.7 mm ± 5%	黑霧 100P
1.25 mm ²	7C	50 / 0.18	2.5 mm	9.7 mm ± 5%	黑霧 100P
1.25 mm ²	8C	50 / 0.18	2.5 mm	10.7 mm ± 5%	黑霧 100P
1.25 mm ²	10C	50 / 0.18	2.5 mm	12.5 mm ± 5%	黑霧 100P
1.25 mm ²	12C	50 / 0.18	2.5 mm	13.2 mm ± 5%	黑霧 100P
1.25 mm ²	14C	50 / 0.18	2.5 mm	14.0 mm ± 5%	黑霧 100P
1.25 mm ²	16C	50 / 0.18	2.5 mm	14.8 mm ± 5%	黑霧 100P
1.25 mm ²	20C	50 / 0.18	2.5 mm	16.3 mm ± 5%	黑霧 100P
1.25 mm ²	24C	50 / 0.18	2.5 mm	18.0 mm ± 5%	黑霧 100P
1.25 mm ²	30C	50 / 0.18	2.5 mm	19.2 mm ± 5%	黑霧 100P
1.25 mm ²	36C	50 / 0.18	2.5 mm	21.1 mm ± 5%	黑霧 100P
1.25 mm ²	40C	50 / 0.18	2.5 mm	21.9 mm ± 5%	黑霧 100P
1.25 mm ²	50C	50 / 0.18	2.5 mm	25.2 mm ± 5%	黑霧 100P

10 C



20 C

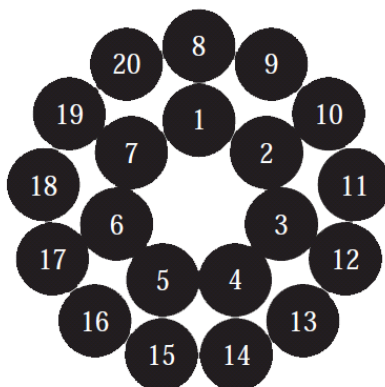

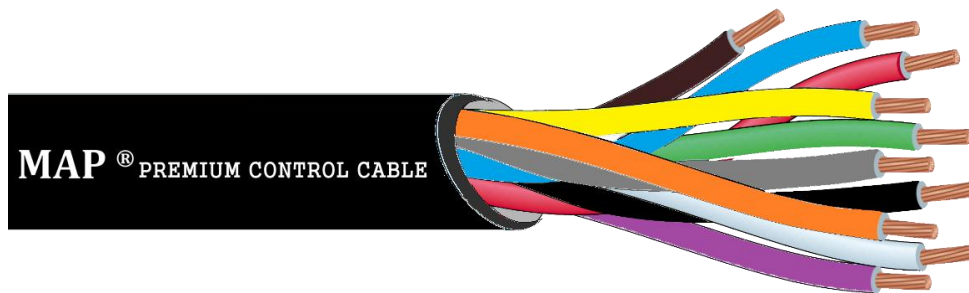

MAP® PREMIUM ULTRA FLEXIBLE CABLE 高品質超軟電纜

導體截面積	芯線數目	絞合結構	芯線內徑/MM	總完成外徑/MM	外被顏色
MM ²	NUMB OF CORE	MATERIAL.	INNER DIA.	OVERALL DIA	COLOR
2.0 mm ²	2C	37 / 0.26	3.0 mm	7.7 mm ± 5%	黑霧 100P
2.0 mm ²	3C	37 / 0.26	3.0 mm	9.0 mm ± 5%	黑霧 100P
2.0 mm ²	4C	37 / 0.26	3.0 mm	10.0 mm ± 5%	黑霧 100P
2.0 mm ²	5C	37 / 0.26	3.0 mm	10.7 mm ± 5%	黑霧 100P
2.0 mm ²	6C	37 / 0.26	3.0 mm	11.8 mm ± 5%	黑霧 100P
2.0 mm ²	7C	37 / 0.26	3.0 mm	11.8 mm ± 5%	黑霧 100P
2.0 mm ²	8C	37 / 0.26	3.0 mm	12.7 mm ± 5%	黑霧 100P
2.0 mm ²	10C	37 / 0.26	3.0 mm	14.5 mm ± 5%	黑霧 100P
2.0 mm ²	12C	37 / 0.26	3.0 mm	15.5 mm ± 5%	黑霧 100P
2.0 mm ²	14C	37 / 0.26	3.0 mm	16.3 mm ± 5%	黑霧 100P
2.0 mm ²	16C	37 / 0.26	3.0 mm	17.1 mm ± 5%	黑霧 100P
2.0 mm ²	20C	37 / 0.26	3.0 mm	19.1 mm ± 5%	黑霧 100P
2.0 mm ²	24C	37 / 0.26	3.0 mm	21.6 mm ± 5%	黑霧 100P
2.0 mm ²	30C	37 / 0.26	3.0 mm	23.2 mm ± 5%	黑霧 100P
2.0 mm ²	36C	37 / 0.26	3.0 mm	25.2 mm ± 5%	黑霧 100P
2.0 mm ²	40C	37 / 0.26	3.0 mm	26.3 mm ± 5%	黑霧 100P
2.0 mm ²	50C	37 / 0.26	3.0 mm	28.5 mm ± 5%	黑霧 100P

2C



3C



4C



MAP® PREMIUM ULTRA FLEXIBLE CABLE 高品質超軟電纜

導體截面積	芯線數目	絞合結構	芯線內徑/MM	總完成外徑/MM	外被顏色
MM ²	NUMB OF CORE	MATERIAL.	INNER DIA.	OVERALL DIA	COLOR
3.5 mm ²	2C	65 / 0.26	4.0 mm	10.8 mm ± 5%	黑霧 100P
3.5 mm ²	3C	65 / 0.26	4.0 mm	11.4 mm ± 5%	黑霧 100P
3.5 mm ²	4C	65 / 0.26	4.0 mm	12.7 mm ± 5%	黑霧 100P
3.5 mm ²	5C	65 / 0.26	4.0 mm	14.1 mm ± 5%	黑霧 100P
3.5 mm ²	6C	65 / 0.26	4.0 mm	15.3 mm ± 5%	黑霧 100P
3.5 mm ²	7 C	65 / 0.26	4.0 mm	15.3 mm ± 5%	黑霧 100P
3.5 mm ²	8 C	65 / 0.26	4.0 mm	16.6 mm ± 5%	黑霧 100P
3.5 mm ²	10 C	65 / 0.26	4.0 mm	19.6 mm ± 5%	黑霧 100P
3.5 mm ²	12 C	65 / 0.26	4.0 mm	20.4 mm ± 5%	黑霧 100P
3.5 mm ²	14 C	65 / 0.26	4.0 mm	21.7 mm ± 5%	黑霧 100P
3.5 mm ²	16 C	65 / 0.26	4.0 mm	23.1 mm ± 5%	黑霧 100P
3.5 mm ²	20 C	65 / 0.26	4.0 mm	26.2 mm ± 5%	黑霧 100P

MAP® PREMIUM ULTRA FLEXIBLE CABLE 高品質超軟電纜

導體截面積	芯線數目	絞合結構	芯線內徑/MM	總完成外徑/MM	外被顏色
MM ²	NUMB OF CORE	MATERIAL.	INNER DIA.	OVERALL DIA	COLOR
5.5 mm ²	2C	105 / 0.26	5.0 mm	13.4 mm ± 5%	黑霧 100P
5.5 mm ²	3C	105 / 0.26	5.0 mm	14.2 mm ± 5%	黑霧 100P
5.5 mm ²	4C	105 / 0.26	5.0 mm	15.6 mm ± 5%	黑霧 100P
5.5 mm ²	5C	105 / 0.26	5.0 mm	17.0 mm ± 5%	黑霧 100P
5.5 mm ²	6 C	105 / 0.26	5.0 mm	18.8 mm ± 5%	黑霧 100P
5.5 mm ²	7 C	105 / 0.26	5.0 mm	18.8 mm ± 5%	黑霧 100P
5.5 mm ²	8 C	105 / 0.26	5.0 mm	20.6 mm ± 5%	黑霧 100P
5.5 mm ²	10 C	105 / 0.26	5.0 mm	25.0 mm ± 5%	黑霧 100P
5.5 mm ²	12 C	105 / 0.26	5.0 mm	26.0 mm ± 5%	黑霧 100P
5.5 mm ²	14 C	105 / 0.26	5.0 mm	27.6 mm ± 5%	黑霧 100P
5.5 mm ²	16 C	105 / 0.26	5.0 mm	29.2 mm ± 5%	黑霧 100P
5.5 mm ²	20 C	105 / 0.26	5.0 mm	33.0 mm ± 5%	黑霧 100P
5.5 mm ²	24 C	105 / 0.26	5.0 mm	37.4 mm ± 5%	黑霧 100P
5.5 mm ²	30 C	105 / 0.26	5.0 mm	39.8 mm ± 5%	黑霧 100P

MAP® PREMIUM ULTRA FLEXIBLE CABLE 高品質超軟電纜

導體截面積	芯線數目	絞合結構	芯線內徑/MM	總完成外徑/MM	外被顏色
MM ²	NUMB OF CORE	MATERIAL.	INNER DIA.	OVERALL DIA	COLOR
8.0 mm ²	3C	148 / 0.26	6.2 mm	16.5 mm ± 5%	黑霧 100P
8.0 mm ²	4C	148 / 0.26	6.2 mm	18.0 mm ± 5%	黑霧 100P

MAP® PREMIUM ULTRA FLEXIBLE CABLE 高品質超軟電纜

導體截面積	芯線數目	絞合結構	芯線內徑/MM	總完成外徑/MM	外被顏色
MM ²	NUMB OF CORE	MATERIAL.	INNER DIA.	OVERALL DIA	COLOR
14.0 mm ²	3C	258 / 0.26	7.6 mm	20.0 mm ± 5%	黑霧 100P
14.0 mm ²	4C	258 / 0.26	7.6 mm	23.0 mm ± 5%	黑霧 100P

MAP® PREMIUM ULTRA FLEXIBLE CABLE 高品質超軟電纜

導體截面積	芯線數目	絞合結構	芯線內徑/MM	總完成外徑/MM	外被顏色
MM ²	NUMB OF CORE	MATERIAL.	INNER DIA.	OVERALL DIA	COLOR
22.0 mm ²	3C	427 / 0.26	9.2 mm	24.0 mm ± 5%	黑霧 100P
22.0 mm ²	4C	427 / 0.26	9.2 mm	27.0 mm ± 5%	黑霧 100P