


FLAT RIBBON CABLE 雙併電子線 UL2468 80°C 300V

導體材質: Tinned Copper 鍍錫退火軟銅線

絕緣材質: PVC Insulation 聚氯乙烯絕緣

顏色: 紅併黑、白併白(印黑點)、黑併黑(印白點)

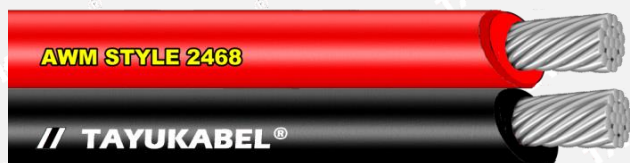

	線徑 AWG	導體結構	芯數 No. C	總完成外徑 Ø	導體電阻
UL2468 80°C 300V CABLE FLAME VW-1	28AWG	0.127mm / 7	2C	1.10 mm x 2.20 mm	248 ohm/KM
			3C	1.10 mm x 3.30 mm	
			4C	1.10 mm x 4.40 mm	
	26AWG	0.16mm / 7	2C	1.30 mm x 2.60 mm	152 ohm/KM
			3C	1.30 mm x 3.90 mm	
			4C	1.30 mm x 5.20 mm	
	24AWG	0.20mm / 7	2C	1.45 mm x 2.90 mm	88.6 ohm/KM
			3C	1.45 mm x 4.35 mm	
			4C	1.45 mm x 5.080 mm	
	22AWG	0.16mm / 17	2C	1.60 mm x 3.20 mm	62.5 ohm/KM
			3C	1.60 mm x 4.80 mm	
			4C	1.60 mm x 5.60 mm	
	20AWG	0.18mm / 21	2C	1.85 mm x 3.70 mm	39.5 ohm/KM
			3C	1.85 mm x 5.55 mm	
	18AWG	0.18mm / 34	2C	2.10 mm x 4.20 mm	24.4 ohm/KM
			3C	2.10 mm x 6.30 mm	