



NYLON-INSULATED TWIN CORD END TERMINALS (TE SERIES)


MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14	12	10	8	6
AMP.	9	12	17	18	30	35	50	70	95

MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.

CONNECTOR MATE RIAL : COPPER TUBE.

INSULATION MATE RIAL : NYLON

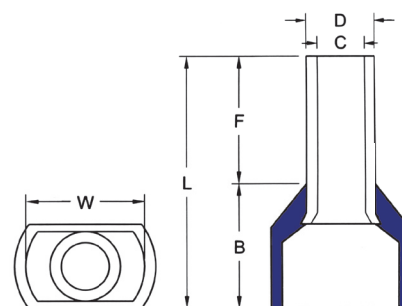

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION inch mm						FRENCH COLOR	GERMAN COLOR	DIN COLOR	CRIMPING TOOL
		F	L	W	B	D	C				
2X22 A.W.G. 2X0.5 mm ²	TE 0508	.315 8.0	.517 14.5	.197 5.0	.256 6.5	.071 1.8	.059 1.5	WHITE ○	ORANGE ●	WHITE ○	
2X20 A.W.G. 2X0.75 mm ²	TE 7508	.315 8.0	.579 14.7	.217 5.5	.264 6.7	.083 2.1	.071 1.8	BLUE ●	WHITE ○	GREY ●	
	TE 7510	.394 10.0	.657 16.7								
2X18 A.W.G. 2X1.0 mm ²	TE 1008	.315 8.0	.594 15.1	.217 5.5	.280 7.1	.094 2.4	.083 2.1	RED ●	YELLOW ●	RED ●	
	TE 1010	.394 10.0	.673 17.1								
2X16 A.W.G. 2X1.5 mm ²	TE 1508	.315 8.0	.610 15.5	.252 6.4	.295 7.5	.102 2.6	.091 2.3	BLACK ●	RED ●	BLACK ●	
	TE 1512	.472 12.0	.788 19.5								
2X14 A.W.G. 2X2.5 mm ²	TE 2510	.394 10.0	.728 18.5	.315 8.0	.235 8.5	.130 3.3	.114 2.9	GREY ●	BLUE ●	BLUE ●	
	TE 2513	.512 13.0	.846 21.5								
2X12 A.W.G. 2X4 mm ²	TE 4012	.472 12.0	.909 23.1	.346 8.8	.437 11.1	.165 4.2	.150 3.8	ORANGE ●	GREY ●	GREY ●	
2X10 A.W.G. 2X6 mm ²	TE 6014	.551 14.0	1.028 26.1	.374 9.5	.476 12.1	.209 5.3	.193 4.9	GREEN ●	BLACK ●	YELLOW ●	
2X8 A.W.G. 2X10 mm ²	TE 10-14	.551 14.0	1.047 26.6	.496 12.6	.496 12.6	.272 6.9	.256 6.5	BROWN ●	IVORY ○	RED ●	
2X6 A.W.G. 2X16 mm ²	TE 16-14	.551 14.0	1.232 31.3	.748 19.0	.681 17.3	.343 8.7	.327 8.3	IVORY ○	GREEN ●	BLUE ●	