


TURCK

智動化 工程類 近接傳感器

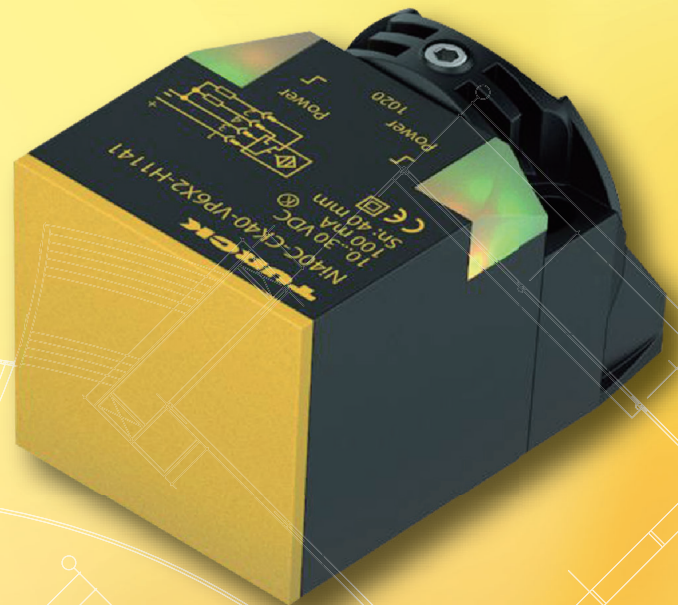

CK40

Bi30U-CK40-XXXX

Ni50U-CK40-XXXX

物流輸送帶


工程機具類

金屬製造業

鋼鐵製造業


挖機車製造業

無衰減型近接傳感器

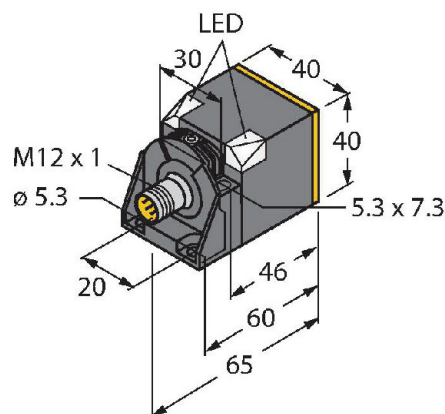

Technical data

Type	Bi30U-CK40-AP6X2-H1141 (PNP)	Ni50U-CK40-VP6X2-H1141 (PNP)
Type	Bi30U-CK40-AN6X2-H1141 (NPN)	Ni50U-CK40-VN6X2-H1141 (NPN.)
Rated switching distance	(flush) max 30mm	(non flush) max 50mm
Operating voltage	10...30 VDC	10...65 VDC
Switching frequency	0.25 kHz	0.25 kHz
Output function	3-wire, NO contact, PNP or NPN type	4-wire, N.O.+N.C., PNP or NPN type
Short-circuit protection	yes / Cyclic	yes / Cyclic
Electrical connection	connector, M12x1	connector, M12x1
Protection class	IP67	IP67
LED	Power-on /2X LED Green Switching state / 2X LED, Yellow	

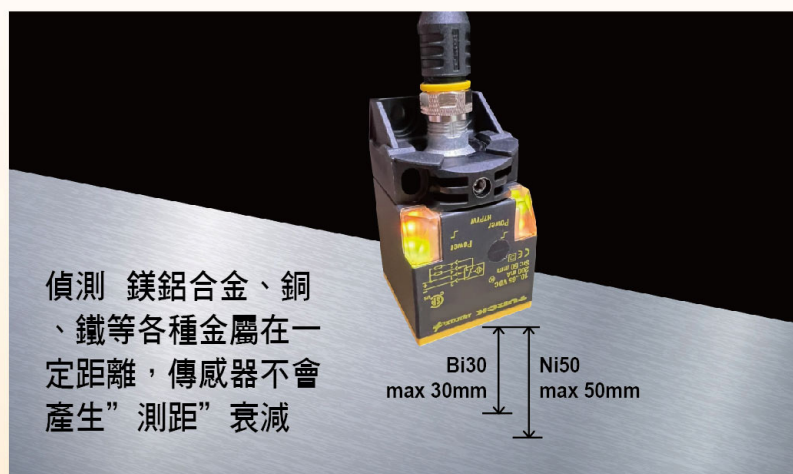

www.e-sensors.com.tw

台灣傳感科技有限公司

TEL:+886-7-7323606

FAX:+886-7-7333023

E-mail: ez-corp@umail.hinet.net

3 CK40 Inductive Sensor with Analog output



TURCK

Ni25-CK40-XXXX

水業機械業 工程機具類
金屬/鋼鐵/塑膠製造業
汽機車自行車製造業



類比輸出型
近接傳感器

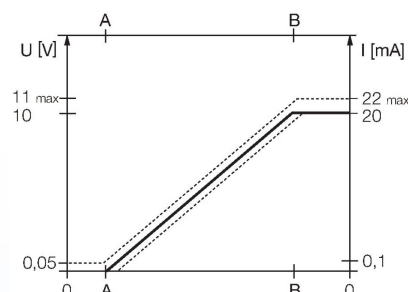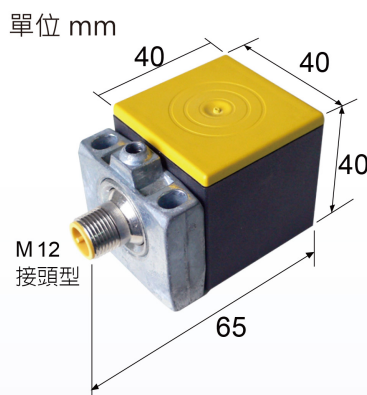


Technical data

Type	Ni25-CK40-LIU-H1141
Rated switching distance	(non flush) 5...25mm
Operating voltage	10...30 VDC
Measuring frequency	30 Hz
Output function	4-wire, Analog output
Short-circuit protection	yes / Cyclic
Output	0...10V / 0...20mA
Protection class	IP67
LED	NO



Connectivity PUR cable



例：M12-4pin

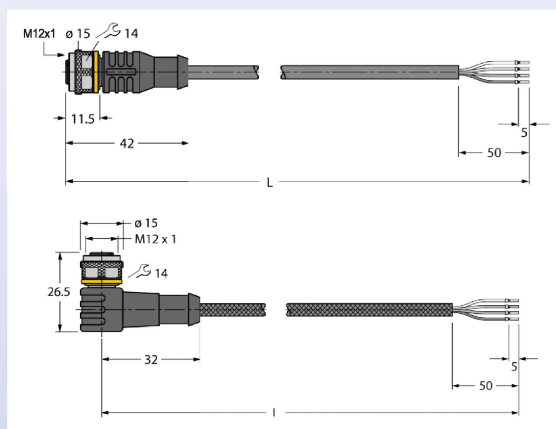

Cable [m]	ID number	PUR Cable
2m	6625503	RKC4.4T-2/TXL
5m	6625504	RKC4.4T-5/TXL
10m	6625505	RKC4.4T-10/TXL
2m	6625515	WKC4.4T-2/TXL
5m	6625516	WKC4.4T-5/TXL
10m	6625517	WKC4.4T-10/TXL

more...

Wiring diagram

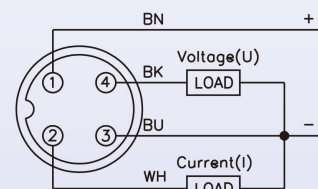

www.e-sensors.com.tw

台灣傳威科技有限公司

TEL:+886-7-7323606

FAX:+886-7-7333023

E-mail: ez-corp@umail.hinet.net