

**PERMANENT ANTI-STATIC
PVC FLOOR**



VERO FLOOR

VERO FLOOR


Anti-static PVC floor



● PVC welding rod

- 1 
- 2 
- 3 
- 4 
- 5 
- 6 
- 7 
- 8 
- 9 
- 10 

● Copper tape



HY-503

Excellence of product

Excellence wear resistance and easy cleaning with special coating.

Conductive material is distributed evenly in the entire area to have permanent conductivity.


Anti-fire, anti-chemical properties.

Uniform gauge and color maintenance.

VERO FLOOR

Copper tape

Electroconductive
adhesive

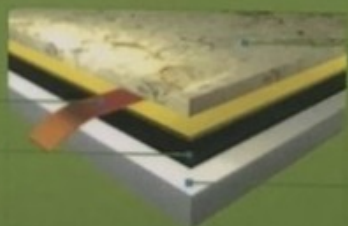


PVC surface


Concrete

VERO FLOOR

Anti-static PVC floor

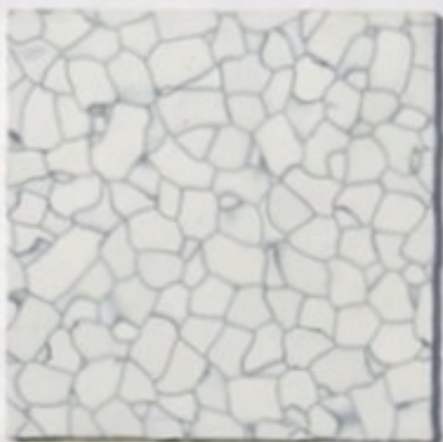


HY-501

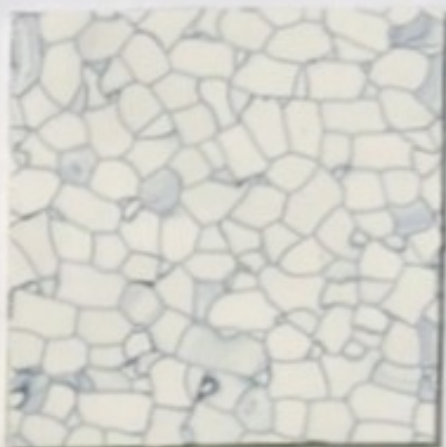

HY-503



HY-603

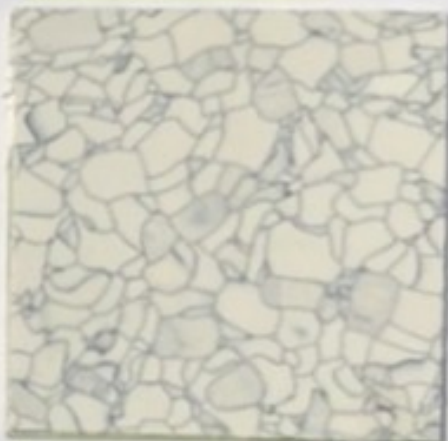

VERO-601



Uses of product

Electric Factory

Clean Room

Areas Of Anti-Static

Computer Room

Telephone Room

VERO FLOOR

Introduction of construction

This product has permanent anti-static function because it uses conductive static network formed at the interface of plastic particles.

	ITEM	STANDARD	INDEX
	SIZE	SJ/T11236-2001	600*600mm 900*900mm
	THICKNESS	SJ/T11236-2001	2.0, 2.5, 3.0 mm
	ELECTRICAL RESISTANCE	SJ/T11236-2001	EC $2.5 \times 10^4 - 1.0 \times 10^6$ SD $1.0 \times 10^5 - 10^9$
	STATING VOLTAGE	SJ/T11236-2001	IVI < 100V
	STATIC DECAY	GJB2605-1996	≤ 2 Sec
	RESISTANCE TO WEAR	SJ/T11236-2001	$\leq 0.020 \text{g/cm}^2$
	FIRE RESISTANCE	SJ/T11236-2001	FV-0
	DIMENSIONAL	STABILITY En434	$\geq 0.10\%$
	RATE OF DAMNIFY HEATING	SJ/T11236-2001	$\leq 0.50\%$
	RATE OF CHANGING HEATING	SJ/T11236-2001	$\geq 0.20\%$
	RATE OF CHANGING WATERING	GB4085-83	$\leq 0.15\%$
	RESIDUAL CONCAVITY	SJ/T11236-2001	≤ 0.15
	CONCAVITY 23℃ 45℃	SJ/T11236-2001	≤ 0.30 ≤ 0.60
	COLOR FASTNESS	ISO 105B 02	≤ 6

VERO VERIA CORPORATION

ADD/105, SEC.4 SAN HO ROAD, SANCHUNG DISTRICT, NEW TAIPEI CITY, TAIWAN
 TEL/886-2-22874111 886-2-22872222
 FAX/886-2-22863484 886-2-22864597
 E-Mail/vero.taipei@msa.hinet.net

VERO TECHNOLOGIES(SUZHOU)CO.,LTD.

ADD/NO.988 KANGYUAN ROAD XIANGCHEN AREA SUZHOU CITY, JIANGSU, CHINA
 TEL/(86-512)65765929 (86-512)65750580
 FAX/(86-512)65750623 (86-512)65780190
 E-Mail/vero-sz@126.com