

SOLON




Since 1992

Fan accessories 風扇配件



ISO 9001:2000

Made In Taiwan

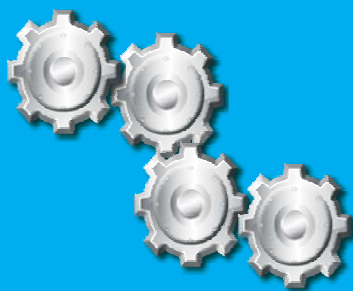

SOLON Enterprise Co., Ltd.

洋健企業股份有限公司



www.solon.com.tw

Copyright© SOLON Enterprise Co., Ltd. all rights reserved

電源線 AC Fan power cord



Wire Type:
SPT-1 18AWG/2C
SPT-2 18AWG/2C

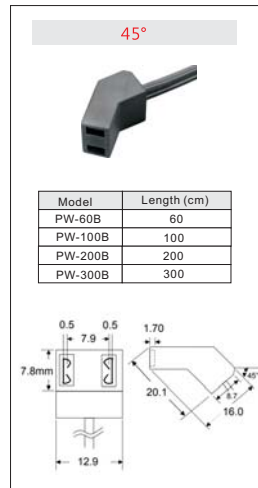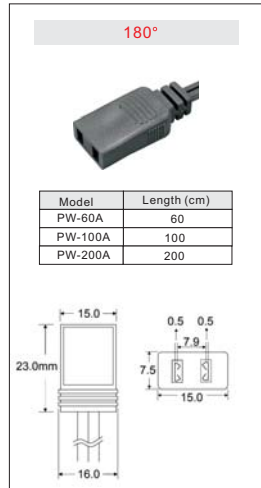

圓形百葉 Circle Louvered Filter




SR-120

適用風扇
Apply to 9 cm(3.5") fan

SR-100

適用風扇
Apply to 8 cm(3") fan

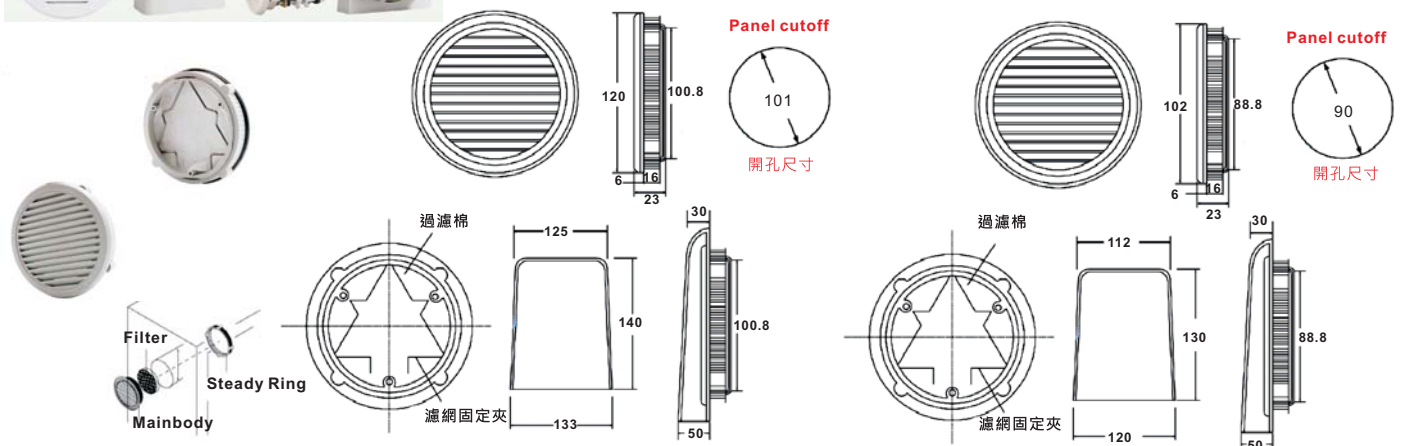


2.5"

適用風扇
Apply to fan
60x60x10 mm
60x60x15 mm
60x60x20 mm
60x60x25 mm
60x60x30 mm




FA-60D

單片濾網 Plastic Guard

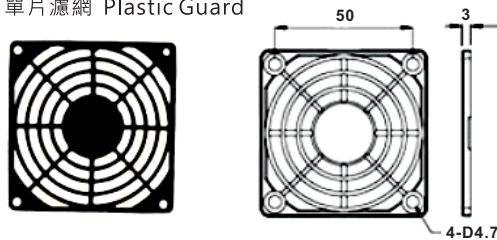

3合1濾網 Three-in-one Filter


FA-60

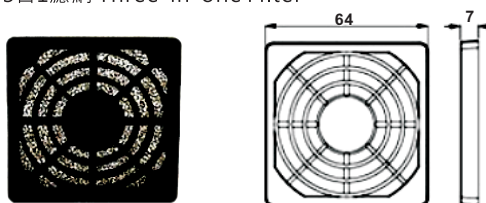

Model	Color of Cover (外觀顏色)	Inner filter (濾材)
FA-60	Black (黑)	Foam (泡棉)

Fan Guard 風扇鐵網

SP-60

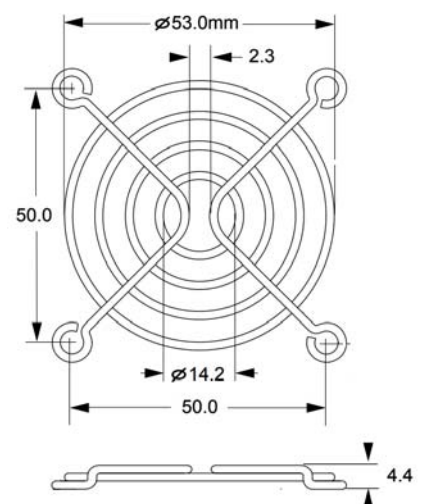

Filet body: ABS resin UL 94-HB
Pressing damages strainer:
Initial at 6.9mm A.Q.
Final stage at 24mm A.Q.
Maximum wind speed: 2 M/sec
Ambient temperature: -10~+85°C
Dust remove rate: 56~89%
Protection grade: IP-40

3"

適用風扇
Apply to fan


80x80x15 mm
80x80x20 mm
80x80x25 mm
80x80x38 mm



Filet body: ABS resin UL 94-HB
Pressing damages strainer:
Initial at 6.9mm A.Q.
Final stage at 24mm A.Q.
Maximum wind speed: 2 M/sec
Ambient temperature: -10~+55°C
Effective wind speed: 50 m3/min
Dust remove rate: 56~89%
Protection grade: IP-40


單片濾網 Plastic Guard

FA-80D



3合1濾網 Three-in-one Filter


FA-80



Model	Color of Cover (外殼顏色)	Inner filter (濾材)
FA-80	Black (黑)	Foam (泡棉)
FA-80A	Black (黑)	Non-woven (不織布)
FA-80B	White (白)	Non-woven (不織布)
BU-80	-	Foam (泡棉)
BU-80A	-	Non-woven (不織布)

Fan Guard 風扇鐵網

SP-80

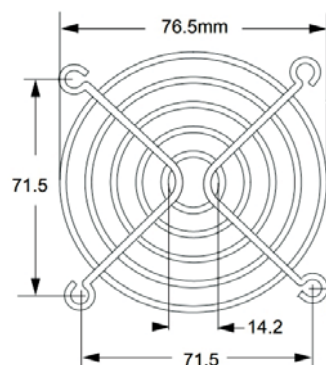


百葉濾網 Louvered Filter




機箱由外往內鎖
Filter screwed from cabinet outside

SA-03



Panel cutoff 開孔尺寸



Installation 開孔尺寸(mm): 81x81
Max. wind speed 最大風速: 2.5m /second
Collection coefficient 集塵效率: 70%
Temperature range 使用溫度: -10 °C ~ +85°C
Material 材質: ABS resin
Protection grade 防護等級: IP-54
For fan size 適合風扇尺寸 (mm): 80x80

3.5"

適用風扇
Apply to fan


92x92x25 mm
92x92x38 mm



Filet body: ABS resin UL 94-HB
Pressing damages strainer:
Initial at 6.9mm A.Q.
Final stage at 24mm A.Q.
Maximum wind speed: 2.5M/sec
Ambient temperature: -10~+85°C
Effective wind speed: 50 m3/min
Dust remove rate: 56~89%
Protection grade: IP-40


單片濾網 Plastic Guard

FA-92D



3合1濾網 Three-in-one Filter


FA-92



Model	Color of Cover (外殼顏色)	Inner filter (濾材)
FA-92	Black (黑)	Foam (泡棉)
FA-92A	Black (黑)	Non-woven (不織布)
FA-92B	White (白)	Non-woven (不織布)
BU-92	-	Foam (泡棉)
BU-92A	-	Non-woven (不織布)

Fan Guard 風扇鐵網

SP-92

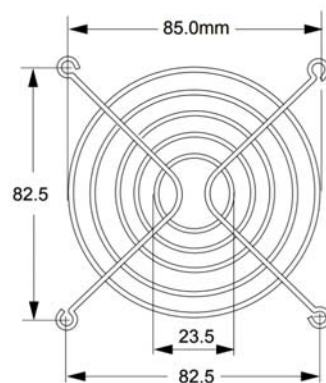


百葉濾網 Louvered Filter




機箱由外往內鎖
Filter screwed from cabinet outside

SA-03A



Panel cutoff 開孔尺寸



Installation 開孔尺寸(mm): 91x91
Max. wind speed 最大風速: 2.5m /second
Collection coefficient 集塵效率: 70%
Temperature range 使用溫度: -10 °C ~ +85°C
Material 材質: ABS resin
Protection grade 防護等級: IP-54
For fan size 適合風扇尺寸 (mm): 92x92

Inner Mat 濾棉: BU-92B

4"

適用風扇

Apply to fan


120x120x25 mm
120x120x38 mm



Filet body: ABS resin UL 94-HB
Pressing damages strainer:
Initial at 6.9mm A.Q.
Final stage at 24mm A.Q.
Maximum wind speed: 2 M/sec
Ambient temperature: -10~+55°C
Effective wind speed: 50 m3/min
Dust remove rate: 56~89%
Protection grade: IP-40


單片濾網 Plastic Guard

FA-120D

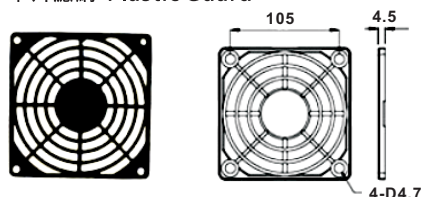

3合1濾網 Three-in-one Filter


FA-120

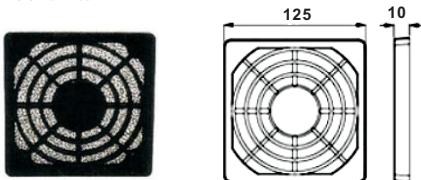

Model	Color of Cover (外殼顏色)	Inner filter (濾材)
FA-120	Black (黑)	Foam (泡棉)
FA-120A	Black (黑)	Non-woven (不織布)
FA-120B	White (白)	Non-woven (不織布)
BU-120	-	Foam (泡棉)
BU-120A	-	Non-woven (不織布)

Fan Guard 風扇鐵網

SP-120

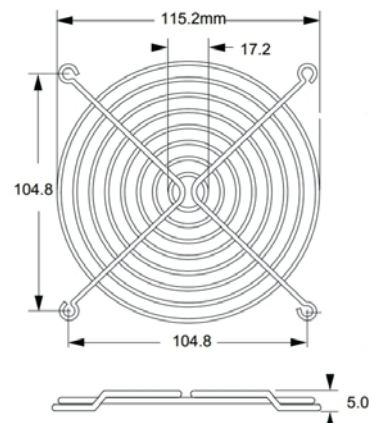


百葉濾網 Louvered Filter



機箱內往外安裝

SA-04

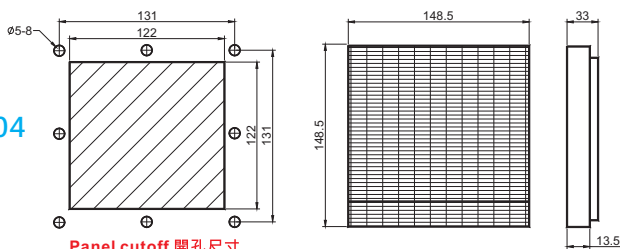


Panel cutoff 開孔尺寸

SA-04B



機箱外往外安裝

SU-04

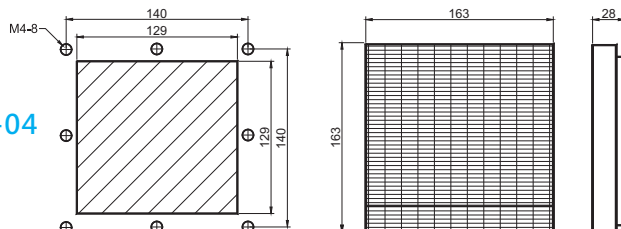


Panel cutoff 開孔尺寸

滑蓋百葉濾網 Sliding Louvered Filter



機箱外往外安裝

MU-04

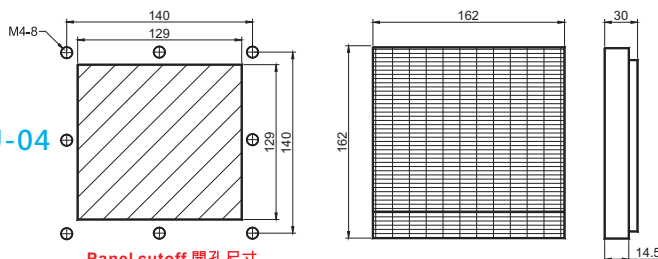

Panel cutoff 開孔尺寸

Max. wind speed 最大風速: 2.5m /second
Collection coefficient 集塵效率: 80%
Temperature range 使用溫度: -10℃ ~ +85℃
Material 材質: ABS resin
Protection grade 防護等級: IP-54
For fan size 適合風扇尺寸 (mm): 120x120


Inner Mat 濾棉: BU-120B

上掀百葉濾網 Top open Louvered Filter



機箱由外往外鎖
Filter screwed from cabinet outside

TA-04

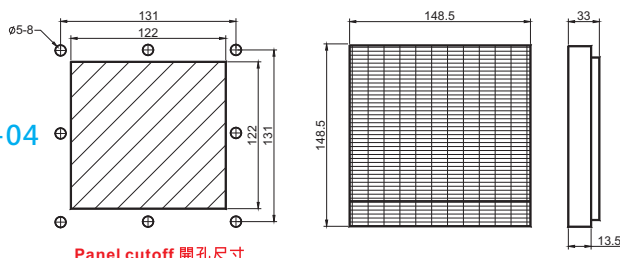

Panel cutoff 開孔尺寸

6"

適用風扇

Apply to fan


172x150x38 mm
172x150x51 mm



Filet body: ABS resin UL 94-HB
Pressing damages strainer:
Initial at 6.9mm A.Q.
Final stage at 24mm A.Q.
Maximum wind speed: 2 M/sec
Ambient temperature : -10~+55°C
Effective wind speed: 50 m3/min
Dust remove rate: 56~89%
Protection grade: IP-40


單片濾網 Plastic Guard

FA-172D

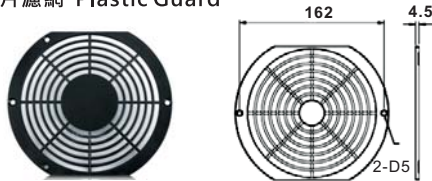

3合1濾網 Three-in-one Filter


FA-172

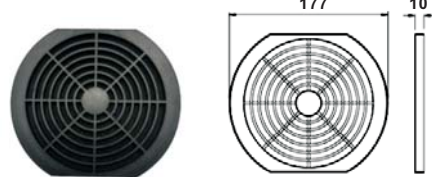

Model	Color of Cover (外殼顏色)	Inner filter (濾材)
FA-172	Black (黑)	Foam (泡棉)
FA-172A	Black (黑)	Non-woven (不織布)
FA-172B	White (白)	Non-woven (不織布)
BU-172	-	Foam (泡棉)
BU-172A	-	Non-woven (不織布)

Fan Guard 風扇鐵網

SP-172

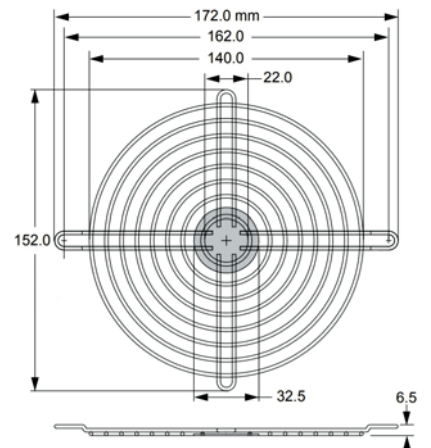

百葉濾網 Louvered Filter




機箱由內往外鎖
Filter screwed from cabinet inside




機箱由外往內鎖
Filter screwed from cabinet outside

SA-06

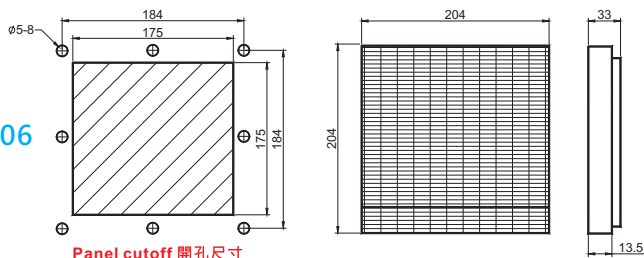

Panel cutoff 開孔尺寸

SU-06

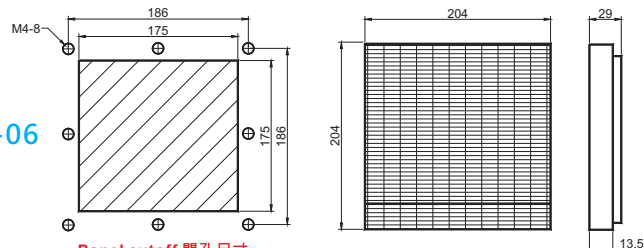

Panel cutoff 開孔尺寸

SA-06B




滑蓋百葉濾網 Sliding Louvered Filter



機箱由外往內鎖
Filter screwed from cabinet outside

MU-06

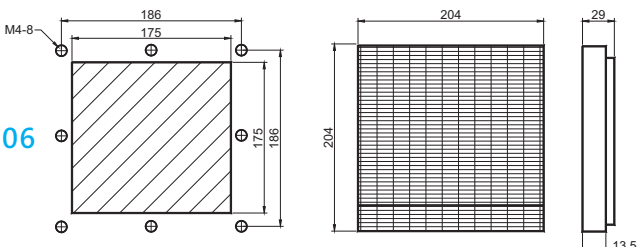

Panel cutoff 開孔尺寸


Max. wind speed 最大風速: 2.5m /second
Collection coefficient 集塵效率: 80%
Temperature range 使用溫度: -10 °C ~ +85°C
Material 材質: ABS resin
Protection grade 防護等級: IP-54
For fan size 適合風扇尺寸 (mm): 120x120, 150x50, 172x38, 172x51

上掀百葉濾網 Top open Louvered Filter



機箱由內往外鎖
Filter screwed from cabinet inside

TA-06

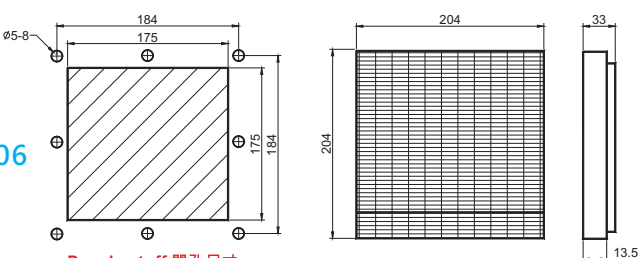

Panel cutoff 開孔尺寸

Inner Mat 濾棉: BU-172B


8"

適用風扇
Apply to fan
200x200x60 mm



FA-200

3合1濾網 Three-in-one Filter


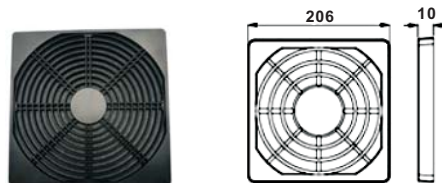


Model	Color of Cover (外殼顏色)	Inner filter (濾材)
FA-200	Black (黑)	Foam (泡棉)
FA-200A	Black (黑)	Non-woven (不織布)
FA-200B	White (白)	Non-woven (不織布)
BU-200	-	Foam (泡棉)
BU-200A	-	Non-woven (不織布)

百葉濾網 Louvered Filter



SA-08

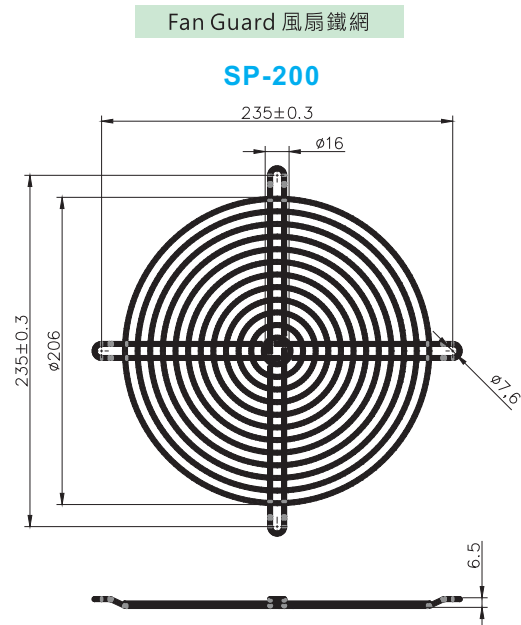
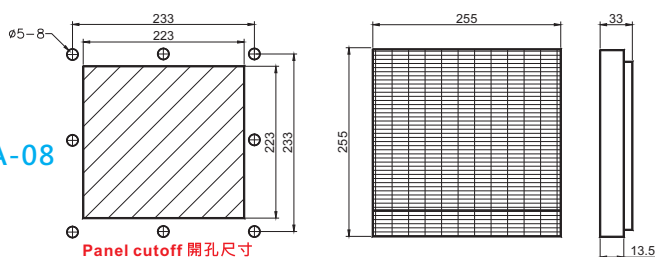


8"

適用風扇
Apply to fan
205x205x72 mm



SA-08A

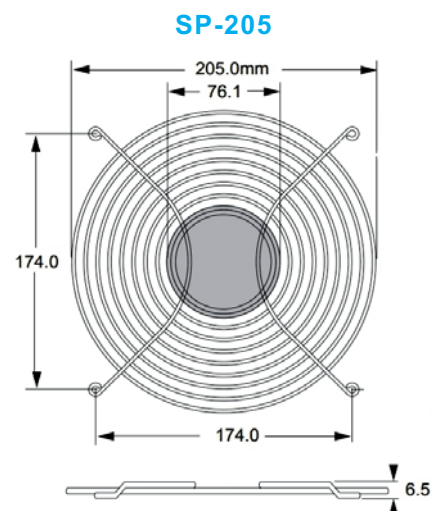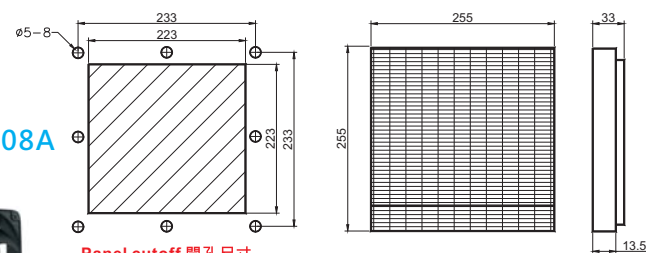

百葉濾網 Louvered Filter

Panel cutoff 開孔尺寸

Installation 開孔尺寸(mm): 223x223
Max. wind speed 最大風速: 2.5m /second
Collection coefficient 集塵效率: 80%
Temperature range 使用溫度: -10℃ ~ +85℃
Material 材質: ABS resin
Protection grade 防護等級: IP-54
For fan size 適合風扇尺寸 (mm): Φ172x51, 180x65, 200x60, 205x72, 220x60, 220x89



Inner Mat 濾棉: BU-200B

10"

適用風扇
Apply to fan
Φ254x89 mm



SA-10

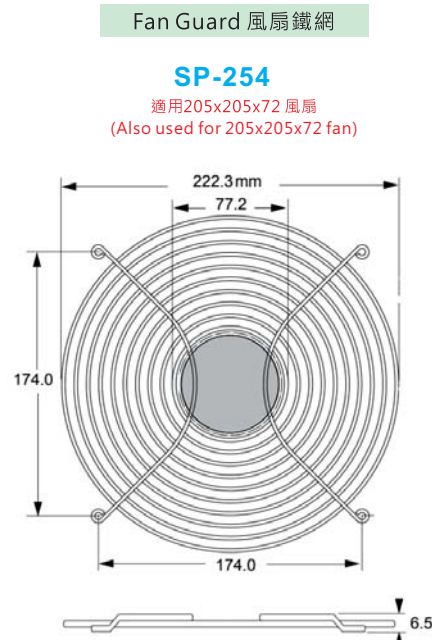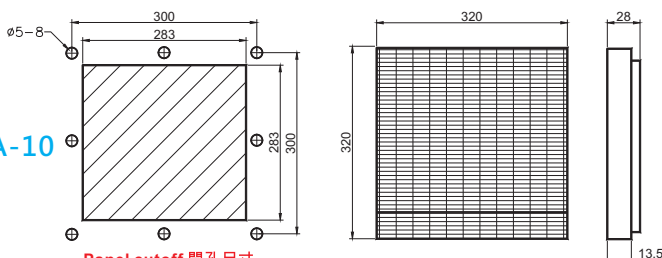

百葉濾網 Louvered Filter

Panel cutoff 開孔尺寸

Installation 開孔尺寸(mm): 283x283
Max. wind speed 最大風速: 2.5m /second
Collection coefficient 集塵效率: 80%
Temperature range 使用溫度: -10℃ ~ +85℃
Material 材質: ABS resin
Protection grade 防護等級: IP-54
For fan size 適合風扇尺寸 (mm): Φ172x51, 180x65, 200x60, 205x72, 220x60, 254x89

Inner Mat 濾棉: BU-254B

Fan Guard 風扇鐵網

SP-254

適用205x205x72 風扇
(Also used for 205x205x72 fan)