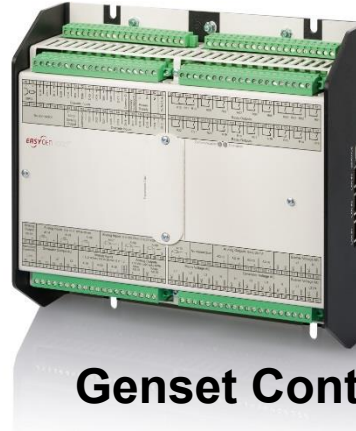


easYgen-3400XT/3500XT


Genset Control for Complex Paralleling Operation

DESCRIPTION

Woodward raised the standard in genset paralleling control and power management system with the easYgen-3000XT Series controllers. These controllers come with standardized software that is simple to configure, yet easily customized for individual applications. Enhanced connectivity enables fast, reliable and secure interfacing to other controls and communications systems while the enhanced hardware is a drop-in replacement for previous generation easYgen-3000 Series Controls.

The easYgen-3500XT with a dedicated CANopen network for connectivity to up to 16 LS-5 Circuit Breaker Controls, enables control of complex distribution systems having multiple utility feeds and tie breakers, and parallel load sharing of up to 32 generators on up to 32 different bus segments. Redundant load sharing is selectable using both Ethernet B and C networks for improved reliability. The control combines complete engine-generator control and protection with advanced, peer-to-peer paralleling functionality and innovative features in a robust, attractive, user-friendly and all-in-one package. The easYgen-3500 XT controls are designed to direct connect up to 690Vac and operate to 4000m above sea level without derating.

The easYgen-3500XT is available in two packages. P1, focused at complex paralleling applications provides redundant Ethernet communication, LS-5 connectivity, and standard I/O set, while P2, Co-Gen/CHP model offers expanded onboard I/O set, 3-ph busbar voltage measurement capability and an interface expansion card slot for an additional interface/protocol. These packages also come without a display in a rugged metal housing suitable for back panel installations (easYgen-3400XT-P1 and easYgen-3400XT-P2 respectively). A sophisticated touch screen remote panel (RP-3000XT) complements them as operator control panel. A version of easYgen-3500XT (easYgen-3500XT-P1-LT and easYgen-3500XT-P2-LT) is designed to operate down to -40°C for outdoor applications.

FEATURES

- Full connectivity of up to 32 Generators and 16 LS-5 circuit breaker controls in one application
- Run-up synchronization / Dead Field Paralleling to quickly get several synchronous generators onto the load
- Three-phase true RMS power sensing with Class I accuracy
- Operation modes: AUTO, STOP, MANUAL, and TEST - accessible through face plate or discrete input
- Breaker control: Slip frequency / phase matching synchronization, open / close control, breaker monitoring
- Load transfer: open / closed transition, interchange, soft loading / unloading, Utility parallel
- Load share and device to device communication over CAN or Ethernet (Redundant possible)
- Remote control via interface (Modbus TCP, Modbus RTU) and via discrete/analog inputs for adjusting speed, frequency, voltage, power, reactive power, and power factor set points
- Freely configurable PID controllers for various control purposes, such as heating circuit control (CHP applications), water level, fuel level, pressure and / or other process variables
- Direct support to several ECUs: Scania S6, MTU ADEC ECU7/8/9, Volvo EMS2 & EDC4, Deutz EMR2 & EMR3, MAN MFR / EDC7, SISU EEM, Cummins and Woodward EGS02 ECU
- Field ECU support and additional I/O expansion board connectivity through sequencer files
- "System Update" function for online troubleshooting and adding / removing generator sets
- Time / Date synchronization over Simple Network Time Protocol (SNTP)
- Cylinder head / exhaust temperature monitoring (Temperatures come from J1939 or CANopen devices)
- Woodward ToolKit™ software for flexible setup from a single connection to the network. The ToolKit can be accessed either via USB, or Ethernet or CAN ports.
- Multi-lingual capability: English, German, Spanish, French, Italian, Portuguese, Japanese, Chinese, Russian, Turkish, Polish, Slovakian, Finnish, Swedish

New Features

- ✓ Built-In Redundant Ethernet
- ✓ Power Measurement Class 1
- ✓ Direct Connect Up to 690 V_{AC}
- ✓ AnalogManager & Editable Screens
- ✓ Multi-Interface ToolKit connectivity
- ✓ New face plate with tactile buttons
- ✓ Drop-In replacement


- Premium genset control for complex paralleling applications of up to 32 gensets and up to 16 MCB/GGB/Tie Breakers in
- Prime Power & Cogeneration (CHP)
- Peak shaving operation
- Emergency operation
- Import/Export operation
- Islanded & Utility parallel operation
- Integrated Generator Group Breaker (GGB) control
- Run-Up Synchronization
- Master or Slave control capability
- Complete engine, generator and utility protection
- Up to 9 communication ports: 3xEthernet, 3xCAN (CANopen and J1939), RS-485, USB, Interface expansion card
- Customizable logic, HMI screens, and alarms
- Dedicated low temperature display variants
- UL61010, UL6200, RoHS2 and marine (ABS, LR) compliance

Analog inputs (isolated)		freely scalable
Type 1	0 to 1 V / 0 to 2000 Ohms / 0 to 20 mA	
Resolution	16 Bit	
Maximum permissible voltage against genset Ground	9 V	
Maximum permissible voltage between genset Ground & PE	100 V	
Type 2 (P2 only)	0 to 10 V / 0 to 20 mA	
Resolution	14 Bit	
Maximum permissible voltage against PE (Ground)	100 V	
Maximum differential voltage to other DC Analog Inputs	15 V	
Type 3 (P2 only)	0 to 250 Ohms / 0 to 2500 Ohms	
Resolution	14 Bit	
Maximum permissible voltage against PE (Ground)	100 V	
Maximum differential voltage to other DC Analog Inputs	10 V	
Analog outputs (isolated)		freely scalable
Type 1	$\pm 10\text{ V}$ / $\pm 20\text{ mA}$ / PWM	
Basic insulation voltage (continuously, AVR_{out})	500 V _{AC}	
Reinforced insulation voltage (continuously, AVR_{out})	300 V _{AC}	
Insulation voltage (continuously, GoV_{out})	100 V _{AC}	
Resolution	12 Bit	
Output $\pm 10\text{ V}$ (scalable)	internal resistance	
Output $\pm 20\text{ mA}$ (scalable)	maximum load 500 Ohms	
Type 2 (P2 only)	0/4 to 20 mA	
Insulation voltage (continuously)	100 V _{AC}	
Insulation voltage (test; >2 s)	1700 V _{AC}	
Resolution	12 Bit	
Output	maximum load 500 Ohms	
Housing Front panel flush mounting		
		Plastic housing
Dimensions	WxHxD	282 × 216 × 96 mm
Front cutout	WxH	249 [+1.1] × 183 [+1.0] mm
Connection	screw/plug terminals 2.5 mm ²	
Front	insulating surface	
Sealing	Front	IP66 (with screw fastening)
	Front	IP54 (with clamp fastening)
	Back	IP20
Weight	approx. 1,850 g	
Housing Back panel mounting		
		Powder Coated Sheet metal housing
Dimensions	WxHxD P1:	250 × 228 × 50 mm
	P2:	250 × 228 × 84 mm
Connection	screw/plug terminals 2.5 mm ²	
Protection system	IP 20	
Weight	approx. 1,750 g	
Disturbance test (CE)		
tested according to applicable IEC standards		
Listings		
CE, UL, EAC, VDE, BDEW; pending: CSA		
Marine		
LR (Type Approval), pending: ABS (Type Approval)		


* 3 phase 3 wire Δ constellations are limited to 600 V_{AC} system

DIMENSIONS

Plastic housing for front panel mounting

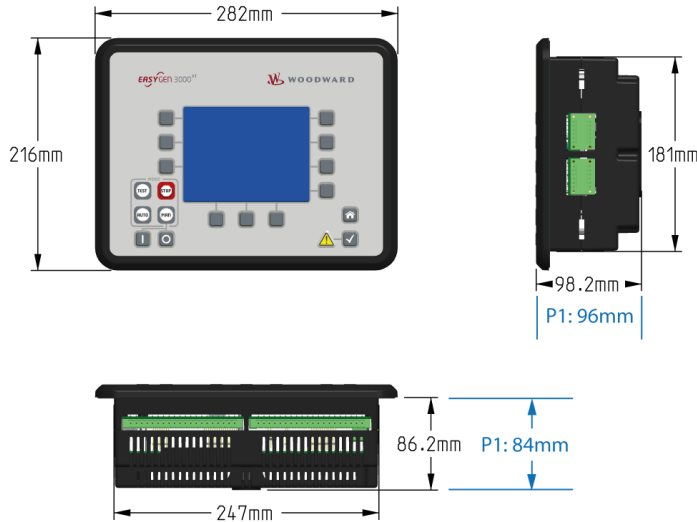


Metal housing for cabinet mounting

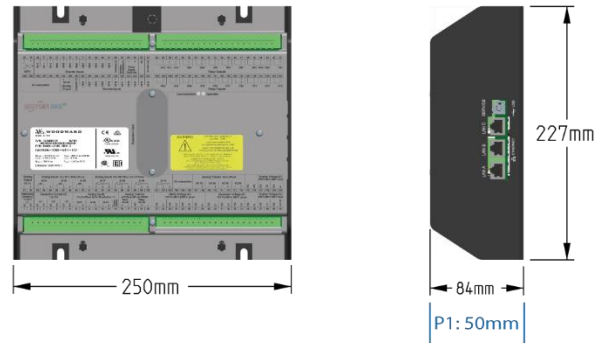

P1 is more compact (note depth/height in blue)

TERMINAL DIAGRAM

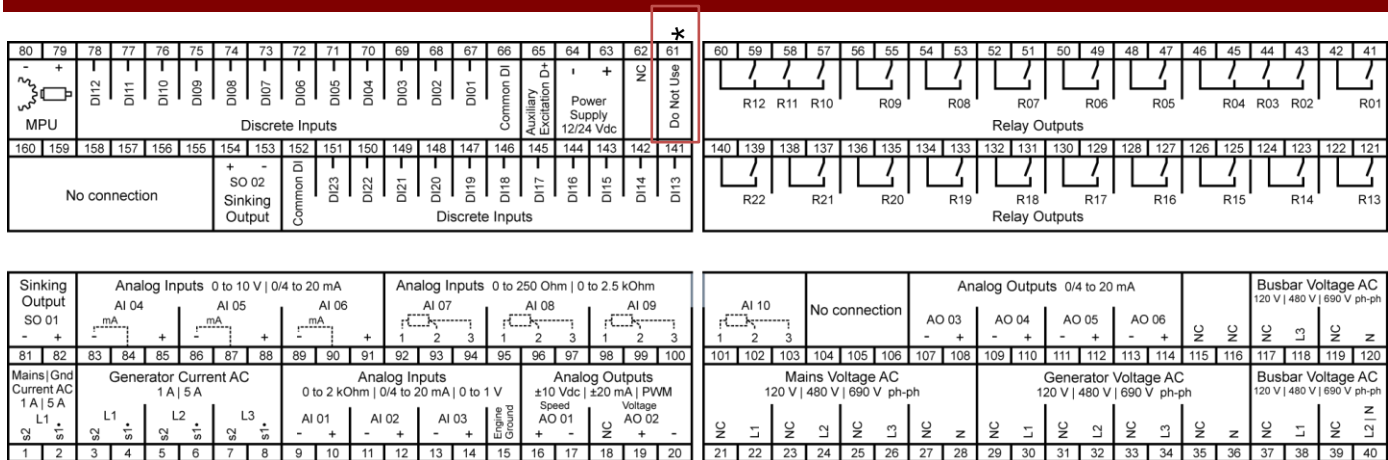

P2: pins 01-160 as shown above; P1: pins 01-80 only!

* pin 61

easYgen-3400XT: No connection
easYgen-3500XT: Protective earth

RELATED PRODUCTS

- Circuit Breaker Controller **LS-511/521** (Product Specification # 37522)
- Remote Panel **RP-3000XT** (Product Specification # 37592)
- **ToolKit** (Product Specification # 03366)
- I/O Expansion Board **IKD1** (Product Specification # 37171)
- Engine Speed Control **actiVgen** (Product Specification # 03419): P/N 8440-2100
- Load Share Gateway **LSG** (Product Specification # 37451)
- Electronic Pickup Unit **EPU-100** (Product Specification # 37562)
- CANbus based Remote Annunciator (Product Specification # 37279): **easYlite 100** P/N 8446-1023
- **Power Generation Learning Module** (Product Specification # 03412): P/N 8447-1012
- Profibus Gateway (Application Note # 37577): **ESEPRO** P/N 8445-1046
- Ethernet (Modbus/TCP) Gateway (Application Note # 37576): **ESENET** P/N 8445-1044
- CANbus to Fiber Optic Converters (Application Note # 37598): **DL-CAN** P/N 8445-1049 and **DL-CAN-R** P/N 8445-1048
- Remote Access Gateway (with HMS Netbiter **EasyConnect EC250** and **EC350**)
- Thermocouple Scanner (**AXIOMATIC AXTC20**)
- WAGO expansion CAN Couplers

CONTACT

North & Central America

Tel.: +1 970 962 7331

✉ SalesPGD_NAandCA@woodward.com

South America

Tel.: +55 19 3708 4800

✉ SalesPGD_SA@woodward.com

Europe

Tel. Stuttgart: +49 711 78954 510

Tel. Kempen: +49 2152 145 331

✉ SalesPGD_EUROPE@woodward.com

Middle East & Africa

Tel.: +971 2 6275185

✉ SalesPGD_MEA@woodward.com

Russia

Tel.: +7 812 319 3007

✉ SalesPGD_RUSSIA@woodward.com

China

Tel.: +86 512 8818 5515

✉ SalesPGD_CHINA@woodward.com

India

Tel.: +91 124 4399 500

✉ SalesPGD_INDIA@woodward.com

ASEAN & Oceania

Tel.: +49 711 78954 510

✉ SalesPGD_ASEAN@woodward.com

www.woodward.com

Subject to alterations, errors excepted.

Subject to technical modifications.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Company contractual or warranty obligation unless expressly stated in a written sales contract.

We appreciate your comments about the content of our publications. Please send comments including the document number below to
stgt-doc@woodward.com

© Woodward

All Rights Reserved

For more information contact:

		easYgen-3000XT Series			
		Model Package	3400XT P1	3500XT P2	3500XT P1(-LT) P2(-LT)
Measuring					
Generator voltage	(up to 690 V _{AC})			3-ph	
Generator current	(1 A or 5 A software selectable)			3-ph	
Mains voltage	(up to 690 V _{AC})			3-ph	
Mains or ground current	(1 A or 5 A software selectable)			1-ph	
Busbar voltage	(up to 690 V _{AC})	1-ph	3-ph	1-ph	3-ph
Control					
Breaker control logic (open and closed transition)	<i>FlexApp™</i>			3	
Number of supported Woodward LS-5 unit				16	
Automatic, Manual, Stop, and test operating modes					
Single and multiple-unit operation					
Mains parallel multiple-unit operation (up to 32 units)					
AMF (auto mains failure) and stand-by operation					
Critical mode operation					
GCB and MCB synchronization (slipping / phase matching)				✓	
GGB (Generator Group Breaker) Control					
Import / export control (kW and kvar)					
Load-dependent start/stop					
n/f, V, P, Q, and PF control via analog input or interface					
Load/var sharing for up to 32 gensets					
Freely configurable PID controllers				3	
HMI					
Color Display with Softkey operation	<i>DynamicsLCD™</i>	-			✓
Start/stop logic for diesel / gas engines					
Counters for operating hours / starts / maintenance / active/reactive energy				✓	
Configuration via PC (USB serial connection & ToolKit software (included))					
Event recorder entries with real time clock (battery backup)				300	
Operating Temperature		-40 to 70 °C			(-40/-)20 to 70 °C
Protection ANSI#					
Generator: voltage / frequency	59 / 27 / 810 / 81U				
Generator: overload, reverse/reduced power	32 / 32R / 32F				
Generator: Synch Check	25				
Generator: unbalanced load	46				
Generator: instantaneous overcurrent	50				
Generator: time-overcurrent (IEC 255 compliant)	51 / 51 V				
Generator: ground fault (measured ground current)	50G				
Generator: power factor	55			✓	
Generator: rotation field					
Engine: overspeed / underspeed	12 / 14				
Engine: speed / frequency mismatch					
Engine: D+ auxiliary excitation failure					
Engine: Cylinder temperature					
Mains: voltage / frequency / synch check	59 / 27 / 810 / 81U / 25				
Mains: phase shift / rotation field / ROCOF (df/dt)	78				
Busbar: voltage / frequency / Phase Rotation		✓ / ✓ / -	✓ / ✓ / ✓	✓ / ✓ / -	✓ / ✓ / ✓
I/Os					
Speed input: magnetic / switching; Pickup				✓	
Discrete alarm inputs (configurable)		12 (9)	23 (20)	12 (9)	23 (20)
Discrete outputs, configurable	<i>LogicsManager™</i>	max. 12	max. 22	max. 12	max. 22
External discrete inputs / outputs via CANopen				32 / 32	
Analog inputs #1, configurable	<i>FlexIn™</i>	3	10	3	10
Analog outputs: ± 10V, ± 20mA, PWM; configurable	<i>AnalogManager™</i>	2	2	2	2
Analog outputs: 0 to 20 mA (0 to 10 V with external 500 Ω resistor)		-	4	-	4
External analog inputs / outputs via CANopen				16/4	
Display and evaluation of J1939 analog values, "supported SPNs"				100	
CAN bus communication interfaces #2	<i>FlexCAN™</i>			3	
Ethernet Modbus TCP Slave interface				3	
USB Serial interface				1	
RS-485 Modbus RTU Slave interface				1	
Interface Expansion Capability		-	✓	-	✓
Listings/Approvals					
UL / cUL Listing (61010 ,6200), pending: CSA (USA and Canada),					
BDEW, VDE, EAC; CE Marked				✓	
LR, pending: ABS (TA)					
Part Numbers					
Front panel mounting with display #3		-	-	8440-2085	8440-2088
(... and enhanced operating temperature range)				(8440-2086)	(8440-2089)
Cabinet back mounting w/o display		8440-2084	8440-2087	-	-

#1 selectable senders: VDO (0 to 180 Ohm, 0 to 5 bar), VDO (0 to 180 Ohm, 0 to 10 bar), VDO (0 to 380 Ohm, 40 to 120°C), VDO (0 to 380 Ohm, 50 to 150°C), Pt100, Pt1000, resistive input (one- or two-pole, 2pt. linear or 9pt. user defined)

#2 CAN#2 freely selectable during configuration between CANopen or J1939; please feel free to request more information

#3 A screw and a clamp kit are delivered with the unit for fastening