

VINYL-INSULATED PIGGY BACK DISCONNECTORS

MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14	12	10
AMP.	3	4	7	10	15	20	24

MAXIMUM ELECTRICAL RATING : 75°C 300 VOLTS MAX.

INSULATION MATERIAL : VINYL TERMINAL MATERIAL : BRASS

INSULATION COLOR :

22-16 A.W.G.: RED

16-14 A.W.G.: BLUE


12-10 A.W.G.: YELLOW

TERMINAL BARREL I.D.:

22-16 A.W.G.: C=1.7mm

16-14 A.W.G.: C=2.3mm

12-10 A.W.G.: C=3.4mm

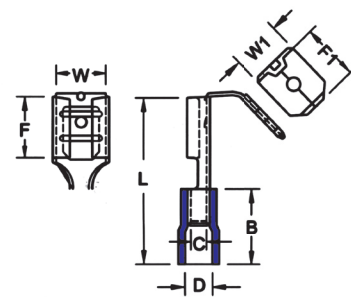

WIRE RANGE A.W.G. mm ²	ITEM NO.	NEMA TAB	DIMENSION inch mm								CRIMPING TOOL	Q'TY BOX
			W	W1	F	F1	L	B	D	T		
22-16 A.W.G. 0.5-1.5 mm ²	PBDV1-250	.032 x .250 (0.8 x 6.35)	.260 6.6	.250 6.35	.315 8.0	.323 8.2	.866 22.0	.394 10.0	.157 4.0	.016 0.4	K.S.MODEL KST2000C WITH DIE INDEX COLOR:RED	1000
16-14 A.W.G. 1.5-2.5 mm ²	PBDV2-250	.032 x .250 (0.8 x 6.35)	.260 6.6	.250 6.35	.315 8.0	.323 8.2	.866 22.0	.394 10.0	.177 4.5	.016 0.4	K.S.MODEL KST2000C WITH DIE INDEX COLOR:BLUE	1000
12-10 A.W.G. 4-6 mm ²	PBDV5-250	.032 x .250 (0.8 x 6.35)	.260 6.6	.250 6.35	.315 8.0	.323 8.2	.945 24.0	.512 13.0	.217 5.5	.016 0.4	K.S.MODEL KST2000C WITH DIE INDEX COLOR:YELLOW	500

 ALL LISTED