


BCE10-QF5.5-AP6X2 極扁型三用途位置



BCE10-QF5.5-AN6X2 靜電容量型傳感器


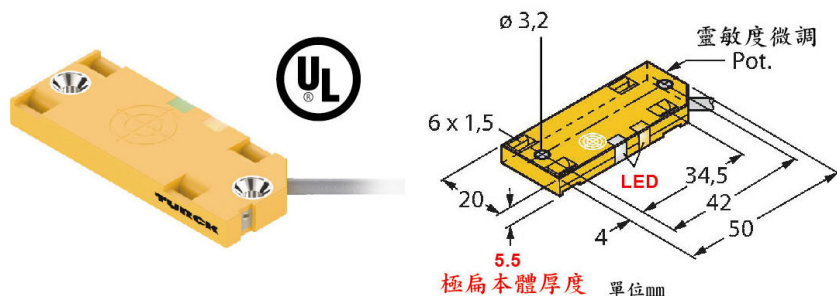


- 一體三用型
- 液體管路(不受液體顏色影響)
液位位置檢測
- 全密閉環境flush可用型
- 半密閉環境non flush可用型


Technical data

ID 100025146	Type	BCE10-QF5.5-AP6X2	(PNP.N.O.)
ID 100029093	Type	BCE10-QF5.5-AN6X2	(NPN.N.O.)
Rated switching distance (flush)		10 mm	
Rated switching distance (non-flush)		10 mm	
Operating voltage		10...30 VDC	
Switching frequency		0.05 kHz	
Output function		3-wire, NO contact, PNP or NPN type	
Short-circuit protection		yes / Cyclic	
Cable quality		Ø 3 mm, Lif9Y-11Y, PUR, 2 m cable	
Protection class		IP65	
Power-on /LED Green		Switching state / LED, Yellow	

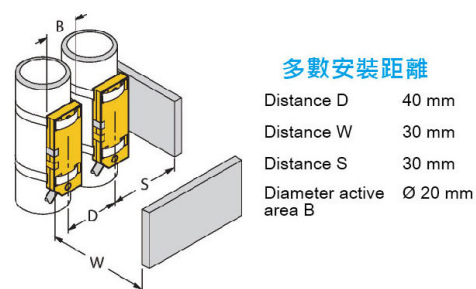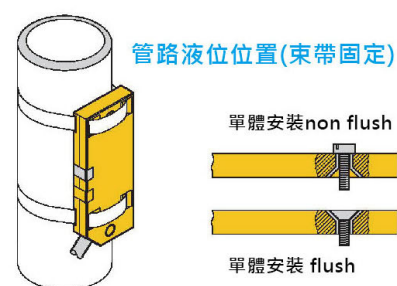

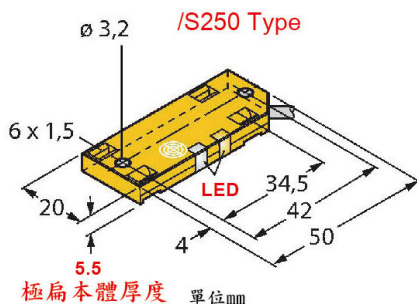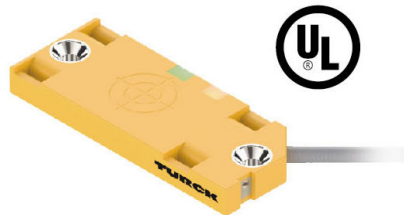BC5-QF5.5-AP6X2/S250
BC10-QF5.5-AP6X2
半導體電子設備
供酸系統專家型
靜電容量型傳感器


液體管路(不受液體顏色影響)液位位置檢測

 管路液位位置
(束帶固定)


多數安裝距離

 Distance D 40 mm
 Distance W 30 mm
 Distance S 30 mm
 Diameter active area B Ø 20 mm

Technical data

ID 2620116	Type	BC5-QF5.5-AP6X2/S250
ID 2620117	Type	BC10-QF5.5-AP6X2
Rated switching distance (flush)	BC5/5 mm	BC10/10mm
Rated switching distance (non-flush)	BC5/5 mm	BC10/10mm
Operating voltage	10...30 VDC	
Switching frequency	0.1 kHz	
Output function	3-wire, NO contact, PNP type	
Short-circuit protection	yes / Cyclic	
Cable quality	Ø 3 mm, Lif9Y-11Y, PUR, 2 m cable	
Protection class	IP67	
Power-on /LED Green	Switching state / LED, Yellow	



台灣傳感微控網



@SensorSolution

www.e-sensors.com.tw
台灣傳感科技有限公司

TEL:+886-7-7323606

FAX:+886-7-7333023

E-mail: ez-corp@umail.hinet.net