
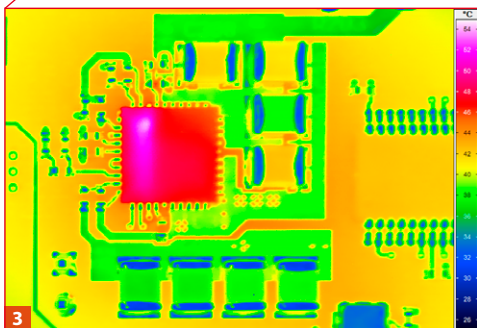


ImageIR® 10300

Full HD Thermography Camera

INFRA^{TEC}.

Europe's leading specialist for infrared sensors and measurement technology

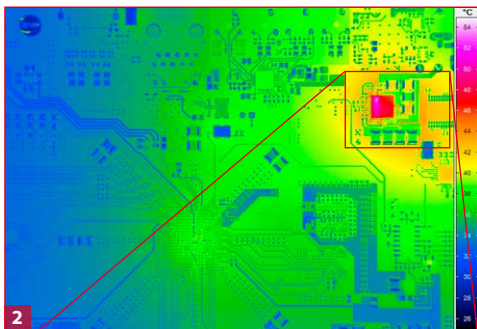

- 1) ImageIR® 10300 with (1,920 × 1,536) IR pixels
- 2) Format-filling image of circuit board
- 3) Detailed zoom into image

Cooled FPA photon detector with (1,920 × 1,536) IR pixels

Full-frame rate up to 100 Hz, 10 GigE interface

Snapshot detector, internal trigger interface

Complete optical assortment

Pixel size with microscopic lens up to 1.3 µm

Thermal resolution better than 0.022 K

Made in Germany



www.InfraTec.eu

www.InfraTec-infrared.com


Made in Germany



Latest information on the internet.

Spectral range	(3.6 ... 4.9) μm
Pitch	10 μm
Detector	InSb
Detector format (IR pixels)	(1,920 \times 1,536)
Image acquisition	Snapshot
Readout mode	ITR/IWR
Aperture ratio	f/2.0
Detector cooling	Stirling cooler
Temperature measuring range	(-40 ... 1,200) $^{\circ}\text{C}$
Measurement accuracy	$\pm 1^{\circ}\text{C}$ or $\pm 1\%$
Temperature resolution @ 30 $^{\circ}\text{C}$	0.035 K / 0.022 K in high-speed mode
Frame rate (full / half / quarter / sub frame)*	Up to 113 / 216 / 396 / 1,915 Hz; high speed mode: up to 400/692/1,088/2,493 Hz
Window mode	Yes
Focus	Manual, motorised or automatically*
Dynamic range	13 bit
Integration time	(1 ... 20,000) μs
Rotating aperture wheel and filter wheel*	Up to 5 positions
Interfaces	10 GigE, HDMI*
Trigger	3 IN / 2 OUT, TTL
Analogue signals*, IRIG-B*	2 IN / 2 OUT, yes
Tripod adapter	1/4" and 3/8" photo thread, 2 \times M5
Power supply	24 V DC, wide-range power supply (100 ... 240) V AC
Storage and operation temperature	(-40 ... 70) $^{\circ}\text{C}$, (-20 ... 50) $^{\circ}\text{C}$
Protection degree	IP54, IEC 60529
Dimensions, weight	(241 \times 123 \times 160) mm, 4.7 kg (without lens)
Further functions	High-speed mode*, Multi Integration Time*
Analysis and evaluation software	IRBIS [®] 3, IRBIS [®] 3 view, IRBIS [®] 3 plus*, IRBIS [®] 3 professional*, IRBIS [®] 3 control*, IRBIS [®] 3 online*, IRBIS [®] 3 process*, IRBIS [®] 3 active*, IRBIS [®] 3 mosaic*, IRBIS [®] 3 vision*

* Depending on model

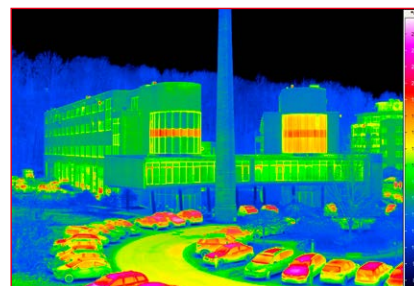

With its **detector format of (1,920 \times 1,536) IR pixels** the ImageIR[®] 10300 sets new standards in geometric resolution worldwide and creates thermograms with an unprecedented image detail and sharpness. For the first time an infrared camera for civil use with a cooled photon detector permits **Full HD images**. In combination with the small **pitch dimension of 10 μm** , this ensures that measurement, inspection and surveillance tasks can be solved even more efficiently than before. For example, everywhere such very fine structures need to be analysed on large-surface measurement objects, users save time, effort and thus costs.

Despite the detector format of about 3 Megapixels, the transfer of **full frame images** achieves a rate **up to 113 Hz**. Thanks to the **10 GigE interface** of the ImageIR[®] 10300 users can store large amounts of measurement data on a computer in the shortest amount of time. The interface is a part of the modular design of the entire high-end camera series ImageIR[®]. Individual adjustments like retrofitting a remotely controllable filter and aperture wheel or a motor focus unit can easily be realised. A broad variety of infrared lenses with highest optical performance parameters provides the camera's **outstanding thermal sensitivity**.

Lenses	Focal length (mm)	FOV ($^{\circ}$)	IFOV (mrad)
Wide-angle lens	25	(42.0 \times 34.2)	0.4
Standard lens	50	(21.7 \times 17.5)	0.2
Telephoto lens	100	(11.0 \times 8.8)	0.1

Macro and microscopic lenses	Minimum object distance (mm)	Object size (mm)	Pixel size (μm)
Close-up for telephoto lens 50 mm	300	(115 \times 92)	60
Close-up for telephoto lens 100 mm	500	(96 \times 77)	50
Microscopic lens M=1.0 \times	40	(19 \times 15)	10
Microscopic lens M=8.0 \times	14	(2.4 \times 1.92)	1.3

Headquarters

InfraTec GmbH
Infrarotsensorik und Messtechnik
 Gostritzer Str. 61 – 63
 01217 Dresden / GERMANY
 Phone +49 351 82876-610
 Fax +49 351 82876-543
 E-mail thermo@InfraTec.de

USA office

InfraTec infrared LLC
 5048 Tennyson Pkwy.
 Plano TX 75024 / USA
 Phone +1 844-226-3722 (toll free)
 E-mail thermo@InfraTec-infrared.com

© InfraTec 09/2019 (All stated product names and trademarks remain in property of their respective owners.)
 Design, specification and technical progress subject to change without prior notice.

Further information at: www.InfraTec.eu or for US www.InfraTec-infrared.com