



Product Name: Two Door Controller

Product Type: JST-250


Features:

- Standalone Or PC On Line Through The Software
- Support 8,000 history transaction (each door 4,000)
- Card Capacity Is 15,000 cards, Each Card Can Be Set 4 Digit Personal ID
- Built-in RS232/RS485 Interface
- Intranet Or Internet Network With Two Option Device
 1. Built-in TCP/IP Module
 2. External TCP/IP Converter
- Operating Mode-Card Only, Card with Keypad, Keypad Only, Facility Code Only or Free Access

For Specific Door

- Built-in Watch Dog feature.
- Built-in One Buzzer And Four LED Indicators
- 8 Programmable Time Zones, 3 Schedules Per Time Zone
- Built-in Clock And Calendar
- Programmable Door Release Time From 1~255 Seconds
- PC Programmable, Control 2 Wiegand Output Reader Or I/O Interface Card For Remote Control
- Data Is Protected Even After Power Failure
- Controller ID Can Be Set Through DIP Switch
- Provides Four Relay NO/NC Contact Point

JST-250 to Wiegand Card Reader Configuration

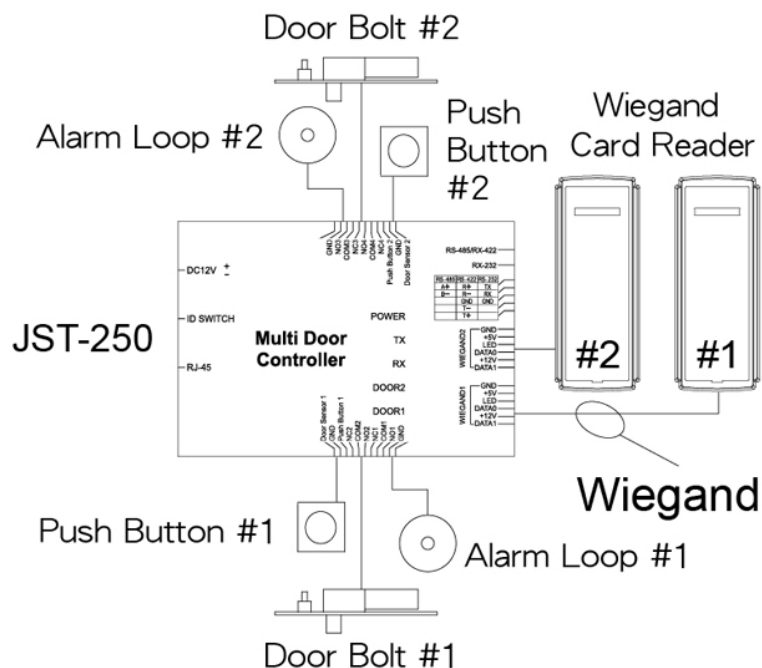

Specifications:

- Power requirement: DC 12V/1.5A
- Communication interface: Provides 2 RS232/RS485 interface
- Provides 4 input DI and 4 Output relay for DO
- Operating temperature: 0 ~60
- Dimension: 110mm x 95mm x 26mm

Ordering Information:

Reference models:

Taiwan Jantek Electronics., Ltd.

Add:6F-1, No. 1, Wuquan 1St.Rd.,Xinzhuang District, TEL : 886-2-22991255

New Taipei City 24892,Taiwan, R.O.C.

FAX : 02-2299-1257 / 02-2299-7412

www.jantek.com.tw

Email : service@jantek.com.tw