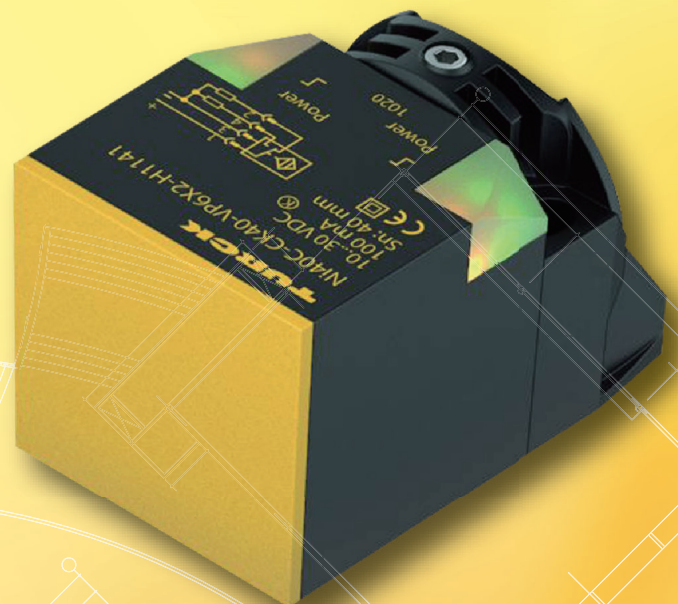


TURCK



智動化 工程類 近接傳感器



CK40



CK40 Style Sensors

	Design	Type code	output function	Switching distance
 uprox系列 不衰減型 近接傳感器	CK40	Bi30U-CK40-AN6X2-H1141	NPN/N.O. DC3線式	全密閉30 mm
		Bi30U-CK40-AP6X2-H1141	PNP/N.O. DC3線式	全密閉30 mm
		Ni50U-CK40-VN4X2-H1141	NPN/N.O.+N.C. DC4線式	半密閉50 mm
		Ni50U-CK40-VP4X2-H1141	PNP/N.O.+N.C. DC4線式	半密閉50 mm
		Ni50U-CK40-IOL6X2-H1141	NPN/PNP N.O.+N.C. IO-Link DC4線式	半密閉50 mm
 類比輸出型 近接傳感器	CK40	Ni25-CK40-LIU-H1141	DC4線式 0...20mA 0-10V	類比檢距 4...24mm
 超聲波傳感器	CK40	RU200-CK40-2UN8X2T-H1151	NPN/N.O. DC5線式	50-2000 mm
		RU200-CK40-2UP8X2T-H1151	PNP/N.O. DC5線式	50-2000 mm
		RU200-CK40-LIU2N8X2T-H1151	NPN/N.O.+N.C. DC5線式 Analog 4-20mA/0-10V	50-2000 mm
		RU200-CK40-LIU2P8X2T-H1151	PNP/N.O.+N.C. DC5線式 Analog 4-20mA/0-10V	50-2000 mm
 二維型傾角計	Q42	B2N360-Q42-E2LIUPN8X2-H1181	NPN/PNP N.O.+N.C. 可選 Analog 0-20mA/0-10V可選 IO-Link DC8線式	量測範圍 0-360°
 專業的碳材質 檢測傳感器	CK40	Ni40C-CK40-VP6X2-H1141	PNP N.O.+N.C. DC4線式	40mm