




CABLE TIES

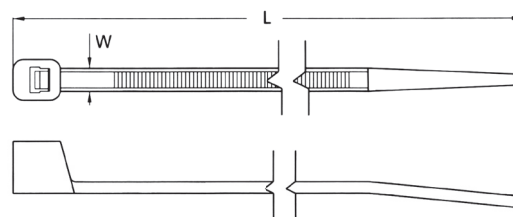

MAXIMUM SERVICE TEMPERATURE RANGE : - 40°C ~ 105°C

MATERIAL : NYLON 66


FLAMMABILITY RATING : UL94V-2

ITEM NO.	LENGTH		WIDTH		MAX BUNDLE DIA.		MIN TENSILE STRENGTH	PACKING BAG
	mm	inch	mm	inch	mm	inch	lbs(kgs)	
K-75M	75	3	2.4	0.09	18.0	0.71	18 (8)	100 PCS
K-90M	96	3-3/4	2.5	0.1	23.0	0.91	18 (8)	
K-100M	100	4	2.5	0.1	25.0	0.98	18 (8)	
K-120M	120	4-3/4	2.5	0.1	30.0	1.18	18 (8)	
K-120I	120	4-3/4	3.2	0.3	30.0	1.18	40 (18)	
K-120S	120	4-3/4	4.8	0.19	30.0	1.18	50 (22)	
K-140M	142	5-1/2	2.5	0.1	35.0	1.38	18 (8)	
K-140I	142	5-1/2	3.2	0.13	35.0	1.38	40 (18)	
K-150I	150	6	3.6	0.14	39.0	1.54	40 (18)	
K-160S	160	6-1/4	4.8	0.19	42.0	1.65	50 (22)	
K-165M	165	6-1/2	2.5	0.1	44.0	1.73	18 (8)	
K-180S	180	7	4.0	0.16	49.0	1.93	50 (22)	
K-190S	190	7-1/2	4.8	0.19	52.0	2.05	50 (22)	
K-200M	203	8	2.5	0.1	55.0	2.17	18 (8)	
K-200I	203	8	3.2	0.13	55.0	2.17	40 (18)	
K-200S	203	8	4.6	0.18	55.0	2.17	50 (22)	
K-200H	203	8	7.6	0.3	55.0	2.17	120 (55)	
K-240H	240	9-5/6	7.6	0.3	66.0	2.60	120 (55)	
K-250I	250	10	3.6	0.14	74.0	2.91	40 (18)	
K-250S	250	10	4.8	0.19	74.0	2.91	50 (22)	


 ALL LISTED



CABLE TIES

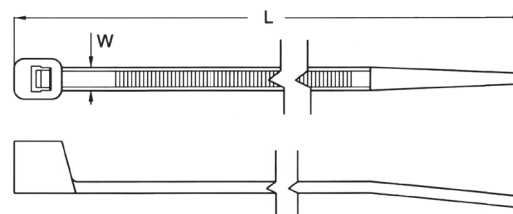

MAXIMUM SERVICE TEMPERATURE RANGE : - 40°C ~ 105°C

MATERIAL : NYLON 66

FLAMMBILITY RATING : UL94V-2

ITEM NO.	LENGTH		WIDTH		MAX BUNDLE DIA.		MIN TENSILE STRENGTH	PACKING BAG
	mm	inch	mm	inch	mm	inch	lbs(kgs)	
K-280S	280	11	4.8	.189	81	3.19	50 (22)	100 PCS
K-280H	280	11	7.6	.299	78	3.07	120 (55)	
K-300I	292	11-1/2	3.6	.142	85	3.35	40 (18)	
K-300H	300	11-5/8	7.6	.299	88	3.46	120 (55)	
K-300S	310	12	4.8	.189	89	3.5	50 (22)	
K-340H	340	13-1/2	7.6	.299	99	3.9	120 (55)	
K-370I	368	14-1/4	3.6	.142	102	4.02	40(18)	
K-370S	368	14-1/4	4.8	.189	102	4.02	50 (22)	
K-380H	380	15	7.6	.289	110	4.33	120 (55)	
K-385S	385	15-3/16	4.8	.189	116	4.57	50 (22)	
K-430S	432	17	4.8	.189	125	4.92	50 (22)	
K-450H	450	17-3/4	8.0	.315	133	5.24	175 (80)	
K-550H	550	21-11/16	8.0	.315	166	6.54	175 (80)	
K-550HL	550	21-11/16	13.0	.512	166	6.54	250 (114)	
K-760H	762	30	9.0	.354	236	9.29	175 (80)	
K-810H	812	32	9.0	.354	246	9.69	175 (80)	
K-1170H	1,168	46	9.0	.354	360	14.17	175 (80)	



 ALL LISTED



CABLE TIES (WEATHER RESISTANT UV TYPE)



MAXIMUM SERVICE TEMPERATURE RANGE : - 40°C ~ 105°C
MATERIAL : WEATHER RESISTANT NYLON 66 (ULTRAVIOLET)
FLAMMABILITY RATING : UL94V-2
COLOR : BLACK

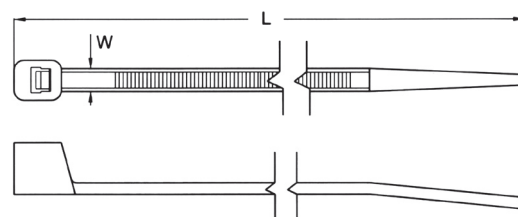


ITEM NO.	LENGTH		WIDTH		MAX BUNDLE DIA.		MIN TENSILE STRENGTH	PACKING BAG
	mm	inch	mm	inch	mm	inch	lbs(kgs)	
K-75MU	75	3	2.4	0.09	18.0	0.71	18 (8)	100 PCS
K-90MU	96	3-3/4	2.5	0.1	23.0	0.91	18 (8)	
K-100MU	100	4	2.5	0.1	25.0	0.98	18 (8)	
K-120MU	120	4-3/4	2.5	0.1	30.0	1.18	18 (8)	
K-120IU	120	4-3/4	3.2	0.3	30.0	1.18	40 (18)	
K-120SU	120	4-3/4	4.8	0.19	30.0	1.18	50 (22)	
K-140MU	142	5-1/2	2.5	0.1	35.0	1.38	18 (8)	
K-140IU	142	5-1/2	3.2	0.13	35.0	1.38	40 (18)	
K-150IU	150	6	3.6	0.14	39.0	1.54	40 (18)	
K-160SU	160	6-1/4	4.8	0.19	42.0	1.65	50 (22)	
K-165MU	165	6-1/2	2.5	0.1	44.0	1.73	18 (8)	
K-180SU	180	7	4.0	0.16	49.0	1.93	50 (22)	
K-190SU	190	7-1/2	4.8	0.19	52.0	2.05	50 (22)	
K-200MU	203	8	2.5	0.1	55.0	2.17	18 (8)	
K-200IU	203	8	3.2	0.13	55.0	2.17	40 (18)	
K-200SU	203	8	4.6	0.18	55.0	2.17	50 (22)	
K-200HU	203	8	7.6	0.3	55.0	2.17	120 (55)	
K-240HU	240	9-5/6	7.6	0.3	66.0	2.60	120 (55)	
K-250IU	250	10	3.6	0.14	74.0	2.91	40 (18)	
K-250SU	250	10	4.8	0.19	74.0	2.91	50 (22)	



 ALL LISTED



CABLE TIES (WEATHER RESISTANT UV TYPE)

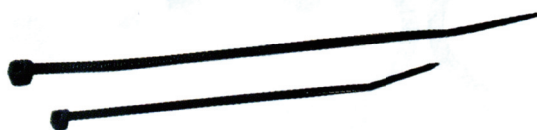

MAXIMUM SERVICE TEMPERATURE RANGE : - 40°C ~ 105°C
MATERIAL : WEATHER RESISTANT NYLON 66 (ULTRAVIOLET)
FLAMMABILITY RATING : UL94V-2
COLOR : BLACK

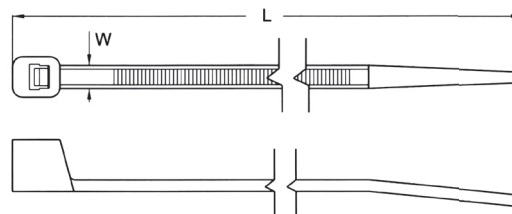

ITEM NO.	LENGTH		WIDTH		MAX BUNDLE DIA.		MIN TENSILE STRENGTH	PACKING BAG
	mm	inch	mm	inch	mm	inch	lbs(kgs)	
K-280SU	280	11	4.8	.189	81	3.19	50 (22)	100 PCS
K-280HU	280	11	7.6	.299	78	3.07	120 (55)	
K-300IU	292	11-1/2	3.6	.142	85	3.35	40 (18)	
K-300HU	300	11-5/8	7.6	.299	88	3.46	120 (55)	
K-300SU	310	12	4.8	.189	89	3.5	50 (22)	
K-340HU	340	13-1/2	7.6	.299	99	3.9	120 (55)	
K-370IU	368	14-1/4	3.6	.142	102	4.02	40(18)	
K-370SU	368	14-1/4	4.8	.189	102	4.02	50 (22)	
K-380HU	380	15	7.6	.289	110	4.33	120 (55)	
K-385SU	385	15-3/16	4.8	.189	116	4.57	50 (22)	
K-430SU	432	17	4.8	.189	125	4.92	50 (22)	
K-450HU	450	17-3/4	8.0	.315	133	5.24	175 (80)	
K-550HU	550	21-11/16	8.0	.315	166	6.54	175 (80)	
K-550HLU	550	21-11/16	13.0	.512	166	6.54	250 (114)	
K-760HU	762	30	9.0	.354	236	9.29	175 (80)	
K-810HU	812	32	9.0	.354	246	9.69	175 (80)	
K-1170HU	1,168	46	9.0	.354	360	14.17	175 (80)	

  ALL LISTED