



CLOSED END CONNECTORS


MAXIMUM ELECTRIC CURRENT:

| | | | | | | | | |
|--------|----|----|----|----|----|----|----|----|
| A.W.G. | 22 | 20 | 18 | 16 | 14 | 12 | 10 | 8 |
| AMP. | 9 | 12 | 17 | 18 | 30 | 35 | 50 | 70 |

MAXIMUM ELECTRICAL RATING : 105°C 300 VOLTS MAX.

CE & PB TYPE INSIDE SLEEVE IS COPPER TUBE.

CEF TYPE INSIDE SLEEVE IS STEEL DRAWN.

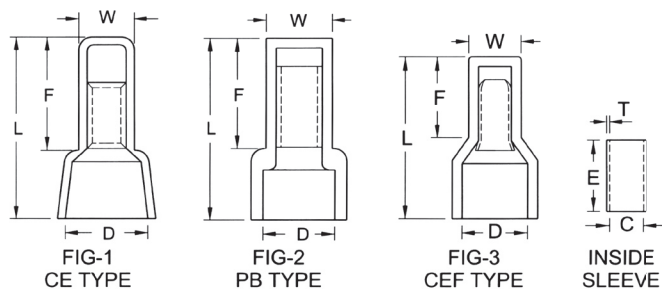

| WIRE RANGE A.W.G. mm ² | ITEM NO. | Standard | DIMENSION <small>inch mm</small> | | | | | | | FIG | CRIMPING TOOL | Q'TY BOX |
|---|----------|----------|--------------------------------------|--------------|---------------|--------------|-------------|--------------|--------------|-----|------------------------------------|----------|
| | | | W | F | L | D | E | T | C | | | |
| 22-16 A.W.G. 1.25 mm ² | CE 1 | UL CSA | .197 5.0 | .535 13.6 | .827 21.0 | .315 8.0 | .276 7.0 | .020 0.5 | .091 2.3 | 1 | IZUMI 7A OR K.S. MODEL KST2000G | 1000 |
| 16-14 A.W.G. 2 mm ² | CE 2 | UL CSA | .217 5.5 | .547 13.9 | .827 21.0 | .315 8.0 | .276 7.0 | .018 0.45 | .122 3.1 | 1 | IZUMI 7A OR K.S. MODEL KST2000G | 1000 |
| 12-10 A.W.G. 5.5 mm ² | CE 5 | UL CSA | .295 7.5 | .575 14.6 | 1.004 25.5 | .394 10.0 | .295 7.5 | .028 0.7 | .157 4.0 | 1 | IZUMI 7A OR K.S. MODEL KST2000G | 500 |
| 8 A.W.G. 8 mm ² | CE 8 | UL CSA | .370 9.4 | .709 18.0 | 1.173 29.8 | .472 12.0 | .335 8.5 | .049 1.25 | .173 4.4 | 1 | IZUMI 8 | 250 |
| 22-16 A.W.G. 1.25 mm ² | PB 1 | UL CSA | .197 5.0 | .346 8.8 | .598 15.2 | .236 6.0 | .276 7.0 | .020 0.5 | .091 2.3 | 2 | IZUMI 7A OR K.S. MODEL KST2000G | 1000 |
| 16-14 A.W.G. 2 mm ² | PB 2 | UL CSA | .228 5.8 | .346 8.8 | .598 15.2 | .248 6.3 | .276 7.0 | .018 0.45 | .122 3.1 | 2 | IZUMI 7A OR K.S. MODEL KST2000G | 1000 |
| 12-10 A.W.G. 5.5 mm ² | PB 5 | UL CSA | .287 7.3 | .346 8.8 | .701 17.8 | .362 9.2 | .295 7.5 | .028 0.7 | .157 4.0 | 2 | IZUMI 7A OR K.S. MODEL KST2000G | 500 |
| 8 A.W.G. 8 mm ² | PB 8 | UL CSA | .370 9.4 | .465 11.8 | .866 22.0 | .465 11.8 | .315 8.0 | .049 1.25 | .197 5.0 | 2 | IZUMI 8 | 250 |
| 22-16 A.W.G. 1.25 mm ² | CEF 2216 | | .197 5.0 | .366 9.3 | .602 15.3 | .295 7.5 | .295 7.5 | .015 0.38 | .093 2.35 | 3 | K.S. MODEL KST2000G | 1000 |
| 16-14 A.W.G. 2 mm ² | CEF 2214 | | .224 5.7 | .398 10.1 | .728 18.5 | .315 8.0 | .295 7.5 | .014 0.35 | .118 3.0 | 3 | K.S. MODEL KST2000G | 1000 |
| 12-10 A.W.G. 5.5 mm ² | CEF 1810 | | .311 7.9 | .378 9.6 | .787 20.0 | .402 10.2 | .335 8.5 | .016 0.4 | .197 5.0 | 3 | K.S. MODEL KST2000G | 500 |
| 8 A.W.G. 8 mm ² | CEF 188 | | .339 8.6 | .500 12.7 | .945 24.0 | .488 12.4 | .335 8.5 | .016 0.4 | .232 5.9 | 3 | K.S. MODEL KST2000G | 250 |
| 22-16 A.W.G. 1.25 mm ² | CE 1- | | .197 5.0 | .535 13.6 | .827 21.0 | .315 8.0 | .268 6.8 | .014 0.35 | .102 2.6 | 1 | IZUMI 7A OR K.S. MODEL KST2000G | 1000 |
| 16-14 A.W.G. 2 mm ² | CE 2- | | .217 5.5 | .547 13.9 | .827 21.0 | .315 8.0 | .268 6.8 | .014 0.35 | .130 3.3 | 1 | IZUMI 7A OR K.S. MODEL KST2000G | 1000 |
| 12-10 A.W.G. 5.5 mm ² | CE 5- | | .295 7.5 | .575 14.6 | 1.004 25.5 | .394 10.0 | .287 7.3 | .018 0.45 | .177 4.5 | 1 | IZUMI 7A OR K.S. MODEL KST2000G | 500 |
| 8 A.W.G. 8 mm ² | CE 8- | | .370 9.4 | .709 18.0 | 1.173 29.8 | .472 12.0 | .327 8.3 | .037 0.95 | .197 5.0 | 1 | IZUMI 8 | 250 |
| 22-16 A.W.G. 1.25 mm ² | PB 1- | | .197 5.0 | .346 8.8 | .598 15.2 | .236 6.0 | .268 6.8 | .014 0.35 | .102 2.6 | 2 | IZUMI 7A OR K.S. MODEL KST2000G | 1000 |
| 16-14 A.W.G. 2 mm ² | PB 2- | | .228 5.8 | .346 8.8 | .598 15.2 | .248 6.3 | .268 6.8 | .014 0.35 | .130 3.3 | 2 | IZUMI 7A OR K.S. MODEL KST2000G | 1000 |
| 12-10 A.W.G. 5.5 mm ² | PB 5- | | .287 7.3 | .346 8.8 | .701 17.8 | .362 9.2 | .287 7.3 | .018 0.45 | .177 4.5 | 2 | IZUMI 7A OR K.S. MODEL KST2000G | 500 |
| 8 A.W.G. 8 mm ² | PB 8- | | .370 9.4 | .465 11.8 | .866 22.0 | .465 11.8 | .327 8.3 | .037 0.95 | .197 5.0 | 2 | IZUMI 8 | 250 |