


Winton[®]

Professional



HIGH QUALITY

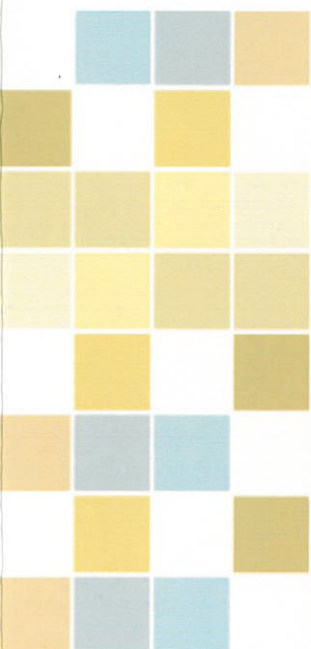

Classic Tile

采岩系列七




Winton[®] *Classic Tile* 采岩系列

Size : 18"x18"x1.5mm Package: 16pcs/ctn



B1610

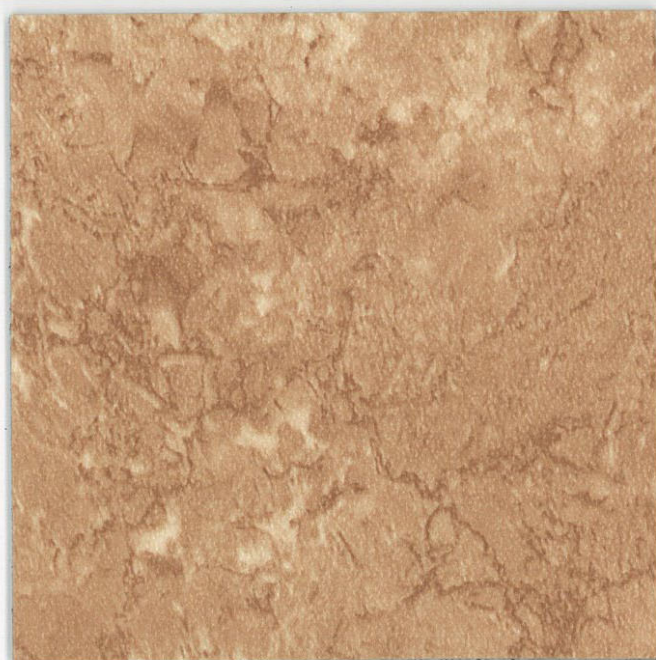


B1679



B1692



B1691

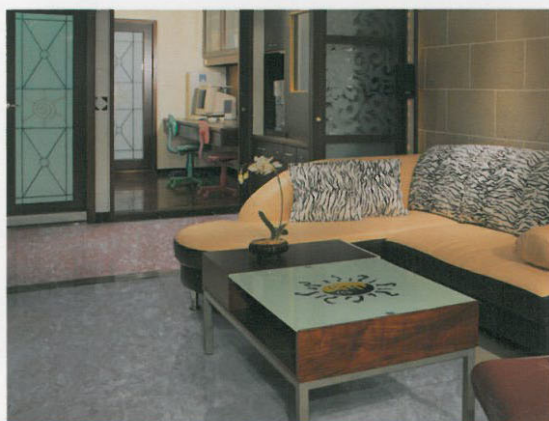

Winton®

Classic Tile 采岩系列


Size : 18"x18"x1.5mm Package: 16pcs/ctn




B1605



B1676

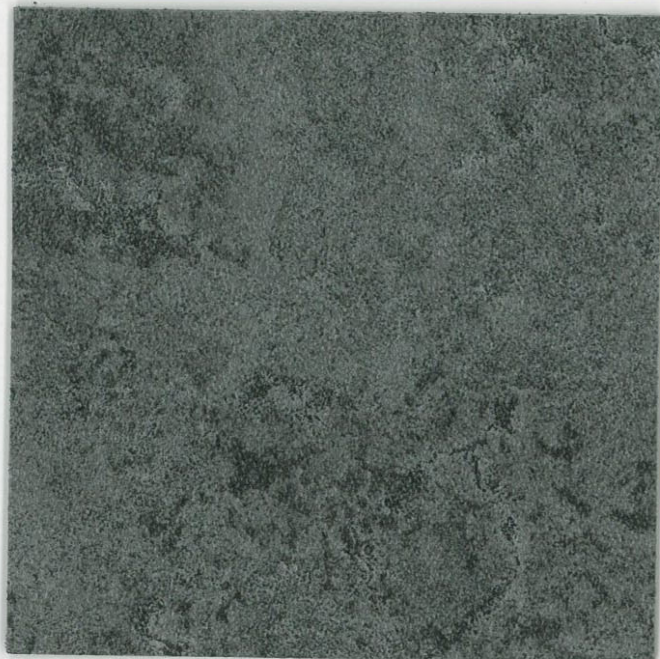

B1615

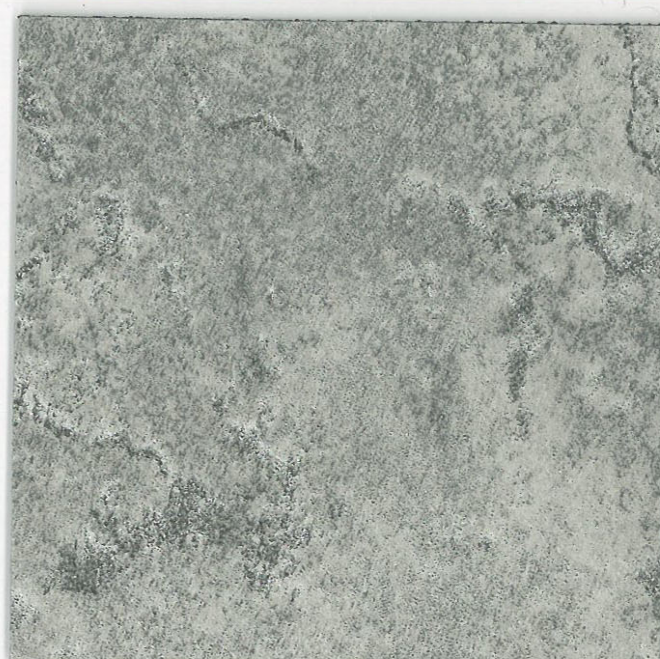

B1616

Winton[®] *Classic Tile* 采岩系列

Size : 18"x18"x1.5mm Package: 16pcs/ctn



B1690



B1603




B1619



B1680




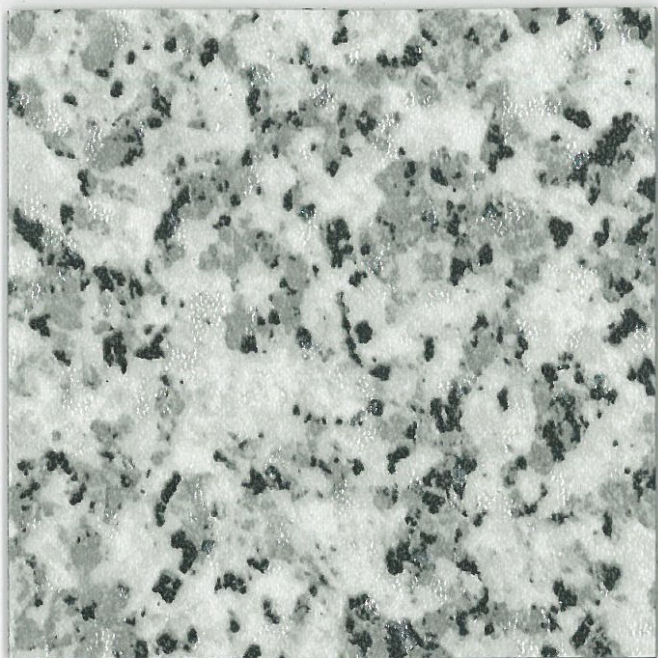


B1617



B1613

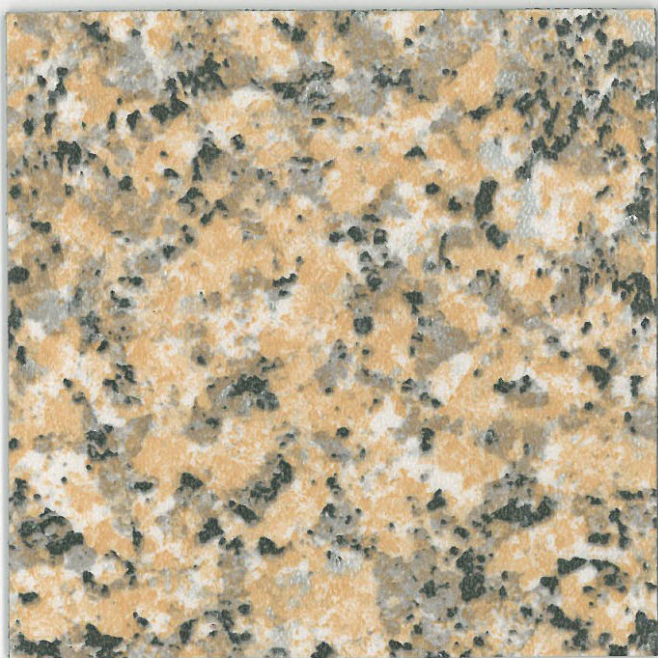

B1618

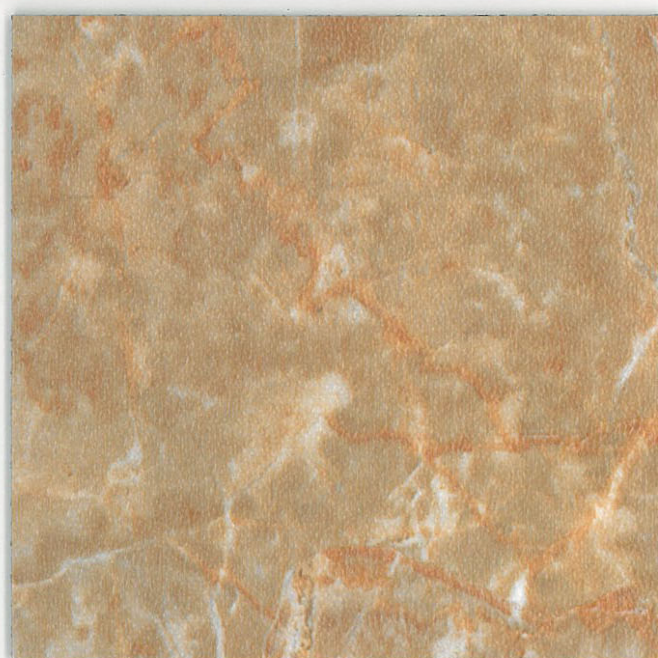

B1673



Winton®



Tile Collection

- 品名: 采岩系列七
- 規格: 18" x 18" x 1.5mm
- 包裝: 16PCS/盒

TEST ITEM	UNIT	METHOD	CONCL
CADMIUM 鎘	ppm	ASTM F963	PASS
LEAD 鉛	ppm	ASTM F963	PASS
MERCURY 汞	ppm	ASTM F963	PASS
ARSENIC 砷	ppm	ASTM F963	PASS
CHROMIUM 鉻	ppm	ASTM F963	PASS
BARIUM 鋇	ppm	ASTM F963	PASS
ANTIMONY 銻	ppm	ASTM F963	PASS
SELENIUM 銻	ppm	ASTM F963	PASS
TOTAL LEAD 總鉛	ppm	USEPA 3052	PASS

財團法人防焰安全中心基金會
FOUNDATION FIRE RETARDANT SAFETY CENTER

委託試驗報告書 正本

98年10月7日
站號字第 T980003 號

此致
允統塑膠工業股份有限公司
台南縣永康市南頂路167號

財團法人防焰安全中心基金會
董事長 洪泰安

98年10月5日所提出之聚氯乙稀地磚試驗，其試驗結果如下：

樣品基本資料		
品名	PVC 塑膠地磚	
材質	PVC、硬質、DUP、DUP、CaCO ₃ 、安定劑(金屬鹽 Zn、Ba、Ca)、滑劑(內、外滑劑)ACOMA	
試驗結果摘要		
試驗序號	燃燒時間(秒)	備註
1	1	1. 參考試驗方法: CNS 8067 A3155; 2. 加熱時間為 12 秒; 3. 用列記離值對照品負責。
2	0	
3	1	
結果判定		
判定合格		
試驗日期	98/10/7	試驗號碼
報告簽署人	王淑貞	試驗操作人員
		許依婷



耐壓




防滑



耐污



證號: TW10/00485



耐藥性



耐燃



耐磨



證號: TW99/00209



Made In Taiwan
臺灣製造