



Product Name: Proximity Reader

Product Type: PR-75CD

Features:

Standard with EM reader, Mifare and HID are optional device

Supports 15,000 Card Capacity

Supports 8,000 History Record

Built-in RTC (Real Time Clock)

With programmable Time Zone and Special Time Schedule functions

Standalone or PC on line through software. The maximum reader range is 255

Built-in tamper switch detects when case is forced open or destroyed, the alarm signal will output

Built-in alarm loop

Built-in Watchdog, the system never hang


Can standalone even PC Shut Down or Off line

Data is protected even after power failure


Configuration :

Power

AC110V IN DC12V 1.5A OUT

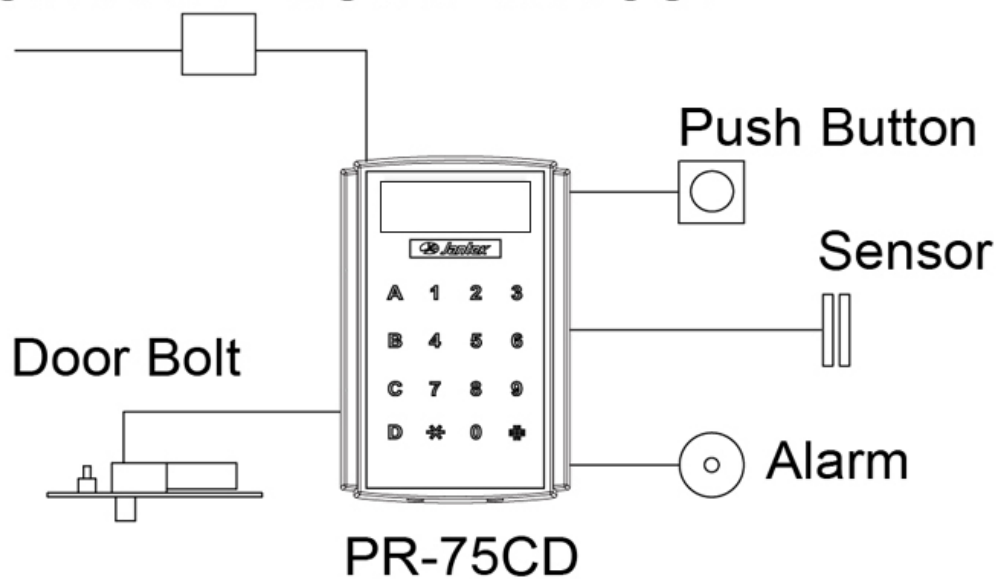

Configuration (RS-232 / RS-485.422) :

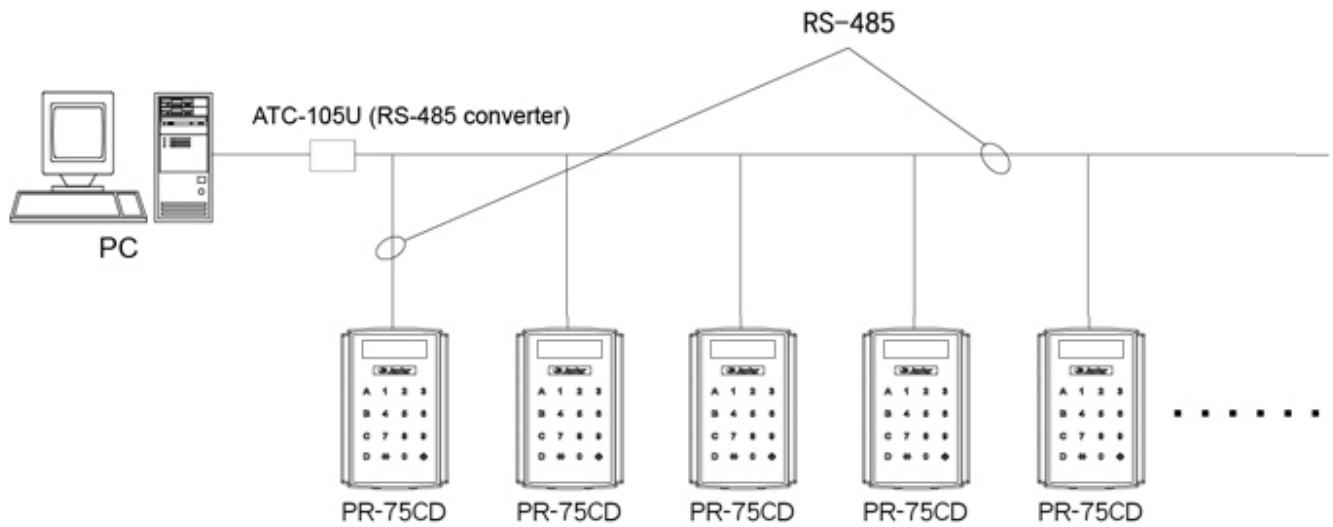

Specifications:

Read Range	Mifare Card: 2cm ~ 5cm, EM Card: 3cm ~ 10cm, HID Card: 3cm ~ 8cm
Display	16 Character * 2 Line Backlit LCD
LED	3 * Red/Green Bio-color LED and 3 * Blue LED
Keypad	4 x 4 16 Keys Touch Keypad (Blue Backlit LED)
Battery	CR2032 3V
Output Point	3 * Relay NO/NC Output Point, 1 * Transistor Output
Input Point	1 * Push button Point, 1 * Alarm Loop
Interface	1 * RS-232 Interface, 1 * RS232/RS-422/485 Interface (Selectable by Jumper)
	Baud Rate: 9600
	1 * Wiegand Input/Output Port (Selectable by Jumper)
Power Requirement	DC 12 V 300mA Max.
Working Environment	Temperature: -5~50°C Humidity: 0~90% RH
Dimension	130(L) × 86(W) × 28(H)mm
Weight	0.157 Kg

Ordering Information:

※ Option :

Reader Pad : BH-75

TCP/IP Module : JTM-200

Reference models:

Taiwan Jantek Electronics., Ltd. www.jantek.com.tw
Add:6F-1, No. 1, Wuquan 1St.Rd.,Xinzhuang District, TEL : 886-2-22991255
New Taipei City 24892,Taiwan, R.O.C.
FAX : 02-2299-1257 / 02-2299-7412 Email : service@jantek.com.tw