




NON-INSULATED PARALLEL & BUTT CONNECTORS

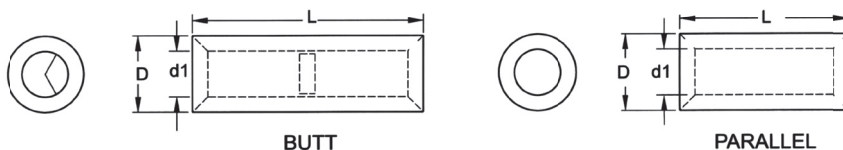

MAXIMUM ELECTRIC CURRENT

A.W.G.	26	24	22	20	18	16	14	12	10	8
AMP	5 5	7	9	12	17	18	30	35	50	70


TERMINAL MATERIAL COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.			DIMENSION ^{inch} mm				CRIMPING TOOL	Q'TY BOX
	PARALLEL	L	BUTT	L	D	d1	T		
26-22 A.W.G. 0.2-0.5 mm ²	PNT0 5	197 5 0	BNT0 5	472 12 0	083 2 1	051 1 3	016 0 4	K S MODEL KSTHT-203 WITH DIE INDEX NO (INSUL)16-22	1000
22-16 A.W.G. 0.5-1.5 mm ²	PNT1	.315 8.0	BNT1	.591 15.0	.130 3.3	.067 1.7	.031 0.8	IZUMI MODEL 5N18 WITH DIE INDEX NO:1.25 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:22-18	1000
			BNT1-16	.630 16.0					
16-14 A.W.G. 1.5-2.5 mm ²	PNT2	315 8 0	BNT2	591 15 0	154 3 9	091 2 3	031 0 8	IZUMI MODEL 5N18 WITH DIE INDEX NO 2 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO 16-14	1000
			BNT2-16	630 16 0					
14-12 A.W.G. 2.5-4 mm ²	PNT3	.335 8.5	BNT3	.591 15.0	.197 5.0	.118 3.0	.039 1.0	IZUMI MODEL 5N18 WITH DIE INDEX NO:5.5 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:12-10	1000
12-10 A.W.G. 4-6 mm ²	PNT5	335 8 5	BNT5	591 15 0	.213 5 4	134 3 4	039 1 0	IZUMI MODEL 5N18 WITH DIE INDEX NO 5 5 OR K S MODEL KST2000D-1322 WITH DIE INDEX NO 12 10	1000
			BNT5-20	787 20 0					1000
8 A.W.G. 8 mm ²	PNT8	.374 9.5	BNT8	.827 21.0	.276 7.0	.181 4.6	.047 1.2	IZUMI MODEL 5N18 12#A WITH DIE INDEX NO:1.8 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:8	1000/500

UL cUL ALL LISTED



NON-INSULATED PARALLEL & BUTT CONNECTORS

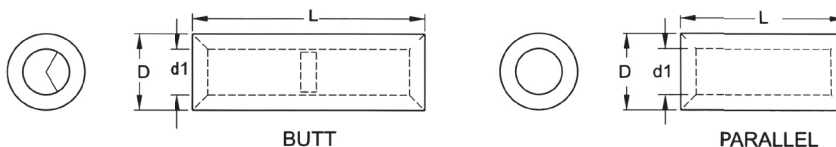

MAXIMUM ELECTRIC CURRENT

A.W.G.	6	4	2	1/0	2/0	3/0	4/0	250	300
AMP	95	125	170	230	265	310	360	405	445


TERMINAL MATERIAL COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.			DIMENSION ^{inch} mm				CRIMPING TOOL	Q'TY BOX
	PARALLEL	L	BUTT	L	D	d1	T		
6 A.W.G 14 mm ²	PNT14	433 11 0	BNT14	1 024 26 0	350 8 9	.232 5 9	.059 1 5	IZUMI MODEL 9H-60 9H-150 12#A WITH DIE INDEX NO 14	500
4 A.W.G. 22 mm ²	PNT22	.531 13.5	BNT22	1.142 29.0	.445 11.3	.307 7.8	.069 1.75	IZUMI MODEL 9H-60 9H-150 12#A WITH DIE INDEX NO:22	250
			BNT22-58	2.283 58.0					
2 A.W.G 38 mm ²	PNT38	650 16 5	BNT38	1 260 32 0	520 13.2	374 9 5	.073 1 85	IZUMI MODEL 9H-60 9H-150 12#A WITH DIE INDEX NO 38	250/200
			BNT38-64	2 520 64 0					
1/0 MCM 60 mm ²	PNT60	.748 19.0	BNT60	1.417 36.0	.602 15.3	.449 11.4	.077 1.95	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO:60	100
			BNT60-72	2.835 72.0					
2/0 MCM 70 mm ²	PNT70	748 19 0	BNT70	1 457 37 0	689 17.5	524 13 3	.083 2 1	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO 70	100
3/0 MCM 80 mm ²	PNT80	.768 19.5	BNT80	1.496 38.0	.768 19.5	.571 14.5	.098 2.5	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO:80	50
			BNT80-76	2.992 76.0					
4/0 MCM 100 mm ²	PNT100	787 20 0	BNT100	1 496 38 0	870 22.1	646 16 4	.112 2 85	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO 100	50
			BNT100-76	2 992 76 0					
250/300 MCM 150 mm ²	PNT150	1.063 27.0	BNT150	2.126 54.0	1.039 26.4	.768 19.5	.136 3.45	IZUMI MODEL 12#A WITH DIE INDEX NO:150	25
			BNT150-108	4.252 108.0					

UL cUL ALL LISTED



NON-INSULATED PARALLEL & BUTT CONNECTORS

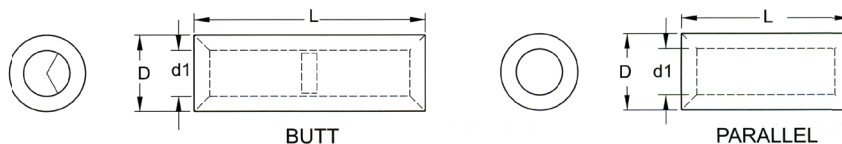

MAXIMUM ELECTRIC CURRENT

A.W.G.	300	350	400	500	600
AMP	445	505	545	620	690

TERMINAL MATERIAL COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.				DIMENSION ^{inch} mm			CRIMPING TOOL	Q'TY BOX
	PARALLEL	L	BUTT	L	D	d1	T		
300/350 MCM 180 mm ²	PNT180	1 122 28 5	BNT180 BNT180-114	2 244 57 0 4 488 114 0	1 122 28 5	827 21 0	148 3 75	IZUMI MODEL 12#A WITH DIE INDEX NO 180	10
400/500 MCM 200 mm ²	PNT200	1.260 32.0	BNT200 BNT200-126	2.480 63.0 4.961 126.0	1.276 32.4	.945 24.0	.165 4.20	IZUMI MODEL 12#A WITH DIE INDEX NO:200	10
500/600 MCM 325 mm ²	PNT325	1 457 37 0	BNT325	2 835 72 0	1 457 37 0	1 102 28 0	177 4 50	IZUMI MODEL 12#A WITH DIE INDEX NO 325	5

UL cUL ALL LISTED