

目錄 CONTENTS

YEUEEN YOUNG ELECTRICAL CO., LTD.



- | | | | | | |
|-----------|--|--|-----------|---|--|
| 03 | Terminal Explanation of Item No.
型號說明 | | 25 | Nylon-Fully Insulated Coupler
with Copper Sleeve
平網尼龍全絕緣加銅套母端子 | |
| 04 | Ring Terminals
圓型端子 | | 26 | Piggy Back Disconnecter / Nylon-Fully
Insulated Flag Terminals
平插網易進式絕緣端子 / 旗型尼龍全絕緣端子 | |
| 07 | Square Terminals
無熔絲開關方型端子 | | 27 | Non-Insulated Cord-End Sleeves
歐式端子 | |
| 08 | Spade Terminals
Y型端子 | | 28 | Cord-End Sleeves
絕緣歐式端子 | |
| 09 | Flag Terminals 旗型端子
Butt Splice 紅銅管中接式套管端子 | | 29 | Cord-End Twin Sleeves
雙線絕緣歐式端子 | |
| 10 | Parallel Splice 紅銅管短式套管端子
Copper Sleeve 歐規中接式套管端子 | | 30 | Wire-Nut Connectors 彈簧式螺旋端子
Soft Vinyl-Cap 軟式絕緣膠套 | |
| 11 | Cable Lugs (CLN / CL type) | | 31 | Open-Barrel Terminals
開放型端子 | |
| 12 | R型銅管高導電端子(有/無檢驗孔) | | 32 | Quick Splice 快速支線夾
Push-In Wire Connectors 插式電線接頭 | |
| 13 | Insulated Ring Terminals
圓型易進式絕緣端子 | | 33 | Wire / Cable Markers
配線標誌 | |
| 14 | Insulated Spade Terminals
Y型易進式絕緣端子 | | 34 | TERMINAL BLOCK
端子台 | |
| 15 | Flanged Spade Terminals Y前彎易進式絕緣端子
Hook Terminals R鉤型易進式絕緣端子 | | 35 | Cable Ties 紮線帶 | |
| 16 | Insulated Pin Terminals 針型易進式絕緣端子
Flat Blade Terminals 扁平型裸端子 | | 36 | Terminal Kits 端子組合 | |
| 17 | Lipped Blade Terminals 扁平前彎型絕緣端子
Butt Splice w/copper tube inside
紅銅板中接式絕緣套管端子 | | 37 | Pneumatic Crimping Tool with
adjustable Positioner
氣動壓著端子鉗 | |
| 18 | Nylon Insulated Butt Splice 尼龍絕緣中接管
Heat Shrinkable Butt Splice 熱收縮中接管 | | 38 | Cable Ferrules Crimping Tool
歐式端子專用壓著鉗 | |
| 19 | Female Disconnecter
平網易進式絕緣母端子 | | 39 | Hand Crimping Tools-Energy
Saving System
強力省力型壓接鉗 | |
| 20 | Non-Insulated Disconnecter
with Copper Sleeve / Male Disconnecter
平插加銅套裸公端子/易進式絕緣公端子 | | 40 | Hand Crimping Tools | |
| 21 | Vinyl Fully Insulated Female
Disconnecter 平網全絕緣母端子 | | 41 | Hand Crimping Tools | |
| 22 | Nylon-Fully Insulated Bullet
Sockets / Bullet Terminals
子彈型全絕緣母端子/易進式絕緣公端子 | | 42 | Hydraulic Crimping Tools 油壓動力式端子鉗 | |
| 23 | Nylon-Fully Insulated Coupler
子彈型尼龍全絕緣母端子 | | 43 | Hydraulic Punch Driver 油壓式沖孔機 | |
| 24 | Nylon-Fully Insulated Coupler
平網尼龍全絕緣母端子 | | 44 | Wire Stripper 剝線鉗
Cable Stripper 電纜剝皮鉗 | |
| | | | 45 | Hand Cutter
各式裁剪鉗 | |
| | | | 46 | Tie Gun 紮線槍
Crimping Tools 多功能端子鉗 | |




YEJEN YOUNG ELECTRICAL CO., LTD.

Your Best Choice


Funnel Terminal




COPPER PLATE THICKNESS 銅板厚度表



ITEM	AWG	DINmm ²	φ d1	T / mm	ITEM	AWG	DINmm ²	φ d1	T / mm	ITEM	AWG	DINmm ²	φ d1	T / mm
0.5	26-22	0.14-0.36	1.0	0.5±0.1	14	6	16	5.8	1.5±0.1	100	4/0	120	16.4	2.6±0.2
1.25	22-18	0.5-1.0	1.7	0.8±0.1	22	4	25	7.7	1.8±0.15	125	250 mcm	120	18.0	2.8±0.2
2	16-14	1.5-2.5	2.3	0.8±0.1	38	2	35	9.4	1.8±0.15	150	250-300 mcm	150	19.5	3.2±0.2
3.5	14-12	2.5-4	3	1.0±0.1	60	1/0	50	11.4	2.0±0.15	180	350-400 mcm	185	21	3.5±0.2
5.5	12-10	4-6	3.4	1.0±0.1	70	2/0	70	13.3	2.0±0.15	200	400-450 mcm	240	24	4.0±0.2
8	8	10	4.5	1.2±0.1	80	3/0	95	14.5	2.3±0.15	325	500-600 mcm	300	28	4.5±0.2

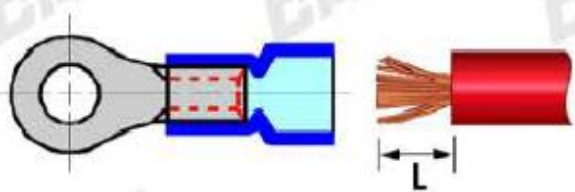

STRIP LENGTH 剝線長度說明

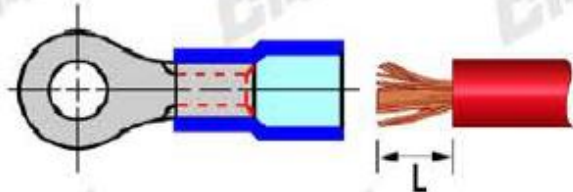


易進式絕緣套 Easy-Entry Product			
ITEM	AWG	DINmm ²	L
1.25	22-18	0.5-1.0	7mm
2	16-14	1.5-2.5	7mm
3.5	14-12	2.5-4	8.5mm
5.5	12-10	4-6	9mm

一般絕緣套 General Product			
ITEM	AWG	DINmm ²	L
1.25	22-18	0.5-1.0	5mm
2	16-14	1.5-2.5	5mm
3.5	14-12	2.5-4	6.5mm
5.5	12-10	4-6	7mm
8	8	10	9mm
14	6	16	11mm
22	4	25	13mm
38	2	35	15mm

型號說明

Terminals Explanation Of Item No.

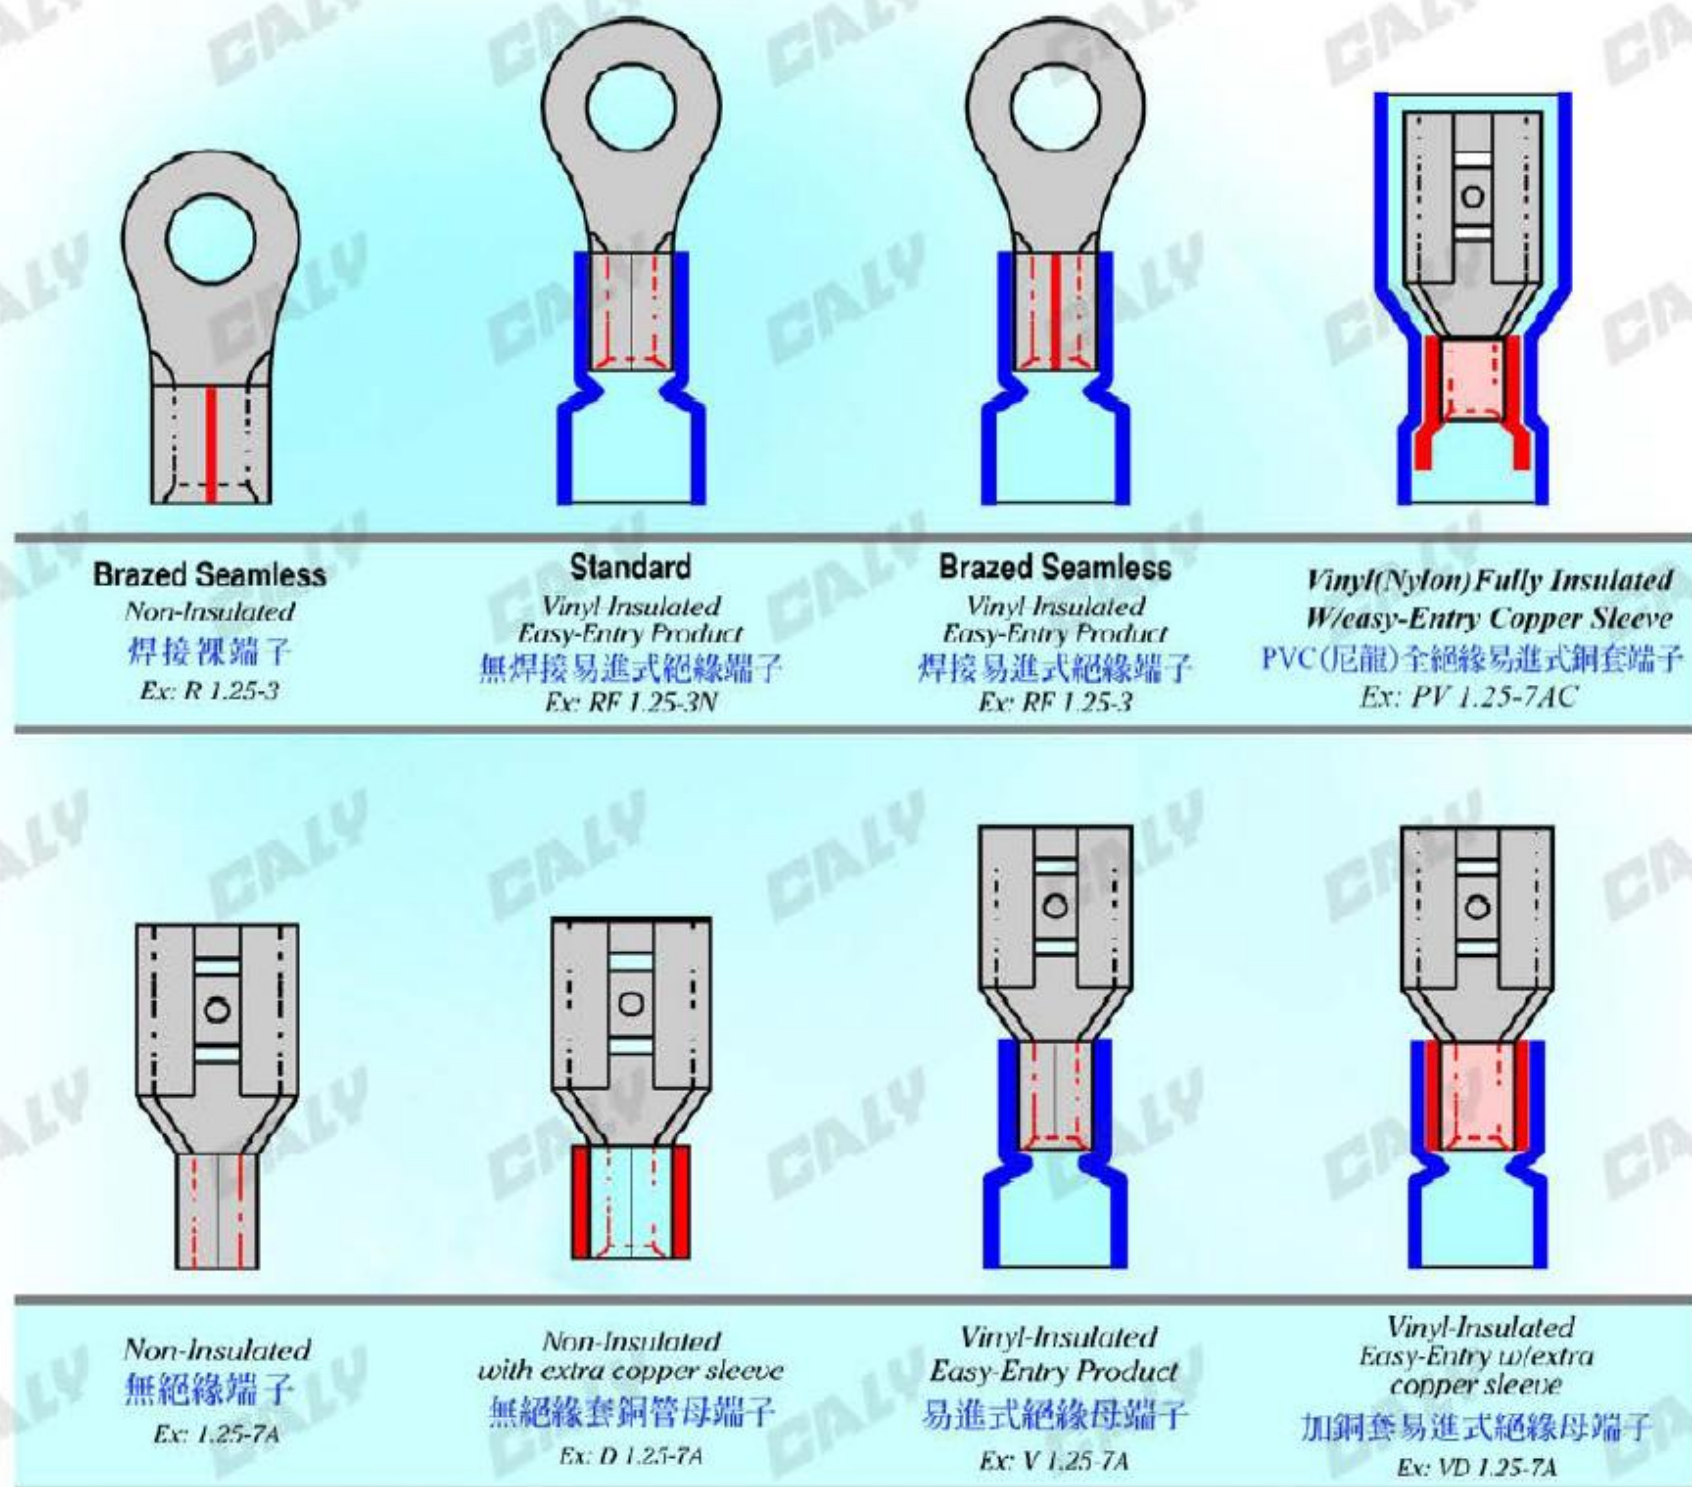


GENERAL INSULATED


FUNNEL VINYL INSULATED

easy-entry product

一般舊式絕緣端子

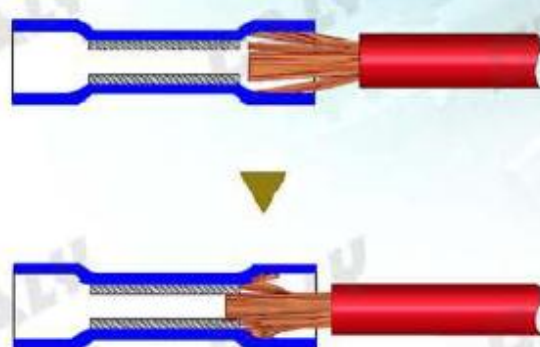


易進式絕緣端子

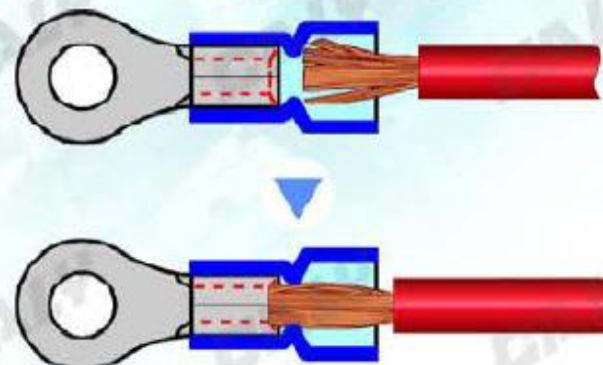

圓型端子

Ring Terminals

(R-type:Non-Insulated)

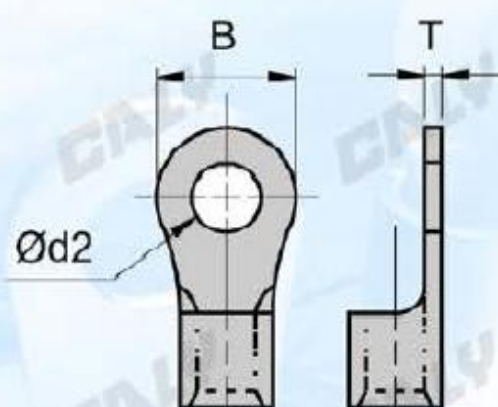

Unit:mm


ITEM NO.	φ d2	B	T	AWG	DINmm ²
R0.5-2	2.2	5.2			
R0.5-3	3.2	5.2	0.5	26-22	0.14-0.36
R0.5-4	4.3	6.6			
R0.5-5	5.3	8.0			
R1.25-3S	3.2	5.5			
R1.25-3	3.7	5.5			
R1.25-3M	3.7	6.6			
R1.25-4M	4.3	6.6			
R1.25-4	4.3	8.0	0.8	22-18	0.5-1.0
R1.25-5	5.3	8.0			
R1.25-6	6.4	11.6			
R1.25-8	8.4	11.6			
R1.25-10	10.5	13.6			
R1.25-12	13.0	19.0			
R2-3S	3.2	5.5			
R2-3	3.7	8.5			
R2-3M	3.7	6.6			
R2-4M	4.3	6.6			
R2-4	4.3	8.5	0.8	16-14	1.5-2.5
R2-5	5.3	9.5			
R2-6	6.4	11.6			
R2-8	8.4	11.6			
R2-10	10.5	13.6			
R2-12	13.0	19.0			
R3.5-3S	3.7	7.0			
R3.5-4S	4.3	7.0			
R3.5-4	4.3	8.0			
R3.5-5	5.3	8.0	1.0	14-12	2.5-4
R3.5-6	6.4	12.0			
R3.5-8	8.4	15.0			
R3.5-10	10.5	15.0			
R3.5-12	13.0	19.0			
R5.5-3S	3.7	7.2			
R5.5-4S	4.3	7.2	1.0	12-10	4-6
R5.5-4	4.3	9.5			
R5.5-5	5.3	9.5			

ITEM NO.	φ d2	B	T	AWG	DINmm ²
R5.5-6	6.4	12.0			
R5.5-8	8.4	15.0	1.0	12-10	4-6
R5.5-10	10.5	15.0			
R5.5-12	13.0	19.0			
R8-4NK	4.3	9.0			
R8-5NK	5.3	9.0			
R8-4S	4.3	9.0			
R8-4	4.3	12.0			
R8-5S	5.3	9.0			
R8-5	5.3	12.0			
R8-6	6.4	12.0	1.2	8	10
R8-6L	6.4	15.0			
R8-8	8.4	15.0			
R8-10	10.5	15.0			
R8-12	13.0	19.0			
R8-14	15.0	30.0			
R8-16	17.0	30.0			
R8-20	21.0	30.0			
R14-4	4.3	12.0			
R14-5S	5.3	9.5			
R14-5	5.3	12.0			
R14-6	6.4	12.0			
R14-8	8.4	16.0			
R14-10	10.5	16.0	1.5	6	16
R14-11	11.5	22.0			
R14-12	13.0	22.0			
R14-14	15.0	30.0			
R14-16	17.0	30.0			
R14-20	21.0	30.0			
R22-5S	5.3	12.0			
R22-6S	6.4	12.0			
R22-8S	8.4	12.0			
R22-5	5.3	16.5	1.8	4	25
R22-6	6.4	16.5			
R22-8	8.4	16.5			
R22-10S	10.5	16.5			

圓型端子

Ring Terminals

(R-type:Non-Insulated)

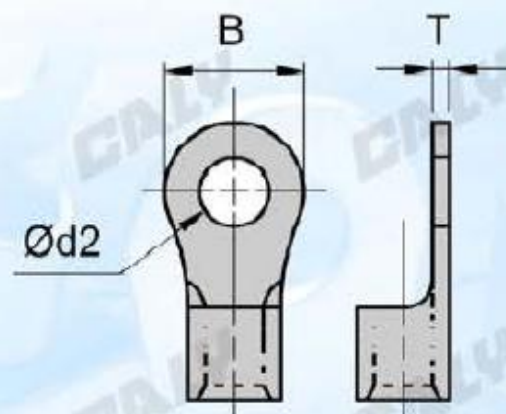

Unit:mm


ITEM NO.	φ d2	B	T	AWG	DINmm ²
R22-10	10.5	17.5			
R22-12	13.0	22.0			
R22-14	15.0	30.0	1.8	4	25
R22-16	17.0	30.0			
R22-18	19.0	30.0			
R22-20	21.0	30.0			
R38-5S	5.3	15.3			
R38-6S	6.4	15.3			
R38-8S	8.4	15.3			
R38-10S	10.5	15.3			
R38-6	6.4	22.0			
R38-8	8.4	22.0	1.8	2	35
R38-10	10.5	22.0			
R38-12	13.0	22.0			
R38-14	15.0	30.0			
R38-16	17.0	30.0			
R38-18	19.0	30.0			
R38-20	21.0	30.0			
R60-6	6.4				
R60-8	8.4				
R60-10	10.5	22.0	2.0	1/0	50
R60-11	11.5				
R60-12	13.0				
R60-14	15.0				
R60-16	17.0				
R60-18	19.0	32.0	2.0	1/0	50
R60-20	21.0				
R60-22	23.0				
R70-6	6.4				
R70-8	8.4				
R70-10	10.5	24.0	2.0	2/0	70
R70-11	11.5				
R70-12	13.0				
R70-14	15.0				
R70-16	17.0	32.0	2.0	2/0	70
R70-18	19.0				

ITEM NO.	φ d2	B	T	AWG	DINmm ²
R70-20	21.0	32.0	2.0	2/0	70
R70-22	23.0				
R80-6	6.4				
R80-8	8.4	27.0	2.3	3/0	95
R80-10	10.5				
R80-12	13.0				
R80-8L	8.4				
R80-10L	10.5				
R80-12L	13.0				
R80-14	15.0	32.0	2.3	3/0	95
R80-16	17.0				
R80-18	19.0				
R80-20	21.0				
R80-22	23.0				
R100-6	6.4				
R100-8	8.4				
R100-10	10.5	28.5	2.6	4/0	120
R100-11	11.5				
R100-12	13.0				
R100-8L	8.4				
R100-10L	10.5				
R100-12L	13.0				
R100-14	15.0	32.0	2.6	4/0	120
R100-16	17.0				
R100-18	19.0				
R100-20	21.0				
R100-22	23.0				
R150-6	6.4				
R150-8	8.4				
R150-10	10.5				
R150-12	13.0	36.0	3.2	250-300	150
R150-14	15.0			mcm	
R150-16	17.0				
R150-8L	8.4				
R150-10L	10.5				
R150-12L	13.0				

圓型端子

Ring Terminals

(R-type:Non-Insulated)

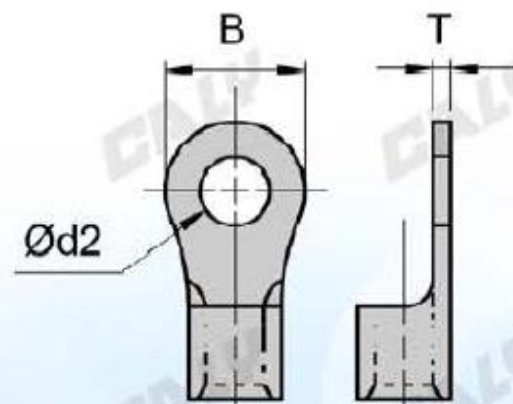


Unit:mm

ITEM NO.	φ d2	B	T	AWG	DINmm ²
R150-16L	17.0				
R150-18	19.0				
R150-20	21.0	36.0	3.2	250-300	150
R150-22	23.0				mcm
R150-24	25.0				
R180-8	8.4				
R180-10	10.5				
R180-12	13.0				
R180-14	15.0				
R180-16	17.0				
R180-8L	8.4				
R180-10L	10.5	38.5	3.5	300-350	185
R180-12L	13.0				mcm
R180-16L	17.0				
R180-18	19.0				
R180-20	21.0				
R180-22	23.0				
R180-24	25.0				
R180-27	28.0				
R200-8	8.4				
R200-10	10.5				
R200-11	11.5				
R200-12	13.0				
R200-14	15.0				
R200-16	17.0				
R200-8L	8.4				
R200-10L	10.5	44.0	4.0	400-450	240
R200-12L	13.0				mcm
R200-14L	15.0				
R200-16L	17.0				
R200-18	19.0				
R200-20	21.0				
R200-22	23.0				
R200-24	25.0				
R200-27	28.0				

ITEM NO.	φ d2	B	T	AWG	DINmm ²
R325-8	8.4				
R325-10	10.5				
R325-12	13.0				
R325-14	15.0				
R325-16	17.0				
R325-8L	8.4				
R325-10L	10.5	50.0	4.5	500-600	300
R325-12L	13.0				mcm
R325-14L	15.0				
R325-16L	17.0				
R325-18	19.0				
R325-20	21.0				
R325-22	23.0				
R325-24	25.0				
R325-27	28.0				

無熔絲開關方型端子

Square Terminals

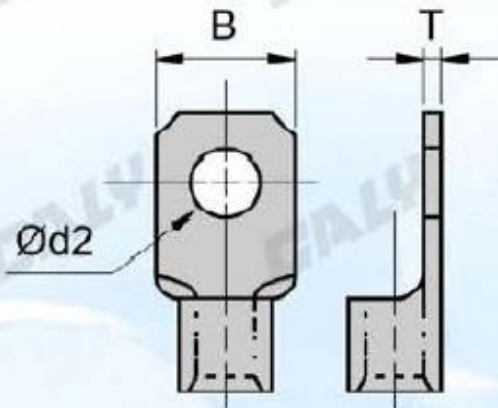


Unit:mm

ITEM NO.	Ød2	B	T	AWG	DINmm ²
CB 38-5T	5.3	12.0			
CB 38-6T	6.4	12.0			
CB 38-6S	6.4	13.5	1.8	2	35
CB 38-8S	8.4	13.5			
CB 38-8	8.4	16.0			
CB 38-10	10.5	16.0			
CB 60-8	8.4	16.0	2.0	1/0	50
CB 60-10	10.5				
CB 80-8	8.4				
CB 80-10	10.5	21.0	2.3	3/0	95
CB 80-12	13.0				
CB 100-8	8.4				
CB 100-10	10.5	22.0	2.6	4/0	120
CB 100-12	13.0				
CB 125-8	8.4				
CB 125-10	10.5	22.0	2.8	250mcm	120
CB 125-12	13.0				
CB 150-8S	8.4				
CB 150-10S	10.5	22.0	3.2	250-300 mcm	150
CB 150-12S	13.0				
CB 150-8	8.4				
CB 150-10	10.5	27.0	3.2	250-300 mcm	150
CB 150-12	13.0				
CB 180-10	10.5				
CB 180-12	13.0	28.5	3.5	300-350 mcm	185
CB 180-16	17.0				
CB 200-10	10.5				
CB 200-12	13.0	33.0	4.0	400-450 mcm	240
CB 200-16	17.0				
CB 325-12	13.0				
CB 325-16	17.0	37.0	4.5	500-600 mcm	300
CB 325-18	19.0				
CB 325-20	21.0				

Y型端子

Spade Terminals

(Y-type:Non-Insulated)

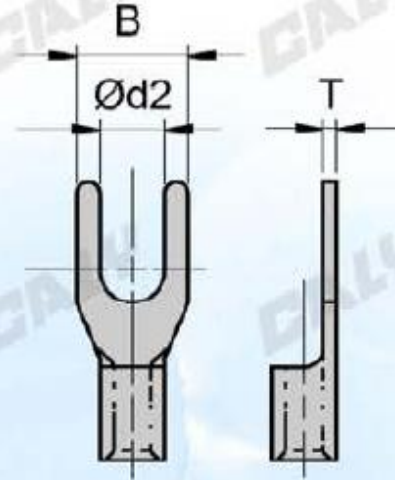


Unit:mm

ITEM NO.	φ d2	B	T	AWG	DINmm ²
Y 1.25-3S	3.7	5.7			
Y 1.25-3	3.7	6.2			
Y 1.25-4S	4.3	6.4	0.8	22-18	0.5-1.0
Y 1.25-4	4.3	7.2			
Y 1.25-5	5.3	8.0			
Y 1.25-6	6.4	10.7			
Y 2-3S	3.7	5.7			
Y 2-3	3.7	6.2			
Y 2-4S	4.3	6.4	0.8	16-14	1.5-2.5
Y 2-4	4.3	7.2			
Y 2-5	5.3	8.0			
Y 2-6	6.4	10.7			
Y 3.5-3S	3.7	6.4			
Y 3.5-3	3.7	7.4			
Y 3.5-4S	4.3	7.0	1.0	14-12	2.5-4.0
Y 3.5-4	4.3	8.0			
Y 3.5-5	5.3	8.0			
Y 3.5-6	6.4	10.8			
Y 5.5-3S	3.7	7.2			
Y 5.5-3	3.7	8.2			
Y 5.5-4S	4.3	7.2	1.0	12-10	4.0-6.0
Y 5.5-4	4.3	8.2			
Y 5.5-5	5.3	9.0			
Y 5.5-6	6.4	10.8			
Y 8-4	4.3	8.2			
Y 8-5	5.3	9.0	1.2	8	10
Y 8-6	6.4	12.0			
Y 14-4	4.3	9.1			
Y 14-5	5.3	12.0	1.5	6	16
Y 14-6	6.4	12.0			
Y 22-4S	4.3	9.1			
Y 22-4	4.3	12.0			
Y 22-5	5.3	12.0	1.8	4	25
Y 22-6	6.4	13.0			
Y 22-8	8.4	15.0			

旗型端子

Flag Terminals

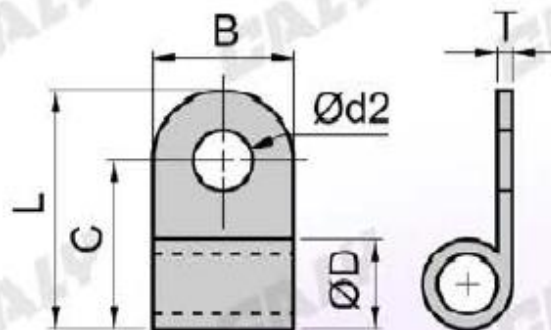


Unit:mm

ITEM NO.	L	B	C	φ D	φ d2	T	AWG
FG1.25-5	16.2	9.6	11.4	3.3	5.3	0.8	22-18
FG2-5	16.2	9.6	11.4	4.0	5.3	0.8	16-14
FG2-6					6.4		
FG5.5-5	17.7	9.6	13.2	5.5	5.3	1.0	12-10
FG5.5-6					6.4		
FG8-5	23.1	12.7	16.7		5.3		
FG8-6	23.1	12.7	16.7	7.1	6.4	1.2	8
FG8-8	28.7	15.5	20.5		8.4		
FG14-5	24.9	12.7	18.5		5.3		
FG14-6	24.9	12.7	18.5	9.0	6.4	1.5	6
FG14-8	30.5	16.0	22.6		8.4		
FG22-5	28.2	14.0	21.0		5.3		
FG22-6	28.2	14.0	21.0	11.4	6.4	1.8	4
FG22-8	34.0	17.5	24.9		8.4		
FG22-10	34.0	17.5	24.9		10.5		
FG38-6					6.4		
FG38-8	36.0	18.3	26.6	13.3	8.4	1.8	2
FG38-10					10.5		
FG60-6					6.4		
FG60-8	43.9	22.3	33.0	15.4	8.4	2.0	1/0
FG60-10					10.5		
FG70-8					8.4		
FG70-10	46.7	23.9	35.0	17.5	10.5	2.0	2/0
FG70-12					13.0		
FG80-10	50.8	27.0	37.0	19.4	10.5	2.3	3/0
FG80-12					13.0		
FG100-10	53.0	28.5	38.7	22.0	10.5	2.6	4/0
FG100-12					13.0		

紅銅管中接式套管端子

Butt Splice (B type)

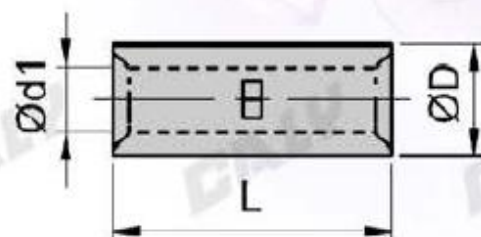


Unit:mm

ITEM NO.	φ d1	φ D	L	AWG	DINmm ²
B 1.25	1.8	3.3	15	22-18	0.5-1.0
B 2	2.4	4.0	15	16-14	1.5-2.5
B 5.5	3.6	5.5	15	12-10	4-6
B 8	4.5	7.1	21	8	10
B 14	5.8	9.0	26	6	16
B 22	7.7	11.4	29	4	25
B 38	9.4	13.3	32	2	35
B 60	11.4	15.4	36	1/0	50
B 70	13.3	17.5	37	2/0	70
B 80	14.5	19.4	38	3/0	95
B 100	16.4	22.0	38	4/0	120
B 150	19.5	26.5	54	250-300mcm	150
B 180	21.0	28.5	57	300-350mcm	185
B 200	24.0	32.5	63	400-450mcm	240
B 325	28.0	37.0	72	500-600mcm	300

紅銅管短式套管端子


Parallel Splice (P type)

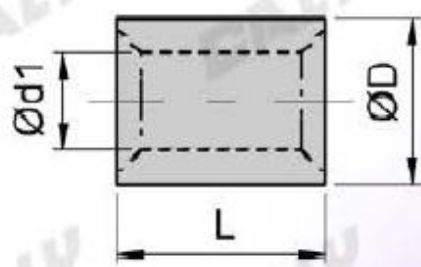

ITEM NO.	φ d1	φ D	L	AWG	Unit:mm	
					DINmm ²	
P 1.25	1.8	3.3	8	22-18	0.5-1.0	
P 2	2.4	4.0	8	16-14	1.5-2.5	
P 5.5	3.6	5.5	8.5	12-10	4-6	
P 8	4.5	7.1	9.5	8	10	
P 14	5.8	9.0	11	6	16	
P 22	7.7	11.4	13.5	4	25	
P 38	9.4	13.3	16.5	2	35	
P 60	11.4	15.4	18.5	1/0	50	
P 70	13.3	17.5	19	2/0	70	
P 80	14.5	19.4	19.5	3/0	95	
P 100	16.4	22.0	20	4/0	120	
P 150	19.5	26.5	27	250-300mcm	150	
P 180	21.0	28.5	28.5	350-400mcm	185	
P 200	24.0	32.5	32	400-450mcm	240	
P 325	28.0	37.0	37	500-600mcm	300	

歐規中接式套管端子

Copper Sleeve (CS type)

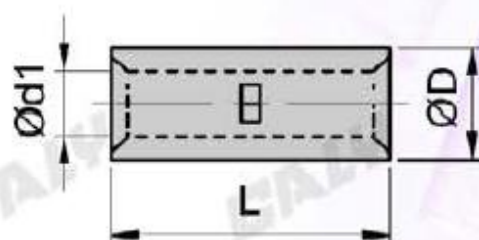


ITEM NO.	φ d1	φ D	L	AWG	Unit:mm	
					DINmm ²	
CS 1.5	1.9	3.4	12	18-16	1.5	
CS 2.5	2.4	3.9	13	16-14	2.5	
CS 4	2.8	4.5	15	12-10	4	
CS 6	3.8	5.5	15	8	6	
CS 10	4.5	6.2	20	6	10	
CS 16	5.4	7.1	20	4	16	
CS 25	6.8	8.8	28	2	25	
CS 35	8.2	10.6	32	1/0	35	
CS 50	9.5	12.4	35	2/0	50	
CS 70	11.2	14.7	38	3/0	70	
CS 95	13.5	17.4	42	4/0	95	
CS 120	15.0	19.4	45	250-300mcm	120	
CS 150	16.5	21.2	53	300-350mcm	150	
CS 185	18.5	23.5	62	350-400mcm	185	
CS 240	21.0	26.5	72	400-450mcm	240	
CS 300	23.5	30.0	78	500-600mcm	300	
CS 400	28.5	36.5	84	600-750mcm	400	
CS 500	30.0	39.0	94	800-1000mcm	500	
CS 625	34.5	44.0	102	1000-1250mcm	630	
CS 800	40.0	51.2	106		800	
CS 1000	44.0	56.6	120		1000	

R型銅管高導電端子

Cable Lugs (General size) (CL type)

(w / lookout window) (有檢驗孔)

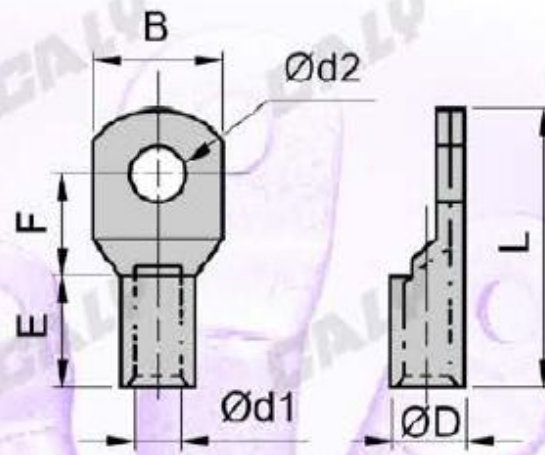

Unit:mm

ITEM NO.	Ød2	Ød1	ØD	B	E	F	L	DINmm ²
CL 2.5-4	4.3			8.0			18	
CL 2.5-5	5.3	2.4	3.9	8.0	7	7	18	2.5
CL 2.5-6	6.4			10.0			19	
CL 4-5	5.3	2.8	4.5	10.0	7	8	20	4
CL 4-6	6.4							
CL 6-5	5.3			10.0			23	
CL 6-6	6.4	3.8	5.5	10.0	9	9	23	6
CL 6-8	8.4			12.6			25	
CL 10-5	5.3			10.0			25	
CL 10-6	6.4	4.5	6.2	10.0	9	10	25	10
CL 10-8	8.4			12.6			26	
CL 16-5	5.3			10.0				
CL 16-6	6.4			10.0				
CL 16-8	8.4	5.4	7.1	12.6	12	11	30	16
CL 16-10	10.5			12.6				
CL 25-6	6.4			12.6		11	30	
CL 25-8	8.4	6.8	8.8	12.6	12	11	30	25
CL 25-10	10.5			15.0		12.5	32	
CL 35-6	6.4			15.0	13		35	
CL 35-8	8.4	8.2	10.6	15.0	13	14	35	35
CL 35-10	10.5			15.0	13		35	
CL 35-12	13.0			18.6	12		36.8	
CL 50-8	8.4			18.0				
CL 50-10	10.5	9.5	12.4	18.0	16	17	43	50
CL 50-12	13.0			19.0				
CL 70-8	8.4							
CL 70-10	10.5	11.2	14.7	21.0	18	20	50	70
CL 70-12	13.0							
CL 95-8	8.4							
CL 95-10	10.5	13.5	17.4	25.5	20	22	55	95
CL 95-12	13.0							
CL 120-10	10.5							
CL 120-12	13.0	15.0	19.4	28.0	22	24	60	120
CL 120-14	15.0							
CL 120-16	17.0							


Unit:mm

ITEM NO.	Ød2	Ød1	ØD	B	E	F	L	DINmm ²
CL 150-8	8.4							
CL 150-10	10.5							
CL 150-12	13.0	16.5	21.2	30.5	26	27	69	150
CL 150-14	15.0							
CL 150-16	17.0							
CL 185-8	8.4							
CL 185-10	10.5							
CL 185-12	13.0	18.5	23.5	34.0	32	29	78	185
CL 185-14	15.0							
CL 185-16	17.0							
CL 240-12	13.0							
CL 240-14	15.0	21.0	26.5	38.5	38	34	92	240
CL 240-16	17.0							
CL 240-18	19.0							
CL 300-12	13.0							
CL 300-14	15.0	23.5	30.0	43.5	42	37	101	300
CL 300-16	17.0							
CL 300-18	19.0							
CL 400-12	13.0							
CL 400-16	17.0	28.5	36.5	53.0	44	44	114	400
CL 400-18	19.0							
CL 400-20	21.0							
CL 500-16	17.0							
CL 500-18	19.0	30.0	39.0	56.0	48	48	124	500
CL 500-20	21.0							
CL 625-16	17.0							
CL 625-18	19.0	34.5	44.0	63.5	52	51	130	625
CL 625-20	21.0							
CL 800-16	17.0							
CL 800-18	19.0	40.0	51.2	74.0	54	56	140	800
CL 800-20	21.0							
CL 1000-16	17.0							
CL 1000-18	19.0	44.0	56.6	81.5	60	56	146	1000
CL 1000-20	21.0							

R型銅管高導電端子

Cable Lugs (General size) (CLN type)

(w/o lookout window) (無檢驗孔)

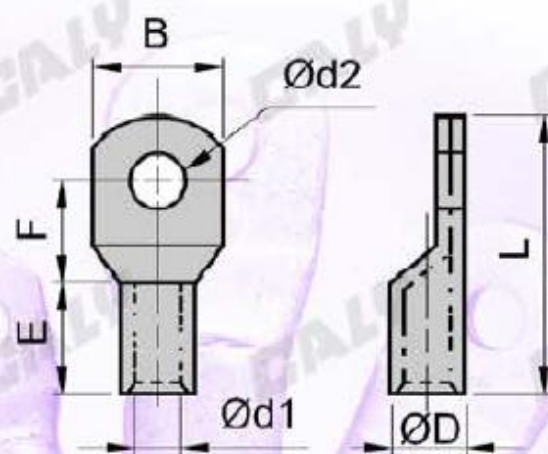



Unit:mm								
ITEM NO.	φd2	φd1	φD	B	E	F	L	DINmm ²
CL 2.5-4N	4.3			8.0			18	
CL 2.5-5N	5.3	2.4	3.9	8.0	7	7	18	2.5
CL 2.5-6N	6.4			10.0			19	
CL 4-5N	5.3	2.8	4.5	10.0	7	8	20	4
CL 4-6N	6.4							
CL 6-5N	5.3			10.0			23	
CL 6-6N	6.4	3.8	5.5	10.0	9	9	23	6
CL 6-8N	8.4			12.6			25	
CL 10-5N	5.3			10.0			25	
CL 10-6N	6.4	4.5	6.2	10.0	9	10	25	10
CL 10-8N	8.4			12.6			26	
CL 16-5N	5.3			10.0				
CL 16-6N	6.4			10.0				
CL 16-8N	8.4	5.4	7.1	12.6	12	11	30	16
CL 16-10N	10.5			12.6				
CL 25-6N	6.4			12.6		11	30	
CL 25-8N	8.4	6.8	8.8	12.6	12	11	30	25
CL 25-10N	10.5			15.0		12.5	32	
CL 35-6N	6.4			15.0	13		35	
CL 35-8N	8.4	8.2	10.6	15.0	13	14	35	35
CL 35-10N	10.5			15.0	13		35	
CL 35-12N	13.0			18.6	12		36.8	
CL 50-8N	8.4			18.0				
CL 50-10N	10.5	9.5	12.4	18.0	16	17	43	50
CL 50-12N	13.0			19.0				
CL 70-8N	8.4							
CL 70-10N	10.5	11.2	14.7	21.0	18	20	50	70
CL 70-12N	13.0							
CL 95-8N	8.4							
CL 95-10N	10.5	13.5	17.4	25.5	20	22	55	95
CL 95-12N	13.0							
CL 120-10N	10.5							
CL 120-12N	13.0	15.0	19.4	28.0	22	24	60	120
CL 120-14N	15.0							
CL 120-16N	17.0							

Unit:mm								
ITEM NO.	φd2	φd1	φD	B	E	F	L	DINmm ²
CL 150-8N	8.4							
CL 150-10N	10.5							
CL 150-12N	13.0	16.5	21.2	30.5	26	27	69	150
CL 150-14N	15.0							
CL 150-16N	17.0							
CL 185-8N	8.4							
CL 185-10N	10.5							
CL 185-12N	13.0	18.5	23.5	34.0	32	29	78	185
CL 185-14N	15.0							
CL 185-16N	17.0							
CL 240-12N	13.0							
CL 240-14N	15.0	21.0	26.5	38.5	38	34	92	240
CL 240-16N	17.0							
CL 240-18N	19.0							
CL 300-12N	13.0							
CL 300-14N	15.0	23.5	30.0	43.5	42	37	101	300
CL 300-16N	17.0							
CL 300-18N	19.0							
CL 400-12N	13.0							
CL 400-16N	17.0	28.5	36.5	53.0	44	44	114	400
CL 400-18N	19.0							
CL 400-20N	21.0							
CL 500-16N	17.0							
CL 500-18N	19.0	30.0	39.0	56.0	48	48	124	500
CL 500-20N	21.0							
CL 625-16N	17.0							
CL 625-18N	19.0	34.5	44.0	63.5	52	51	130	625
CL 625-20N	21.0							
CL 800-16N	17.0							
CL 800-18N	19.0	40.0	51.2	74.0	54	56	140	800
CL 800-20N	21.0							
CL 1000-16N	17.0							
CL 1000-18N	19.0	44.0	56.6	81.5	60	56	146	1000
CL 1000-20N	21.0							

圓型易進式絕緣端子

Insulated Ring Terminals

(easy-entry product)

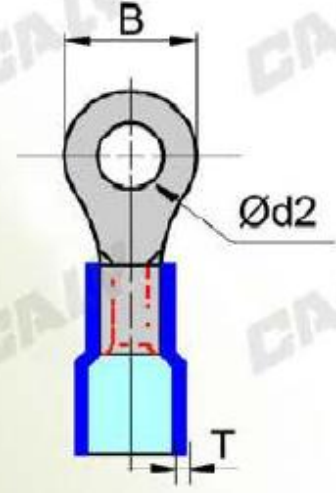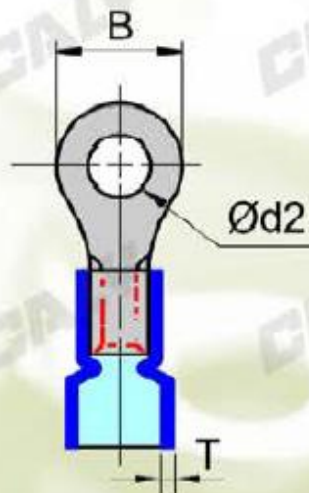

(general) Insulated Ring Terminals

圓型絕緣端子


Unit:mm					
ITEM NO.	φ d2	B	T	AWG	DINmm ²
● RF 1.25-3S	3.2	5.5			
RF 1.25-3	3.7	5.5			
RF 1.25-3M	3.7	6.6			
RF 1.25-4M	4.3	6.6			
RF 1.25-4	4.3	8.0	0.8	22-18	0.5-1.0
RF 1.25-5	5.3	8.0			
RF 1.25-6	6.4	11.6			
RF 1.25-8	8.4	11.6			
RF 1.25-10	10.5	13.6			
RF 1.25-12	13.0	19.0			
● RF 2-3S	3.2	5.5			
RF 2-3	3.7	8.5			
RF 2-3M	3.7	6.6			
RF 2-4M	4.3	6.6			
RF 2-4	4.3	8.5	0.8	16-14	1.5-2.5
RF 2-5	5.3	9.5			
RF 2-6	6.4	11.6			
RF 2-8	8.4	11.6			
RF 2-10	10.5	13.6			
RF 2-12	13.0	19.0			
● RF 3.5-3S	3.7	7.0			
RF 3.5-4S	4.3	7.0			
RF 3.5-4	4.3	8.0			
RF 3.5-5	5.3	8.0	0.8	14-12	2.5-4
RF 3.5-6	6.4	12.0			
RF 3.5-8	8.4	15.0			
RF 3.5-10	10.5	15.0			
RF 3.5-12	13.0	19.0			
● RF 5.5-3S	3.7	7.2			
RF 5.5-4S	4.3	7.2			
RF 5.5-4	4.3	9.5			
RF 5.5-5	5.3	9.5	0.8	12-10	4-6
RF 5.5-6	6.4	12.0			
RF 5.5-8	8.4	15.0			
RF 5.5-10	10.5	15.0			
RF 5.5-12	13.0	19.0			

Unit:mm					
ITEM NO.	φ d2	B	T	AWG	DINmm ²
● RF 8-4S	4.3	9.0			
RF 8-4	4.3	12.0			
RF 8-5S	5.3	9.0			
RF 8-5	5.3	12.0	1.0	8	10
RF 8-6	6.4	12.0			
RF 8-8	8.4	15.0			
RF 8-10	10.5	15.0			
RF 8-12	13.0	19.0			
● RF 14-4	4.3	12.0			
RF 14-5	5.3	12.0			
RF 14-6	6.4	12.0			
RF 14-8	8.4	16.0	1.2	6	16
RF 14-10	10.5	16.0			
RF 14-12	13.0	22.0			
● RF 22-5S	5.3	12.0			
RF 22-6S	6.4	12.0			
RF 22-8S	8.4	12.0			
RF 22-5	5.3	16.5			
RF 22-6	6.4	16.5	1.4	4	25
RF 22-8	8.4	16.5			
RF 22-10S	10.5	16.5			
RF 22-10	10.5	17.5			
RF 22-12	13.0	22.0			
● RF 38-6S	6.4	15.3			
RF 38-8S	8.4	15.3			
RF 38-10S	10.5	15.3			
RF 38-6	6.4	22.0	1.5	2	35
RF 38-8	8.4	22.0			
RF 38-10	10.5	22.0			
RF 38-12	13.0	22.0			

Y型易進式絕緣端子

Insulated Spade Terminals

(easy-entry product)

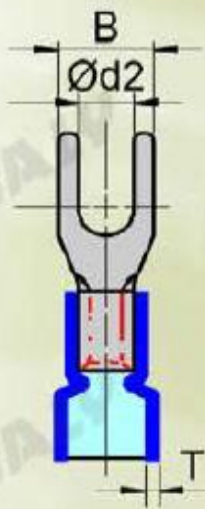


Unit:mm					
ITEM NO.	φ d2	B	T	AWG	DINmm ²
● YF 1.25-3S	3.7	5.7			
YF 1.25-3	3.7	6.2			
YF 1.25-4S	4.3	6.4	0.8	22-18	0.5-1.0
YF 1.25-4	4.3	7.2			
YF 1.25-5	5.3	8.0			
YF 1.25-6	6.4	10.7			
● YF 2-3S	3.7	5.7			
YF 2-3	3.7	6.2			
YF 2-4S	4.3	6.4	0.8	16-14	1.5-2.5
YF 2-4	4.3	7.2			
YF 2-5	5.3	8.0			
YF 2-6	6.4	10.7			
● YF 3.5-3S	3.7	6.4			
YF 3.5-3	3.7	7.4			
YF 3.5-4S	4.3	7.0	0.8	14-12	2.5-4
YF 3.5-4	4.3	8.0			
YF 3.5-5	5.3	8.0			
YF 3.5-6	6.4	10.8			
● YF 5.5-3S	3.7	7.2			
YF 5.5-3	3.7	8.2			
YF 5.5-4S	4.3	7.2	0.8	12-10	4-6
YF 5.5-4	4.3	8.2			
YF 5.5-5	5.3	9.0			
YF 5.5-6	6.4	10.8			

Y型絕緣端子

Insulated Spade Terminals

(general)

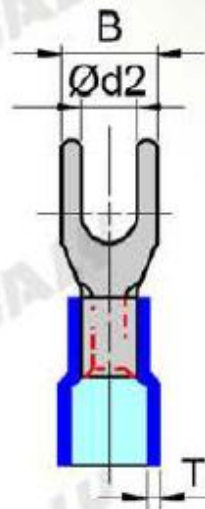


Unit:mm					
ITEM NO.	φ d2	B	T	AWG	DINmm ²
● YF 8-4	4.3	8.2			
YF 8-5	5.3	9.0	1.0	8	10
YF 8-6	6.4	12.0			
● YF 14-4	4.3	9.1			
YF 14-5	5.3	12.0	1.2	6	16
YF 14-6	6.4	12.0			
● YF 22-4S	4.3	9.1			
YF 22-4	4.3	12.0			
YF 22-5	5.3	12.0	1.4	4	25
YF 22-6	6.4	13.0			
YF 22-8	8.4	15.0			

Y前彎型易進式絕緣端子

Flanged Spade Terminals

(easy-entry product)

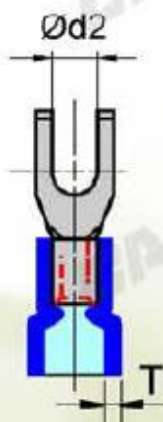


Unit:mm		
ITEM NO.	φ d2(mm)	T
● YF 1.25-3K	3.7	0.8
YF 1.25-4K	4.3	
YF 1.25-5K	5.3	
● YF 2-3K	3.7	0.8
YF 2-4K	4.3	
YF 2-5K	5.3	
● YF 3.5-3K	3.7	0.8
YF 3.5-4K	4.3	
YF 3.5-5K	5.3	
● YF 5.5-3K	3.7	0.8
YF 5.5-4K	4.3	
YF 5.5-5K	5.3	

R鉤型易進式絕緣端子

Hook Terminals


(Easy-Entry Product)

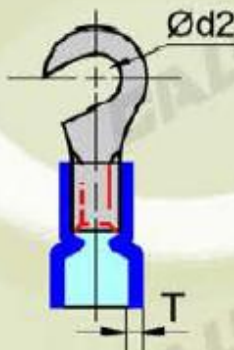

Unit:mm		
ITEM NO.	φ d2(mm)	T
● HF 1.25-3	3.7	0.8
HF 1.25-4	4.3	
HF 1.25-5	5.3	
● HF 2-3	3.7	0.8
HF 2-4	4.3	
HF 2-5	5.3	
● HF 3.5-4	4.3	0.8
HF 3.5-5	5.3	
● HF 5.5-4	4.3	0.8
HF 5.5-5	5.3	

Pin Terminals

針型端子

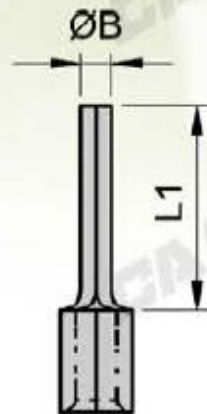


Unit:mm				
ITEM NO.	φ B	L1	AWG	DINmm ²
PIN 1.25	1.9	12.2	22-18	0.5-1.0
PIN 117	1.9	17.5	22-18	0.5-1.0
PIN 2	1.9	12.2	16-14	1.5-2.5
PIN 217	1.9	17.5	16-14	1.5-2.5
PIN 5.5	2.7	13.5	12-10	4-6

針型易進式絕緣端子

Insulated Pin Terminals

(Easy-Entry Product)

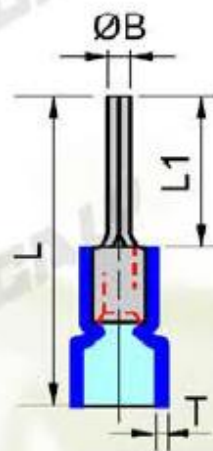


Unit:mm

ITEM NO.	φ B	L1	L	T	AWG	DINmm ²
● PIN 1.25AF	1.9	12.2	23.7		22-18	0.5-1.0
● PIN 117AF	1.9	17.5	27.5		22-18	0.5-1.0
● PIN 2AF	1.9	12.2	23.7	0.8	16-14	1.5-2.5
● PIN 217AF	1.9	17.5	27.5		16-14	1.5-2.5
● PIN 5.5AF	2.7	13.5	29.0		12-10	4.0-6.0

Flat Blade Terminals

扁平型裸端子

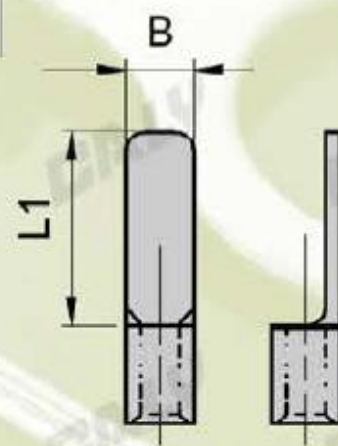


Unit:mm

ITEM NO.	B	L1	AWG	DINmm ²
PIN 110B	2.2	10.5	22-18	0.5-1.0
PIN 111B	2.9	11.0	22-18	0.5-1.0
PIN 114BS	2.2	14.0	22-18	0.5-1.0
PIN 114B	2.9	14.0	22-18	0.5-1.0
PIN 118B	2.2	18.0	22-18	0.5-1.0
PIN 2-9 B	2.8	9.0	16-14	1.5-2.5
PIN 210B	2.2	10.5	16-14	1.5-2.5
PIN 213B	2.2	13.0	16-14	1.5-2.5
PIN 218B	2.2	18.0	16-14	1.5-2.5
PIN 510B	2.8	10.5	12-10	4.0-6.0
PIN 518B	3.0	18.0	12-10	4.0-6.0

扁平型易進式絕緣端子

Insulated Flat Blade Terminals

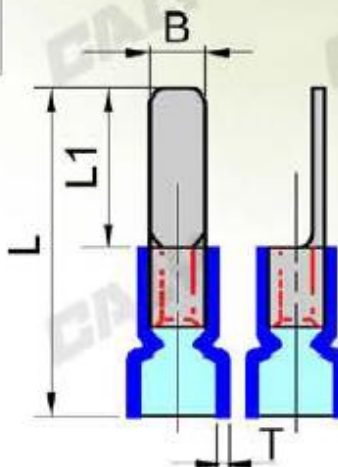


Unit:mm

ITEM NO.	B	L1	L	T	AWG	DINmm ²
● PIN 110FB	2.2	10.5	22.0		22-18	0.5-1.0
● PIN 111FB	2.9	11.0	22.5		22-18	0.5-1.0
● PIN 114FBS	2.2	14.0	25.5		22-18	0.5-1.0
● PIN 114FB	2.9	14.0	25.5		22-18	0.5-1.0
● PIN 118FB	2.2	18.0	29.5		22-18	0.5-1.0
● PIN 2-9 FB	2.8	9.0	20.5	0.8	16-14	1.5-2.5
● PIN 210FB	2.2	10.5	22.0		16-14	1.5-2.5
● PIN 213FB	2.2	13.0	24.5		16-14	1.5-2.5
● PIN 218FB	2.2	18.0	29.5		16-14	1.5-2.5
● PIN 510FB	2.8	10.5	26.0		12-10	4.0-6.0
● PIN 518FB	3.0	18.0	33.5		12-10	4.0-6.0

扁平前彎型絕緣端子

Lipped Blade Terminals

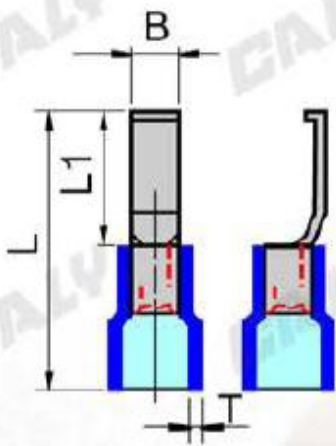

Unit:mm

ITEM NO.	B	L1	L	T	AWG
● PIN 128LB	2.8	17.8	27.3		22-18
● PIN 228LB	2.8	17.8	27.3	0.8	16-14
● PIN 146LB	4.6	17.8	27.3		22-18
● PIN 246LB	4.6	17.8	27.3	0.8	16-14
● PIN 530LB	3.0	17.5	30.0		12-10
● PIN 546LB	4.6	17.5	30.0	0.8	12-10

Butt Splice

紅銅板中接式絕緣套管端子

w/copper plate inside




Unit:mm

ITEM NO.	T	AWG	DI Nmm ²
● BF 1.25S		22-18	0.5-1.0
● BF 2S	0.8	16-14	1.5-2.5
● BF 5.5S		12-10	4.0-6.0

Butt Splice

紅銅管中接式絕緣套管端子

w/copper tube inside




Unit:mm

ITEM NO.	T	AWG	DI Nmm ²
● BF 1.25	0.8	22-18	0.5-1.0
● BF 2	0.8	16-14	1.5-2.5
● BF 5.5	0.8	12-10	4.0-6.0
● BF 8	1.0	8	10
● BF 14	1.2	6	16
● BF 22	1.4	4	25
● BF 38	1.5	2	35

尼龍絕緣中接管

Nylon Insulated Butt Splice

w/copper tube inside

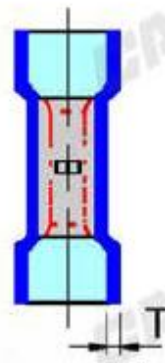


Unit:mm

ITEM NO.	T	AWG	DINmm ²
● BN 0.5	0.5	26-22	0.14-0.36
● BN 1.25		22-18	0.5-1.0
● BN 2	0.8	16-14	1.5-2.5
● BN 5.5		12-10	4.0-6.0

熱收縮中接管

Heat Shrinkable Butt Splice

w/copper tube inside

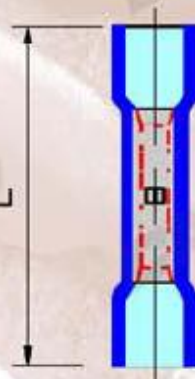

Unit:mm

ITEM NO.	L	AWG	DINmm ²
● HSB 1.25	36.0	22-18	0.5-1.0
● HSB 2	36.0	16-14	1.5-2.5
● HSB 5.5	41.0	12-10	4.0-6.0


(Female)

平網加銅套裸母端子

Non-Insulated Disconnecter with Copper Sleeve

Unit:mm


ITEM NO.	TAB SIZE	AWG	DINmm ²
D 1.25-3A-0.5	.110 x .020"	22-18	0.5-1.0
D 2-3A-0.5	2.8 x 0.5mm	16-14	1.5-2.5
D 1.25-3A-0.8	.110 x .032"	22-18	0.5-1.0
D 2-3A-0.8	2.8 x 0.8mm	16-14	1.5-2.5
D 1.25-5A-0.5	.187 x .020"	22-18	0.5-1.0
D 2-5A-0.5	4.8 x 0.5mm	16-14	1.5-2.5
D 1.25-5A-0.8	.187 x .032"	22-18	0.5-1.0
D 2-5A-0.8	4.8 x 0.8mm	16-14	1.5-2.5
D 1.25-7A	.250 x .032"	22-18	0.5-1.0
D 2-7A	6.35 x 0.8mm	16-14	1.5-2.5
D 5.5-7A		12-10	4.0-6.0

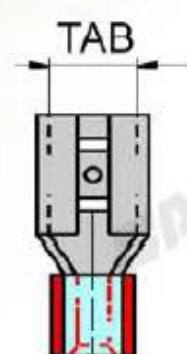

平網易進式絕緣母端子

(Easy-Entry Product)

Female Disconnecter

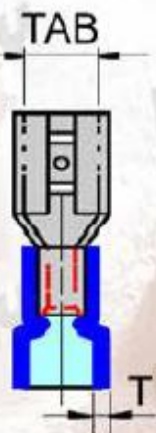


Unit:mm

ITEM NO.	TAB SIZE	T	AWG	DINmm ²
● V 1.25-3A-0.5	.110 x .020"		22-18	0.5-1.0
● V 2-3A-0.5	2.8 x 0.5mm	0.8	16-14	1.5-2.5
● V 1.25-3A-0.8	.110 x .032"		22-18	0.5-1.0
● V 2-3A-0.8	2.8 x 0.8mm	0.8	16-14	1.5-2.5
● V 1.25-5A-0.5	.187 x .020"		22-18	0.5-1.0
● V 2-5A-0.5	4.8 x 0.5mm	0.8	16-14	1.5-2.5
● V 1.25-5A-0.8	.187 x .032"		22-18	0.5-1.0
● V 2-5A-0.8	4.8 x 0.8mm	0.8	16-14	1.5-2.5
● V 1.25-7A	.250 x .032"		22-18	0.5-1.0
● V 2-7A	6.35 x 0.8mm	0.8	16-14	1.5-2.5
● V 5.5-7A			12-10	4.0-6.0
● V 5.5-10A	.375 x .032"	0.8	12-10	4.0-6.0
	9.5 x 0.8mm			

Female Disconnecter

平網易進式加短銅套絕緣母端子

(Double-crimping & easy-entry product)

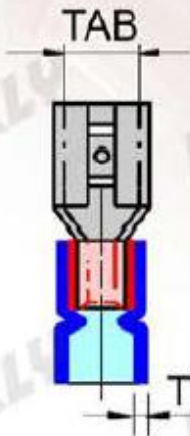


Unit:mm

ITEM NO.	TAB SIZE	T	AWG	DINmm ²
● VD 1.25-3A-0.5	.110 x .020"		22-18	0.5-1.0
● VD 2-3A-0.5	2.8 x 0.5mm	0.8	16-14	1.5-2.5
● VD 1.25-3A-0.8	.110 x .032"		22-18	0.5-1.0
● VD 2-3A-0.8	2.8 x 0.8mm	0.8	16-14	1.5-2.5
● VD 1.25-5A-0.5	.187 x .020"		22-18	0.5-1.0
● VD 2-5A-0.5	4.8 x 0.5mm	0.8	16-14	1.5-2.5
● VD 1.25-5A-0.8	.187 x .032"		22-18	0.5-1.0
● VD 2-5A-0.8	4.8 x 0.8mm	0.8	16-14	1.5-2.5
● VD 1.25-7A	.250 x .032"		22-18	0.5-1.0
● VD 2-7A	6.35 x 0.8mm	0.8	16-14	1.5-2.5
● VD 5.5-7A			12-10	4.0-6.0

平插加銅套裸公端子

(Male)

Non-Insulated Disconnecter with Copper Sleeve

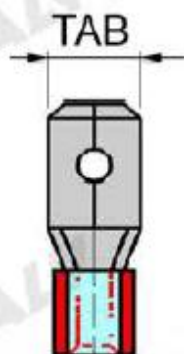


Unit:mm

ITEM NO.	TAB SIZE	AWG	DINmm ²
D 1.25-7B	.250 x .032"	22-18	0.5-1.0
D 2-7B	6.35 x 0.8mm	16-14	1.5-2.5
D 5.5-7B		12-10	4.0-6.0

平插易進式絕緣公端子

Male Disconnecter

(Easy-Entry Product)

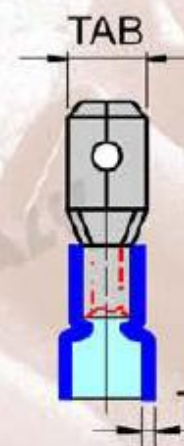


Unit:mm

ITEM NO.	TAB SIZE	T	AWG	DINmm ²
● V 1.25-7B	.250 x .032"		22-18	0.5-1.0
● V 2-7B	6.35 x 0.8mm	0.8	16-14	1.5-2.5
● V 5.5-7B			12-10	4.0-6.0

Male Disconnecter

平插易進式加短銅套絕緣公端子

(Double-crimping & easy-entry product)

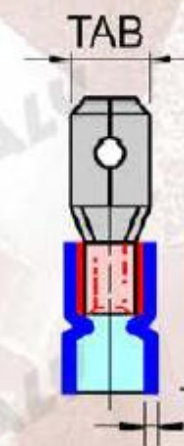

Unit:mm


ITEM NO.	TAB SIZE	T	AWG	DINmm ²
● VD 1.25-7B	.250 x .032"		22-18	0.5-1.0
● VD 2-7B	6.35 x 0.8mm	0.8	16-14	1.5-2.5
● VD 5.5-7B			12-10	4.0-6.0

平插絕緣公端子

Male Disconnecter


Unit:mm

ITEM NO.	TAB SIZE	T	AWG	DINmm ²
● V 1.25-3B-0.5	.110 x .020"		22-18	0.5-1.0
● V 2-3B-0.5	2.8 x 0.5mm	0.8	16-14	1.5-2.5
● V 1.25-3B-0.8	.110 x .032"		22-18	0.5-1.0
● V 2-3B-0.8	2.8 x 0.8mm	0.8	16-14	1.5-2.5
● V 1.25-5B-0.5	.187 x .020"		22-18	0.5-1.0
● V 2-5B-0.5	4.8 x 0.5mm	0.8	16-14	1.5-2.5
● V 1.25-5B-0.8	.187 x .032"		22-18	0.5-1.0
● V 2-5B-0.8	4.8 x 0.8mm	0.8	16-14	1.5-2.5

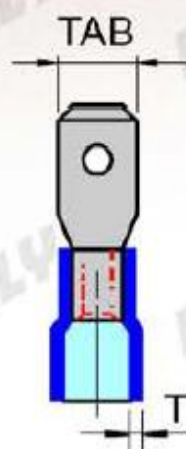

平網全絕緣母端子

Vinyl Fully Insulated Female Disconnecter

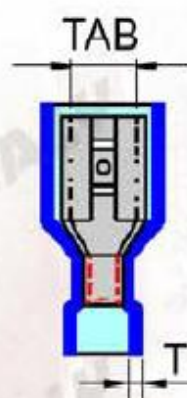


Unit:mm

ITEM NO.	TAB SIZE	T	AWG	DINmm ²
● PV 1.25-3A-0.5	.110 x .020"		22-18	0.5-1.0
● PV 2-3A-0.5	2.8 x 0.5mm	0.8	16-14	1.5-2.5
● PV 1.25-3A-0.8	.110 x .032"		22-18	0.5-1.0
● PV 2-3A-0.8	2.8 x 0.8mm	0.8	16-14	1.5-2.5
● PV 1.25-5A-0.5	.187 x .020"		22-18	0.5-1.0
● PV 2-5A-0.5	4.8 x 0.5mm	0.8	16-14	1.5-2.5
● PV 1.25-5A-0.8	.187 x .032"		22-18	0.5-1.0
● PV 2-5A-0.8	4.8 x 0.8mm	0.8	16-14	1.5-2.5
● PV 1.25-7A			22-18	0.5-1.0
● PV 2-7A	.250 x .032"	0.8	16-14	1.5-2.5
● PV 5.5-7A	6.35 x 0.8mm		12-10	4.0-6.0

(易進式銅套) (Double-crimping & easy-entry product)

平網全絕緣加銅套母端子

Vinyl Fully Insulated Female Disconnecter with Copper Sleeve

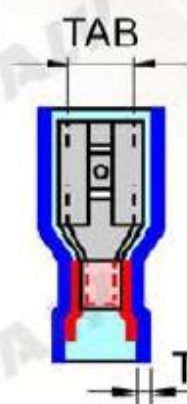

Unit:mm


ITEM NO.	TAB SIZE	T	AWG	DINmm ²
● PV 1.25-3AC-0.5	.110 x .020"		22-18	0.5-1.0
● PV 2-3AC-0.5	2.8 x 0.5mm	0.8	16-14	1.5-2.5
● PV 1.25-3AC-0.8	.110 x .032"		22-18	0.5-1.0
● PV 2-3AC-0.8	2.8 x 0.8mm	0.8	16-14	1.5-2.5
● PV 1.25-5AC-0.5	.187 x .020"		22-18	0.5-1.0
● PV 2-5AC-0.5	4.8 x 0.5mm	0.8	16-14	1.5-2.5
● PV 1.25-5AC-0.8	.187 x .032"		22-18	0.5-1.0
● PV 2-5AC-0.8	4.8 x 0.8mm	0.8	16-14	1.5-2.5
● PV 1.25-7AC			22-18	0.5-1.0
● PV 2-7AC	.250 x .032"	0.8	16-14	1.5-2.5
● PV 5.5-7AC	6.35 x 0.8mm		12-10	4.0-6.0

子彈型全絕緣母端子

Bullet Sockets



(Female)

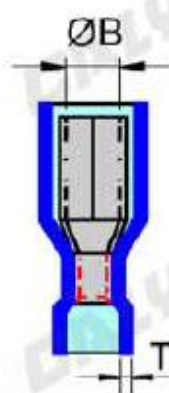

Unit:mm

ITEM NO.	φ B	T	AWG	DINmm ²
● F 1.25A	3.9		22-18	0.5-1.0
● F 2AS	3.9	0.8	16-14	1.5-2.5
● F 2A	4.9		16-14	1.5-2.5
● F 5.5A	4.9	0.8	12-10	4.0-6.0


子彈型全絕緣加銅套母端子

(易進式銅套) (Double-crimping & easy-entry product)

Bullet Sockets with Copper Sleeve



(Female)

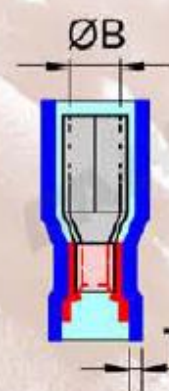

Unit:mm


ITEM NO.	φ B	T	AWG	DINmm ²
● F 1.25AC	3.9		22-18	0.5-1.0
● F 2ASC	3.9	0.8	16-14	1.5-2.5
● F 2AC	4.9		16-14	1.5-2.5
● F 5.5AC	4.9	0.8	12-10	4.0-6.0

子彈型易進式絕緣公端子

Bullet Terminals (easy-entry product)



(Male)

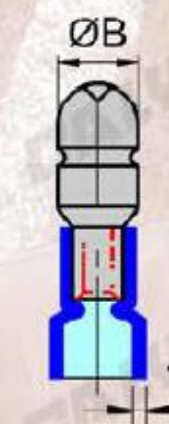

Unit:mm

ITEM NO.	φ B	T	AWG	DINmm ²
● F 1.25B	4		22-18	0.5-1.0
● F 2BS	4	0.8	16-14	1.5-2.5
● F 2B	5		16-14	1.5-2.5
● F 5.5B	5	0.8	12-10	4.0-6.0


(Double-crimping & easy-entry product)

子彈型易進式加短銅套絕緣公端子

Bullet Terminals with Copper Sleeve



(Male)

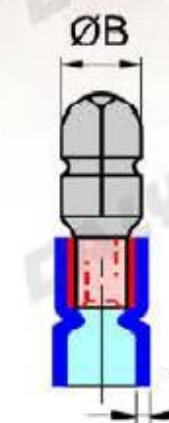

Unit:mm


ITEM NO.	φ B	T	AWG	DINmm ²
● FD 1.25B	4		22-18	0.5-1.0
● FD 2BS	4	0.8	16-14	1.5-2.5
● FD 2B	5		16-14	1.5-2.5
● FD 5.5B	5	0.8	12-10	4.0-6.0

子彈型尼龍全絕緣母端子

Nylon-Fully Insulated Bullet Sockets (Female)



(Female)




Unit:mm			
ITEM NO.	φ B	AWG	DINmm ²
● FN 1.25A	3.9	22-18	0.5-1.0
● FN 2AS	3.9	16-14	1.5-2.5
● FN 2A	4.9	16-14	1.5-2.5
● FN 5.5A	4.9	12-10	4.0-6.0

子彈型尼龍全絕緣公端子

Nylon-Fully Insulated Bullet Terminals (Male)



(Male)




Unit:mm			
ITEM NO.	φ B	AWG	DINmm ²
● FN 1.25B	4	22-18	0.5-1.0
● FN 2BS	4	16-14	1.5-2.5
● FN 2B	5	16-14	1.5-2.5
● FN 5.5B	5	12-10	4.0-6.0

子彈型尼龍全絕緣加銅套母端子 (易進式銅套) (Double-crimping & easy-entry product)

Nylon-Fully Insulated Bullet Sockets with Copper Sleeve



(Female)




Unit:mm			
ITEM NO.	φ B	AWG	DINmm ²
● FN 1.25AC	3.9	22-18	0.5-1.0
● FN 2ASC	3.9	16-14	1.5-2.5
● FN 2AC	4.9	16-14	1.5-2.5
● FN 5.5AC	4.9	12-10	4.0-6.0

子彈型尼龍全絕緣加銅套公端子 (易進式銅套) (Double-crimping & easy-entry product)

Nylon-Fully Insulated Bullet Terminals with Copper Sleeve



(Male)



Unit:mm			
ITEM NO.	φ B	AWG	DINmm ²
● FN 1.25BC	4	22-18	0.5-1.0
● FN 2BSC	4	16-14	1.5-2.5
● FN 2BC	5	16-14	1.5-2.5
● FN 5.5BC	5	12-10	4.0-6.0

平網尼龍全絕緣母端子

Nylon-Fully Insulated Coupler




(雙凸型)



Unit:mm			
ITEM NO.	TAB SIZE	AWG	DINmm ²
● PN 1.25-7A	.250 x .032"	22-18	0.5-1.0
● PN 2-7A	6.35 x 0.8mm	16-14	1.5-2.5
● PN 5.5-7A		12-10	4.0-6.0



(橢圓型)



Unit:mm			
ITEM NO.	TAB SIZE	AWG	DINmm ²
● PN 1.25-7AS	.250 x .032"	22-18	0.5-1.0
● PN 2-7AS	6.35 x 0.8mm	16-14	1.5-2.5



(3A方型，5A單凸型)



Unit:mm			
ITEM NO.	TAB SIZE	AWG	DINmm ²
● PN 1.25-3A-0.5	.110 x .020" 2.8 x 0.5mm	22-18	0.5-1.0
● PN 1.25-5A-0.5	.187 x .020"	22-18	0.5-1.0
● PN 2-5A-0.5	4.8 x 0.5mm	16-14	1.5-2.5
● PN 1.25-3A-0.8	.187 x .032" 2.8 x 0.8mm	22-18	0.5-1.0
● PN 1.25-5A-0.8	.187 x .032"	22-18	0.5-1.0
● PN 2-5A-0.8	4.8 x 0.8mm	16-14	1.5-2.5

平網尼龍全絕緣加銅套母端子

(易進式銅套) (Double-crimping & easy-entry product)


Nylon-Fully Insulated Coupler with Copper Sleeve



(Female)



(Female)

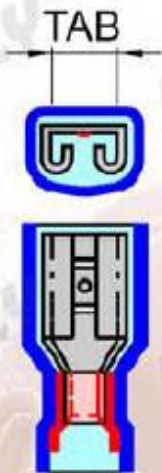

Unit:mm			
ITEM NO.	TAB SIZE	AWG	DINmm ²
● PN 1.25-3AC-0.5	.110 x .020"	22-18	0.5-1.0
	2.8 x 0.5mm		
● PN 1.25-3AC-0.8	.110 x .032"	22-18	0.5-1.0
	2.8 x 0.8mm		
● PN 1.25-5AC-0.5	.187 x .020"	22-18	0.5-1.0
● PN 2-5AC-0.5	4.8 x 0.5mm	16-14	1.5-2.5
● PN 1.25-5AC-0.8	.187 x .032"	22-18	0.5-1.0
● PN 2-5AC-0.8	4.8 x 0.8mm	16-14	1.5-2.5

Unit:mm			
ITEM NO.	TAB SIZE	AWG	DINmm ²
● PN 1.25-7ASC	.250 x .032"	22-18	0.5-1.0
● PN 2-7ASC	6.35 x 0.8mm	16-14	1.5-2.5
● PN 5.5-7ASC		12-10	4.0-6.0

平插尼龍全絕緣公端子

(Male Disconnecter)


Nylon-Fully Insulated Coupler



(雙凸型)



(橢圓型)

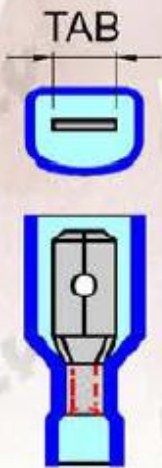

Unit:mm			
ITEM NO.	TAB SIZE	AWG	DINmm ²
● PN 1.25-7B	.250 x .032"	22-18	0.5-1.0
● PN 2-7B	6.35 x 0.8mm	16-14	1.5-2.5
● PN 5.5-7B		12-10	4.0-6.0


Unit:mm			
ITEM NO.	TAB SIZE	AWG	DINmm ²
● PN 1.25-7BS	.250 x .032"	22-18	0.5-1.0
● PN 2-7BS	6.35 x 0.8mm	16-14	1.5-2.5

平叉尼龍全絕緣加銅套公端子 (易進式銅套) (Double-crimping & easy-entry product)

Nylon-Fully Insulated Coupler with Copper Sleeve




(Male)

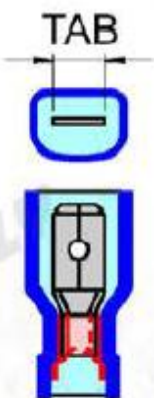

ITEM NO.	TAB SIZE	AWG	Unit:mm	
			DINmm ²	
● PN 1.25-7BSC	.250 x .032"	22-18	0.5-1.0	
● PN 2-7BSC	6.35 x 0.8mm	16-14	1.5-2.5	
● PN 5.5-7BSC		12-10	4.0-6.0	

旗型尼龍全絕緣端子 (Female)

Nylon-Fully Insulated Flag Terminals

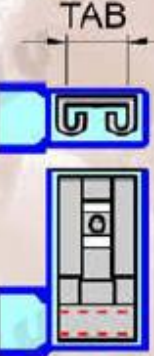


ITEM NO.	TAB SIZE	AWG	Unit:mm	
			DINmm ²	
● FLN 1-7A	.250 x .032"	22-18	0.5-1.0	
● FLN 2-7A	6.35 x 0.8mm	16-14	1.5-2.5	

(easy-entry product)

平插網易進式絕緣端子

Piggy Back Disconnecter

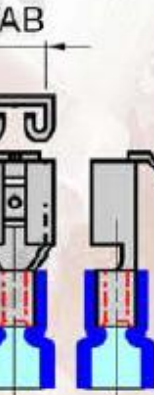


ITEM NO.	TAB SIZE	AWG	Unit:mm	
			DINmm ²	
● MF 1.25-7A	.250 x .032"	22-18	0.5-1.0	
● MF 2-7A	6.35 x 0.8mm	16-14	1.5-2.5	
● MF 5.5-7A		12-10	4.0-6.0	

(易進式銅套) (Double-crimping & easy-entry product)

平插網絕緣加銅套端子

Piggy Back Disconnecter with Copper Sleeve

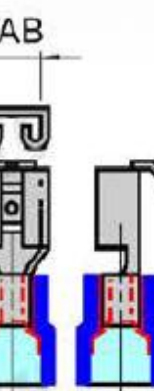


ITEM NO.	TAB SIZE	AWG	Unit:mm	
			DINmm ²	
● MF 1.25-7AC	.250 x .032"	22-18	0.5-1.0	
● MF 2-7AC	6.35 x 0.8mm	16-14	1.5-2.5	
● MF 5.5-7AC		12-10	4.0-6.0	

歐式端子

Non-Insulated Cord-End Sleeves

(DIN-46228/1) (Material : Copper tube, Tin plated)

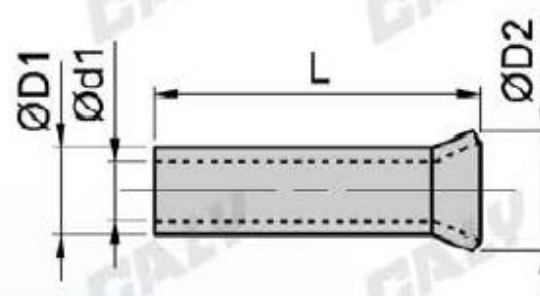

Unit:mm

ITEM NO.	WIRE RANGE mm ² AWG	L	φ d1 unit : mm	φ D1	φ D2
CN 0.5-6		6			
CN 0.5-8	0.50	8	1.0	1.3	2.1
CN 0.5-10	22	10			
CN 0.75-6		6			
CN 0.75-8	0.75	8	1.2	1.5	2.3
CN 0.75-10	20	10			
CN 1.0-6		6			
CN 1.0-8	1.00	8	1.4	1.7	2.5
CN 1.0-10	18	10			
CN 1.0-12		12			
CN 1.5-7		7			
CN 1.5-8	1.50	8	1.7	2.0	2.8
CN 1.5-10	16	10			
CN 1.5-12		12			
CN 2.5-7		7			
CN 2.5-8		8			
CN 2.5-10	2.50	10	2.2	2.5	3.4
CN 2.5-12	14	12			
CN 2.5-18		18			
CN 4-8		8			
CN 4-9		9			
CN 4-10	4.00	10	2.8	3.2	4.0
CN 4-12	12	12			
CN 4-15		15			
CN 4-18		18			
CN 6-10		10			
CN 6-12	6.00	12	3.5	3.9	4.7
CN 6-15	10	15			
CN 6-18		18			
CN 10-12		12			
CN 10-15	10.00	15	4.5	4.9	5.8
CN 10-18	8	18			

Unit:mm


ITEM NO.	WIRE RANGE mm ² AWG	L	φ d1 unit : mm	φ D1	φ D2
CN 16-12		12			
CN 16-15	16.00	15	5.8	6.2	7.5
CN 16-18	6	18			
CN 25-15		15			
CN 25-16		16			
CN 25-18	25.00	18	7.3	7.7	9.5
CN 25-20	4	20			
CN 25-22		22			
CN 35-16		16			
CN 35-18	35.00	18	8.3	8.7	11.0
CN 35-20	2	20			
CN 35-25		25			
CN 50-18		18			
CN 50-20	50.00	20	10.3	10.9	13.0
CN 50-22	1/0	22			
CN 50-25		25			
CN 70-22		22			
CN 70-25	70.00	25	13.5	14.3	15.3
CN 70-32	2/0	32			
CN 95-25	95.00	25			
CN 95-32	3/0	32	14.7	15.5	16.6
CN 120-30		30			
CN 120-32	120.00	32	16.7	17.6	18.6
CN 120-34	4/0	34			
CN 150-32	150.00	32	19.5	20.5	21.5
CN 150-38	250-300	38			
MCM					

★Specifications for reference only; changing w/o prior notice.

絕緣歐式端子

Cord-End sleeves (DIN-46228/4)

(Insulation : Polyamid 66, -50°C) (Material : Copper tube, Tin plated)

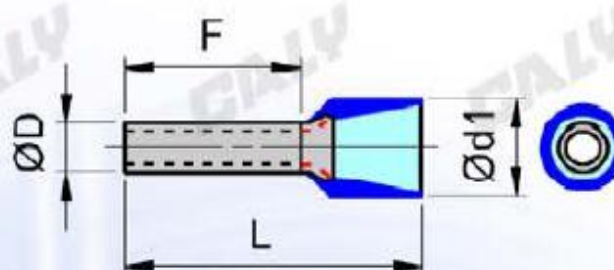

Unit:mm

ITEM NO.	WIRE RANGE mm ² AWG	L unit : mm	F unit : mm	φ D	φ d1	(T) French	Color Systems (W) German	(D) DIN
CE 0.25-6	0.25	10	6	1.05	2.5	● Violet	● l.blue	
CE 0.25-8	26	12	8					
CE 0.34-6	0.34	10	6	1.10	2.5	● pink	● turkis	
CE 0.34-8	24	12	8					
CE 0.5-6		12	6					
CE 0.5-8	0.50	14	8	1.30	3.2	○ white	● orange	○ white
CE 0.5-1.0	22	16	10					
CE 0.75-6		12	6					
CE 0.75-8	0.75	14	8	1.50	3.4	● m.blue	○ white	● grey
CE 0.75-10	20	16	10					
CE 0.75-12		18	12					
CE 1.0-6		12	6					
CE 1.0-8	1.00	14	8	1.70	3.6	● red	● yellow	● red
CE 1.0-10	18	16	10					
CE 1.0-12		18	12					
CE 1.5-6		12	6					
CE 1.5-8		14	8					
CE 1.5-10	1.50	16	10	2.00	4.1	● black	● d.red	● black
CE 1.5-12	16	18	12					
CE 1.5-18		24	18					
CE 2.5-8		14	8					
CE 2.5-10	2.50	16	10	2.50	4.8	● grey	● blue	● blue
CE 2.5-12	14	18	12					
CE 2.5-18		24	18					
CE 4-10		17	10					
CE 4-12	4.00	20	12	3.20	5.5	● orange	● grey	● grey
CE 4-18	12	26	18					
CE 6-12	6.00	20	12	3.90	7.0	● green	● black	● yellow
CE 6-18	10	26	18					
CE 10-12	10.00	22	12	4.90	8.4	● brown	○ ivory	● red
CE 10-18	8	28	18					
CE 16-12	16.00	24	12	6.20	9.6	○ ivory	● green	● blue
CE 16-18	6	28	18					
CE 25-16		28	16					
CE 25-18	25.00	30	18	7.70	12.0	● black	● brown	● yellow
CE 25-22	4	35	22					
CE 35-16		30	16					
CE 35-18	35.00	32	18	8.70	13.5	● red	● beige	● red
CE 35-25	2	39	25					
CE 50-20	50.00	36	20	10.9	16.0	● blue	● olive	● blue
CE 50-25	1/0	40	25					
CE 70-21	70.00	37	21	14.3	17.2			● yellow
	2/0							
CE 95-25	95.00	44	25	15.5	19.2			● red
	3/0							
CE 120-27	120.00	48	27	17.6	21.4			● blue
	4/0							
CE 150-32	150.00	58	32	20.5	25.0			● yellow
250-300MCM								

★Specifications for reference only; changing w/o prior notice


★Tri-rated system is available.

CALY Electrical Terminals - 28

雙線絕緣歐式端子

Cord-End Twin Sleeves

- Insulation : Polyamid 66, -50°C ~ +150°C
- Material : Copper Tube, Tin plated

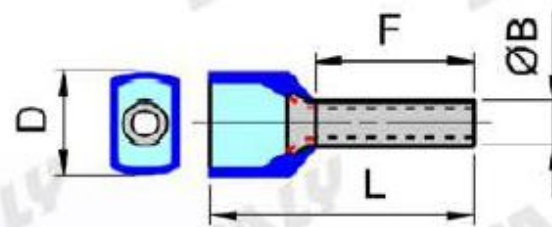

Unit:mm

ITEM NO.	Conductor (mm ²)	L	F unit:mm	φB	D	(T) French	(W) German	(D) DIN
CT 0.5-8	2 x 0.5	15	8	1.8	3.0 x 5.2	○ White	● Orange	○ White
CT 0.75-8	2 x 0.75	15	8	2.1	3.3 x 5.5	● Blue	○ White	● Grey
CT 0.75-10	2 x 0.75	17	10	2.1	3.3 x 5.5			
CT 1.0-8	2 x 1.0	15	8	2.35	4.0 x 6.0	● Red	● Yellow	● Red
CT 1.0-10	2 x 1.0	17	10	2.35	4.0 x 6.0			
CT 1.5-8	2 x 1.5	16	8	2.6	4.2 x 7.2	● Black	● Red	● Black
CT 1.5-12	2 x 1.5	20	12	2.6	4.2 x 7.2			
CT 2.5-10	2 x 2.5	18.5	10	3.2	4.8 x 8.4	● Grey	● Blue	● Blue
CT 2.5-13	2 x 2.5	21.5	13	3.2	4.8 x 8.4			
CT 4-12	2 x 4.0	23	12	4.1	5.7 x 9.6	● Orange	● Grey	● Grey
CT 6-14	2 x 6.0	26	14	5.2	7.7 x 10.8		● Black	● Yellow
CT 10-14	2 x 10.0	26.5	14	6.8	8.6 x 13.8	● Brown	○ Ivory	● Red
CT 16-14	2 x 16.0	31.5	14	8.9	10.6 x 19.6	○ Ivory	● Green	● Blue

彈簧式螺旋端子

Wire-Nut Connectors

(W/inner spring)

Unit:mm




ITEM NO.	AWG	COLOR
C 201 / Y1	22-16	grey orange
C 202 / Y2	22-14	blue
C 204 / Y3	22-14	orange
C 205 / Y4	18-12	yellow
C 206 / Y6	18-10	red

單口絕緣端子

Closed-End Connectors

Unit:mm




ITEM NO.	L	AWG	DINmm ²
N 1.25L	19.2	22-18	0.5-1.0
N 2L	20.8	16-14	1.5-2.5
N 5.5L	24.8	12-10	4.0-6.0
N 8L	27.1	8	10

軟式絕緣膠套

Soft Vinyl - Cap

Unit:mm

ITEM NO.	φ d1	φ d2	L±2	AWG	DINmm ²
SV 1.25	3.3	3.1	15	22-18	0.5-1.0
SV 2	4.5	3.7	16	16-14	1.5-2.5
SV 3.5	5.7	4.1	18	14-12	4
SV 5.5	5.7	5.2	20	12-10	6
SV 8	7.2	6.2	21	8	10
SV 10	8.5	6.6	26		8
SV 12	10.0	7.3	27		12
SV 14	10.0	8.0	28	6	16
SV 22	12.0	9.5	29	4	25
SV 38	14.0	11.8	34	2	35
SV 60	17.0	13.9	42	1/0	50
SV 70	17.0	15.1	45	2/0	70
SV 80	19.5	16.0	46	3/0	95
SV 100	22.0	18.0	55	4/0	120
SV 125	24.4	20.0	60	250mcm	120
SV 150	24.4	22.0	65	300mcm	150
SV 185	29.0	24.0	66.7	300mcm	185
SV 200	32.2	24.0	69	400mcm	200
SV 250	37.5	26.5	75	500mcm	240
SV 325	37.5	30.0	75	600mcm	300
SV 400	45.1	37.5	83		400
SV 500	48.2	40.2	85		500
SV 630	53.8	45.2	93		630

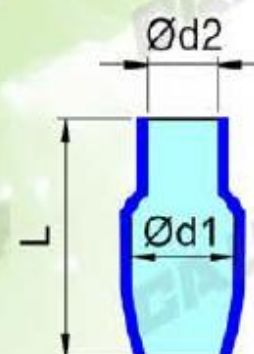


★ Stander Color : red, white, blue, black, yellow, green.

開放型端子

Open-Barrel Terminals

MMF-1

FL1-7A

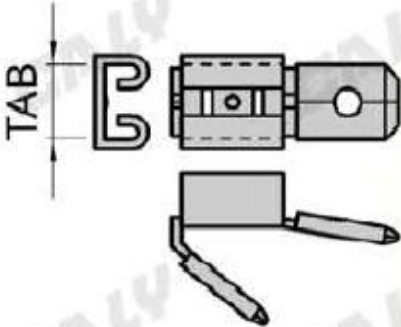

ITEM NO.	TAB SIZE
MMF-1	.250 x .032" 6.35 x 0.8mm
FL- 1-7A	.250 x .032" 6.35 x 0.8mm

★使用軟式絕緣膠套③
W/③ Connect Sleeves

Female Disconnectors



平網母端子

★使用軟式絕緣膠套④
W/④ Connect Sleeves

ITEM NO.	TAB SIZE	AWG
BL2-110A-0	.110 x .020" 2.8 x 0.5mm	22-16
BL2-187A-0	.187x .020" 4.8 x 0.5mm	22-16
BL2-250A-0	.250 x .032" 6.35 x 0.8mm	22-16

Male Disconnectors



平叉公端子

★使用軟式絕緣膠套②
W/② Connect Sleeves

ITEM NO.	TAB SIZE	AWG
BL2-110B-0	.110 x .020" 2.8 x 0.5mm	22-16
BL2-187B-0	.187x .020" 4.8 x 0.5mm	22-16
BL2-250B-0	.250 x .032" 6.35 x 0.8mm	22-16

Male Disconnectors



平叉公勾端子

★使用軟式絕緣膠套②
W/② Connect Sleeves

ITEM NO.	TAB SIZE	AWG
BL2-110BH-0	.110 x .020" 2.8 x 0.5mm	22-16
BL2-187BH-0	.187x .020" 4.8 x 0.5mm	22-16
BL2-250BH-0	.250 x .032" 6.35 x 0.8mm	22-16

Bullet Sockets



子彈型母端子

★使用軟式絕緣膠套①
W/① Connect Sleeves

ITEM NO.	TAB SIZE	AWG
BL2-156A-0	ψ 3.5	22-16
BL2-195A-0	ψ 4.0	22-16

Bullet Terminals



子彈型公端子

★使用軟式絕緣膠套②
W/② Connect Sleeves

ITEM NO.	TAB SIZE	AWG
BL2-156B-0	ψ 3.5	22-16
BL2-195B-0	ψ 4.0	22-16

Spade Terminals



圓Y型端子(螃蟹型)

★使用軟式絕緣膠套②
W/② Connect Sleeves

ITEM NO.	TAB SIZE	AWG
BS2-6RY-0	ψ 6.7	22-12
BS2-8RY-0	ψ 8.2	22-12

軟式絕緣膠套

Connect Sleeves



快速支線夾

Quick Splice

(Push-In Wire Connectors)



ITEM NO.	AWG	DINmm ²
● 3M-501	22-18	0.5-1.0
● 3M-502	16-14	1.5-2.5



ITEM NO.	AWG	DINmm ²
● M 1.25	22-18	0.5-1.0
● M 2	16-14	1.5-2.5
● M 5.5	12-10	4.0-6.0



ITEM NO.	AWG	DINmm ²
● 3M-811	22-18	0.5-1.0
● 3M-812	16-14	1.5-2.5
● 3M-813	12-10	4.0-6.0

插式電線接頭

Push-In Wire Connectors



ITEM NO.	AWG	POLES	COLOR
● PC-2	22-12	2	red
● PC-3	22-12	3	orange
● PC-4	22-12	4	yellow
● PC-5	22-12	5	grey
● PC-8	22-12	8	black

配線標誌

Wire / Cable Markers

EC - Type wire markers / EC型配線標誌



★ Black legend on yellow markers/黃底黑字

- Cable Marker has flexible interior to contain different sizes of wires so that the wire making work can be easier.
- Standard color yellow or white. Others optional.
- Special markers available upon request.

Unit:mm

ITEM NO. 型號	Wire Size 適用線徑 mm ²	Inner diameter 內徑	Length 長度	Q'ty./ Reel 每卷數量
EC - 0	0.75	2.0 to 3.2	3.5	1,000 PCS
EC - 1	0.75-3.5	3.0 to 4.2	4.0	1,000 PCS
EC - 2	3.5-8.0	4.2 to 6.2	5.0	500 PCS
EC - 3	8.0-22.0	6.2 to 9.1	5.5	250 PCS

O - Type wire markers / O型配線標誌(厚短型)



★ Black legend on white color markers/白底黑字

Unit:mm

ITEM NO. 型號	Wire Size 線徑 mm ² /AWG	Inner diameter 內徑	Length 長度	Q'ty./ Reel 每卷數量
OA-1.0	1.0 / 26-24	1.0	4.0	1,000 PCS
OA-1.5	1.5 / 24-22	1.5	4.0	1,000 PCS
OA-2.0	2.0 / 22-20	2.0	4.0	1,000 PCS
OA-2.5	2.5 / 18-16	2.5	5.0	1,000 PCS
OA-3.0	3.0 / 16-14	3.0	5.0	1,000 PCS
OA-3.5	3.5 / 14-12	3.5	5.0	500 PCS
OA-4.5	4.5 / 12-10	4.5	5.0	500 PCS
OA-5.0	5.0 / 10-8	5.0	5.0	250 PCS
OA-6.0	6.0 / 8-6	6.0	5.0	250 PCS

O - Type wire markers / O型配線標誌(薄長型)



★ Black legend on white color markers/白底黑字

Unit:mm

ITEM NO. 型號	Wire Size 線徑 mm ² /AWG	Inner diameter 內徑	Length 長度	Q'ty./ Bag 每包數量
OM-0.75	0.75 / 26-24	3.0	10.0	100 PCS
OM-1.25	1.25 / 22-18	3.2	10.0	100 PCS
OM-2	2.0 / 16-14	3.6	10.0	100 PCS
OM-3.5	3.5 / 14-12	4.2	10.0	100 PCS
OM-5.5	5.5 / 12-10	5.1	10.0	100 PCS
OM-8	8 / 8	6.0	10.0	100 PCS
OM-14	14 / 6	7.6	10.0	100 PCS
OM-22	22 / 4	9.6	10.0	100 PCS

Clip - on wire markers / N型配線標誌

★ Black legend on white markers
/白底黑字(30PCS/支)

- Installed before or after terminations are made.
- Withstanding harsh environments and high temperature. From -22 F (-30 C) to 194 F (90 C)
- Removable and reusable.
- Resistant to chemical environments.


Unit:mm

ITEM NO. 型號	Wire Size 適用線徑 AWG	Dimension φ I.D./內 φ O.D./外		L	Q'ty./ Box 每盒數量
LT-020	26-28	1.0	1.9	2.4	100 PCS/支
LT-021	24-22	1.5	2.8	3.0	100 PCS/支
LT-022	22-20	2.0	3.4	3.0	100 PCS/支
LT-023	18-16	2.5	4.0	3.0	100 PCS/支
LT-024	16-14	3.2	4.6	3.0	100 PCS/支
LT-025	14-12	3.7	5.2	3.0	50 PCS/支
LT-026	12-10	4.2	6.0	3.0	50 PCS/支

端子台 (平底型)

Terminal Block

(Flat base type)

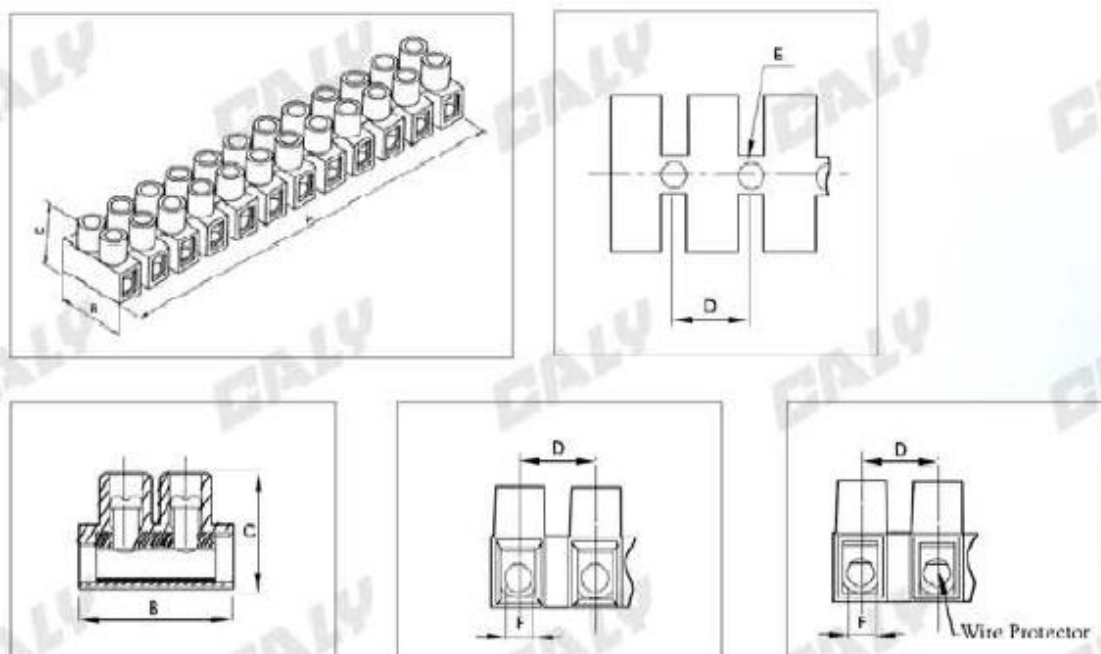


型號 ITEM NO.	線徑 mm ²	安培 Amp	電壓 Volts.	螺絲 Screw	Unit	尺寸 Dimensions (mm/in.)						包裝 Peaking	備註 Remark
PA8F	1.5	17.5	450	M2.6x5	(mm)	95.80	16.30	13.30	8.00	2.90	2.80	50 Pcs/Bag.	無彈片
PA8 FDS	1.5	17.5	450	M2.6x5	(in)	3.772	0.642	0.524	0.315	0.114	0.110	10Bags/Carton	附加彈片
PA10F	2.5	24.0	450	M3.0x6	(mm)	117.5	20.20	15.80	10.00	3.60	3.20	50 Pcs/Bag.	無彈片
PA10 FDS	2.5	24.0	450	M3.0x6	(in)	4.626	0.795	0.622	0.394	0.142	0.126	10Bags/Carton	附加彈片

★Wire Protector(+DS) : Stainless spring steel

端子台 (H型，底部加高1.2MM)

Terminal Block

(H type)

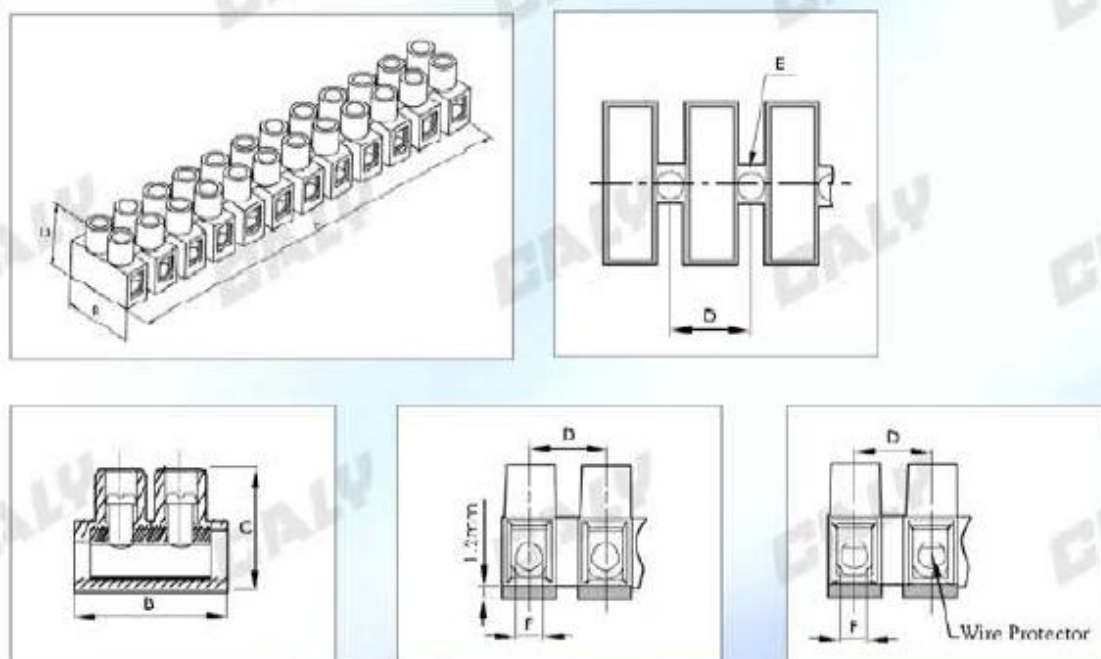

型號 ITEM NO.	線徑 mm ²	安培 Amp	電壓 Volts.	螺絲 Screw	Unit	尺寸 Dimensions (mm/in.)						包裝 Peaking	備註 Remark
PA8H	1.5	17.5A	450V	M2.6x5	(mm)	96.20	17.00	14.50	8.00	2.90	2.80	50 Pcs/Bag.	無彈片
PA8 HDS	1.5	17.5A	450V	M2.6x5	(in)	3.787	0.669	0.570	0.315	0.114	0.110	10Bags/Carton	附加彈片
PA10H	2.5	24A	450V	M3.0x6	(mm)	117.5	20.20	17.00	10.00	3.60	3.40	50 Pcs/Bag.	無彈片
PA10 HDS	2.5	24A	450V	M3.0x6	(in)	4.625	0.795	0.670	0.394	0.142	0.134	10Bags/Carton	附加彈片
PA12H	6.0	41A	500V	M3.5x7	(mm)	140.7	23.80	19.00	12.00	3.90	3.90	50 Pcs/Bag.	無彈片
PA12 HDS	6.0	41A	500V	M3.5x7	(in)	5.400	0.937	0.748	0.472	0.154	0.154	8Bags/Carton	附加彈片
PA14H	10.0	57A	500V	M4x9	(mm)	158.0	25.60	25.20	13.50	4.40	4.80	25 Pcs/Bag.	無彈片
PA14 HDS	10.0	57A	500V	M4x9	(in)	6.220	1.008	0.992	0.531	0.173	0.189	10Bags/Carton	附加彈片

★Wire Protector(+DS) : Stainless spring steel

紮線帶

Cable Ties

(Wring Accessories)



ITEM NO.		width x length (mm) (approx.)	bundle dia. (mm) (max.)	loop tensile strength (min.)
color:natural	color:black			
CC2-060	CC2-060B	2.4x63.7	11	8kgs/18lbs
CC2-075	CC2-075B	2.4x7.5	15	"
CC2-080	CC2-080B	2.4x80	16	"
CC2-094	CC2-094B	2.5x96	21	"
CC2-100	CC2-100B	2.5x100	22	"
CC2-120S	CC2-120SB	2.5x120	28	"
CC2-140S	CC2-140SB	2.5x142	35	"
CC2-150S	CC2-150SB	2.5x150	39	"
CC2-165	CC2-165B	2.5x165	43	"
CC2-200M	CC2-200MB	2.5x203	55	"
CC2-400S	CC2-400SB	2.5x203	116	"
CC3-120	CC3-120B	3.2x120	27	18kgs/40lbs
CC3-140	CC3-140B	3.2x140	34	"
CC3-150	CC3-150B	3.6x150	36	"
CC3-180	CC3-180B	3.6x180	46	"
CC3-200S	CC3-200SB	3.2x203	53	"
CC3-200A	CC3-200AB	3.6x203	52	"
CC3-250M	CC3-250MB	3.6x250	68	"
CC3-265	CC3-265B	3.6x265	73	"
CC3-292	CC3-292B	3.6x292	82	"
CC3-330	CC3-330B	3.6x330	93	"
CC3-368S	CC3-368SB	3.6x368	105	"
CC4-120L	CC4-120LB	4.8x120	27	22kgs/50lbs
CC4-160L	CC4-160LB	4.8x160	39	"
CC4-190	CC4-190B	4.8x190	49	"
CC4-200	CC4-200B	4.8x203	52	"
CC4-250	CC4-250B	4.8x250	68	"
CC4-280	CC4-280B	4.8x280	77	"
CC4-300S	CC4-300SB	4.8x300	83	"
CC4-310	CC4-310B	4.8x310	86	"
CC4-368	CC4-368B	4.8x368	105	"
CC4-385	CC4-385B	4.8x385	110	"
CC4-432	CC4-432B	4.8x432	125	"
CC4-450M	CC4-450MB	4.8x450	131	"
CC4-500	CC4-500B	4.8x500	147	"
CC4-550S	CC4-550SB	4.8x550	162	"
CC4-610S	CC4-610SB	4.8x610	181	"
CC4-635S	CC4-635SB	4.8x630	189	"
CC4-914S	CC4-914SB	4.8x914	278	"

ITEM NO.		width x length (mm) (approx.)	bundle dia. (mm) (max.)	loop tensile strength (min.)
color:natural	color:black			
CC7-120LL	CC7-120LLB	7.6x120	22	55kgs/120lbs
CC7-150L	CC7-150LB	7.6x150	32	"
CC7-200L	CC7-200LB	7.6x203	52	"
CC7-240L	CC7-240LB	7.6x240	61	"
CC7-280L	CC7-280LB	7.6x280	74	"
CC7-300	CC7-300B	7.6x300	80	"
CC7-340	CC7-340B	7.6x340	92	"
CC7-380	CC7-380B	7.6x380	105	"
CC8-380L	CC8-380LB	8.0x380	105	80kgs/175lbs
CC8-450	CC8-450B	8.0x450	128	"
CC8-500L	CC8-500LB	8.0x500	143	"
CC8-550	CC8-550B	8.0x550	160	"
CC9-610	CC9-610B	9.0x605	177	"
CC9-685	CC9-685B	9.0x680	202	"
CC9-710	CC9-710B	9.0x705	209	"
CC9-762	CC9-762B	9.0x762	227	"
CC9-812	CC9-812B	9.0x812	243	"
CC9-914	CC9-914B	9.0x914	275	"
CC9-940	CC9-940B	9.0x940	284	"
CC9-1168	CC9-1168B	9.0x1168	356	"
CC9-1219	CC9-1219B	9.0x1219	372	"
CC9-1500	CC9-1500B	9.0x1500	462	"
CC12-230XL	CC12-230XLB	12.7x230	57	114kgs/250lbs
CC12-280XL	CC12-280XLB	12.7x280	73	"
CC12-380XL	CC12-380XLB	12.7x380	105	"
CC12-480XL	CC12-480XLB	12.7x480	137	"
CC12-550L	CC12-550LB	12.7x550	159	"
CC12-580XL	CC12-580XLB	12.7x580	169	"
CC12-730XL	CC12-730XLB	12.7x730	216	"
CC12-880XL	CC12-880XLB	12.7x880	264	"
CC12-1030XL	CC12-1030XLB	12.7x1030	312	"

端子組合

Terminal Kits

Y-100 series
(Blistercard)

Y-110 series
(Double Blister)

Y-120
(50pcs)



Y-150 (46pcs)



Y-170 P.P. Box is available (150pcs)



Y-130
(51 pcs)

Y-140
(140 pcs)



Y-190 P.P. Box is available (151pcs)



Y-201
(100 pcs)

Y-202
(120 pcs)

Y-200
(300 pcs)



Y-220

Y-230

Y-240



氣動壓著端子鉗

Pneumatic Crimping Tool with adjustable positioner



Weight : 0.8kgs

JAW SET / 夾具



Weight : 7.45kgs

YS-302 / 腳踏開關及桌上架



Weight : 5.8kgs

YS-301 / 桌上架

STANDARD ACCESSORIES:

1. AIR CYLINDER (A200-1/A200-2)
2. JAW SET (W/POSITIONER&DIES)

OPTIONAL:

1. HAND FREE HOLDER (YS-301)
2. FOOT SWITCH SET (YS-302)

★Please indicate the AIR CYLINDER and DIE NO, to quote accordingly.

FEATURES:

1. To crimp workpieces at a proper position with quickness, preciseness and safety.
2. The positioner on JAW-set can be adjusted to adapt various wire terminals.
3. You can choose the suitable Die for different wire sizes.

★JAW SET / (INCLUDING POSITIONER & DIE COUPLE)

氣缸

Air Cylinder



A 200-1 / 長氣缸

A 200-2 / 短氣缸

ITEM NO.	Available DIE-type	Weight	Length
A200-1	for full range Dies	1.3 kg	33 cm
A200-2	for NT-125, NT-200, IT-125, IT-200, CE-125, CE-200, RJ-45&CO-0560 only.	1.0 kg	22 cm

★Air pressure recommended : 90-120psi, 5-6kg

JAW SET NO.	Available wire Terminals		AWG	DI Nmm ²
NT-125 NT-200 NT-500	For Non-Insulated Terminals (裸端子)		22-18 16-14 12-10	0.5-1.0 1.5-2.5 4.0-6.0
IT-125 IT-200 IT-500 黃銅 IT-500A 紅銅	For all Vinyl Ins.-Terminals (絕緣端子) For Vinyl-Ins. w/o copper sleeve For Vinyl-Ins. w/ copper sleeve		22-18 16-14 12-10 12-10	0.5-1.0 1.5-2.5 4.0-6.0 4.0-6.0
IT-125N IT-200N IT-500N	For all Nylon Ins.-Terminals (尼龍絕緣端子)		22-18 16-14 12-10	0.5-1.0 1.5-2.5 4.0-6.0
CE-125 CE-200 CE-500	For Closed-End Terminals (閉端子)		22-18 16-14 12-10	0.5-1.0 1.5-2.5 4.0-6.0
ST-200	For Open-Barrel Terminals (開放型端子)		20-16	0.75-1.5
CO-0560	For Cord-End Sleeves (歐式端子)		22-10	0.5-6.0

歐式端子專用壓著鉗（適用線徑0.08mm² ~ 16mm²）

Cable Ferrules Crimping Tool（For Wire Range 0.08mm²~16mm²）



YAC-08（藍柄）

適用線徑 0.08mm² ~ 6mm²



YAC-10（紅柄）

適用線徑 0.75mm² ~ 10mm²



YAC-16（藍柄）

適用線徑 4mm² ~ 16mm²

Hand Crimping Tools 手壓式壓著端子鉗（附定位座）

（ with adjustable & replaceable positioner）



YS-03B

For Open-Barrel terminals
0.75-4.0mm²



YS-03CO

For Cord-End Sleeves
0.25-6.0mm²



YS-03FC

For Ins. - Terminals 1.5-2.5mm²
& .250 "(6.35mm) Flag Terminal

JAW SET NO.	Available wire Terminals	
YS-03B	For Open-Barrel terminals 0.75-4.0mm ² (附定位座，用於開放型端子)	
YS-03BM	For Open-Barrel terminals 0.5-2.5mm ² (附定位座，用於開放型端子)	
YS-03C	For Ins.- Terminals 1.0-6.0mm ² (附定位座，用於絕緣端子)	
YS-03CO	For Cord-End Sleeves 0.25-6.0mm ² (用於歐式端子)	
YS-03FC	For Ins. - Terminals 1.5-2.5mm ² & .250 "(6.35mm) Flag Terminal (用於旗型裸端子及絕緣端子)	
YS-03FN	For Nylon-Fully Insulated Flag Terminal 0.5-2.5mm ² (用於尼龍絕緣旗型端子)	

強力省力型壓接鉗

Hand Crimping Tools - Energy Saving system

**SU-2** 裸端子專用壓接規格: 0.5 ~ 2.5mm²

重量: 0.23kg 長度: 190mm

**SU-6** 裸端子專用壓接規格: 0.5 ~ 6mm²

重量: 0.23kg 長度: 190mm

**SU-5** 裸端子專用壓接規格: 1.25 ~ 6mm²

重量: 0.23kg 長度: 190mm

· 小型設計 · 輕巧 · 適合長時間使用 ·

**SU-8**

裸端子專用

壓接規格: 1.25 ~ 8mm²

重量: 0.43kg 長度: 260mm

**SU-9**

裸端子專用

壓接規格: 1.25 ~ 8mm²

重量: 0.43kg 長度: 260mm

**SU-16**

裸端子專用

壓接規格: 1.25 ~ 14mm²

重量: 0.51kg 長度: 285mm

**SU-22**

裸端子專用

壓接規格: 5.5 ~ 22mm²

重量: 0.73kg 長度: 365mm

**SU-38**

裸端子專用

壓接規格: 5.5 ~ 38mm²

重量: 0.82kg 長度: 365mm

**SU-13**

絕緣開端子專用

壓接規格: 0.5 ~ 6mm²

重量: 0.51kg 長度: 285mm

**SU-11**

絕緣端子專用

壓接規格: 1.25 ~ 2.0mm²

重量: 0.6kg 長度: 285mm

**SU-12**

絕緣端子專用

壓接規格: 2.0 ~ 5.5mm²

重量: 0.6kg 長度: 285mm

型號	適用壓接端子規格mm ²	型號	適用壓接端子規格mm ²
SU-8	1.25, 2, 5.5, 8	SU-2	0.5, 1.25, 2
SU-9	1.25, 2, 5.5, 8	SU-6	0.5, 1.25, 2, 5.5
SU-16	1.25, 2, 5.5, 8, 14	SU-5	1.25, 2, 3.5, 5.5
SU-22	5.5, 8, 14, 22	SU-11	1.25, 2
SU-38	5.5, 8, 14, 22, 38	SU-12	2, 5.5
		SU-13	1(0.5-1.75), 2(1-30), 5(2.5-6)

特點:

★把手設計符合人體工學，操作舒適，省力

★本體使用特殊鋼材經熱處理耐用度高

★夾具設計依國際規範製作壓接效果達到國際標準

手壓式壓著端子鉗

Hand Crimping Tools



• for reference only.

ITEM NO.	AVAILABLE RANGE (適用範圍)	Weight	Length
LY-03B	for Open-Barrel Terminals 0.5-6.0mm ² (開放型端子)	0.6kg	230mm
LY-03C	for Insulated Terminals 0.75-6.0mm ² (絕緣端子)	0.6kg	230mm
LY-02H	for RG58, RG59, RG62... (同軸電纜)	0.6kg	230mm
LY-05H	for RG6, RG58, RG59, RG62... (同軸電纜)	0.6kg	230mm
LY-04WF	for Cord-End Sleeves 0.5-4mm ² (歐式端子)	0.6kg	230mm
LY-16WF	for Cord-End Sleeves 6.0-16mm ² (歐式端子)	0.6kg	230mm
LY03-FL	for Insulated Flag Terminals 0.5-2.5mm (尼龍旗型)	0.6kg	230mm



• for reference only.

ITEM NO.	AVAILABLE RANGE (適用範圍)	Weight	Length
KH-6	for Non-Ins. Terminals 0.5-6mm ² (裸端子)	0.23kg	195mm
KH-8	for Non-Ins. Terminals 1.5-10mm ² (裸端子)	0.6kg	250mm
KH-16	for Non-Ins. Terminals 2.0-16mm ² (裸端子)	0.6kg	270mm
KH-22	for Non-Ins. Terminals 6.0-25mm ² (裸端子)	0.92kg	365mm
KH-38	for Non-Ins. Terminals 6.0-35mm ² (裸端子)	0.92kg	365mm
KH-13	for Closed-End Terminals 0.5-6mm ² (閉端子)	0.6kg	270mm
AA-35C	for Insulated Terminals 10-35mm ² (絕緣端子)	2.12kg	409mm
KH-50WF	for Cord-End Sleeves 25-50mm ² (歐式端子)	0.7kg	280mm



• for reference only

ITEM NO.	AVAILABLE RANGE (適用範圍)	Weight	Length
KH-11	for Insulated Terminals 0.5-2.5mm ² (絕緣端子)	0.8kg	270mm
KH-12	for Insulated Terminals 1.5-6.0mm ² (絕緣端子)	0.8kg	270mm



• for Non-Ins. Terminals
• With Moveable & Revolving Dies

ITEM NO.	AVAILABLE RANGE (適用範圍)	Weight	Length
CT-38	10-35mm ² 8AWG-2AWG (裸端子)	2.9kg	556mm
CT-60	16-70mm ² 6AWG-2/0AWG (裸端子)	3.8kg	676mm
CT-80	10-95mm ² 8AWG-3/0AWG (裸端子)	3.9kg	638mm
CT-100	25-120mm ² 4AWG-4/0AWG (裸端子)	4.9kg	676mm
CT-150	16-150mm ² 6AWG-300MCM (裸端子)	4.9kg	676mm

手壓式壓著端子鉗

Hand Crimping Tools



- for Non-Ins. Terminals
 - With Moveable & Revolving Dies
 - The handle length is adjustable
- ★ 伸縮式手柄

ITEM NO.	AVAILABLE RANGE (適用範圍)			Weight	Length
HX-160	70-150mm ²	2/0mcm-300mcm	(裸端子)	4.5kg	980mm
HX-240	120-240mm ²	250mcm-500mcm	(裸端子)	4.5kg	980mm
HX-400	180-400mm ²	300mcm-750mcm	(裸端子)	4.5kg	980mm



- Hexagon Crimping
- With Moveable & Revolving Dies

ITEM NO.	AVAILABLE RANGE (適用範圍)			Weight	Length
HX-50B	for CABLE LUGS(copper) 6-50mm ²	(銅管端子, 六角型)		1.3kg	390mm
HX-120B	for CABLE LUGS(copper) 10-120mm ²	(銅管端子, 六角型)		4kg	620mm
HX-150B	for CABLE LUGS(copper) 25-150mm ²	(銅管端子, 六角型)		4kg	620mm



- for Non-Ins. Terminals & Cable Lugs
 - With Non-Ratchet screw adjustment
 - Designed For Copper (8AWG to 4/0AWG) and Aluminum (8AWG to 250mcm)
- ★ 螺絲調整式, 方便壓接不同尺寸的端子

ITEM NO.	AVAILABLE RANGE (適用範圍)			Weight	Length
KH-150	for CABLE LUGS(copper) 10-120mm ²	(裸端子&銅管端子)		3.5kg	595mm
KH-170	for CABLE LUGS(copper) 10-150mm ²	(裸端子&銅管端子)		3.8kg	770mm



- for Non-Ins. Terminals & Cable Lugs
 - With Non-Ratchet screw adjustment
 - Designed For Copper (8AWG to 4/0AWG) and Aluminum (8AWG to 250mcm)
- ★ 螺絲調整式, 方便壓接不同尺寸的端子

ITEM NO.	AVAILABLE RANGE (適用範圍)			Weight	Length
KH-120	for CABLE LUGS(copper) 10-95mm ²	(裸端子&銅管端子)		2.8kg	558mm

油壓動力式端子鉗

Hydraulic Crimping Tools



TP - 150D (U型壓著)
for Non-Ins. Terminals 16-185mm²
(6AWG-300mcm)



TP - 325 (U型壓著)
for Non-Ins. Terminals 16-400mm²
(6AWG-750mcm)



TP - 240 (六角型壓著)
for Crimping Connector 35-240mm²
(2AWG-500mcm)
25mm JAW opening, w/Fiberglass Handles



TP - 400 (六角型壓著)
for Crimping Connector 35-400mm²
(2AWG-750mcm)
38mm JAW opening, w/Fiberglass Handles



H-A



H-B



F-B



AP-801

ITEM NO.	OPERATED TYPE	MAX.PRESSURE kg/cm		OUTPUT PER STROKE CC		RESERVOIR CAPACITY	WEIGHT kg	PUMP SPEED	SIZE (mm) L x W x H
		1ST STAGE	2ND STAGE	1ST STAGE	2ND STAGE				
H - A	HAND OPERATED	—	700	—	2.26	600cc	6	SINGLE	530x120x125
H - B	HAND OPERATED	20	700	12.26	2.26	700cc	8	TWO	600x150x150
F - B	FOOT OPERATED	20	700	12.26	2.26	700cc	10.5	TWO	840x180x150
AP - 801	AIR OPERATED		700	OIL DELIVERY 1cc/stroke 300cc/min		700cc	10.0		380x150x205



- CO - 400 (U)** w / Indent Dies 16-400mm² (6AWG-750mcm)
- CO - 400 (H)** w / Hexagonal Dies 70-400mm² (2/0AWG-750mcm)
- CO - 630** w / Hexagonal Dies 300-630mm²
For Distribution & Transmission line 70-630mm² (2/0AWG-1200mcm)

油壓式沖孔機

Hydraulic Punch Driver

**MAP - 10**

for punching into
switchboards control
panels and others.

OUTPUT (TON)	10 TON		
PUNCHING	PLATE THICKNESS	STAINLESS STEEL	1.6mm
		MILD STEEL	3.2mm
CAPACITY	HOLE DIAMETER	21.8mm (1/2") - 115.5mm (4")	
RAM STROKE	25mm		
OIL CAPACITY	40cc		
WEIGHT	2.3kg		
DIE SIZE (inch mm)	PUNCH SET FOR THICKWALL CONDUIT-10SETS		
	1/2" ϕ (21.8)	3/4" ϕ (27.6)	1" ϕ (34.1) 1-1/4" ϕ (42.7)
	1-1/2" ϕ (48.7)	2" ϕ (60.5)	2-1/2" ϕ (76.1) 3" ϕ (88.9)
	3-1/2" ϕ (102.8)	4" ϕ (115.5)	

電話端子壓著鉗

Modular Crimping Tools

• **LY-268**• **LY-246****LY-246**

- For 6P6C/RJ-12, 6P4C/RJ-11, 6P2C, 4P4C and 4P2C plugs.
- Weight: 0.38kg Length: 203mm

LY-268

For 8P8C/RJ-45, 6P6C/RJ-12, 6P4C/RJ-11, 6P2C plugs.

- For Cutting-Stripping-Crimping two types of plugs in one.
- All metal constructions.
- Weight: 0.38kg Length: 203mm

• **LY-500**• **LY-568R****LY-568**

- For 6P2C, 6P4C, 6P6C and 8P-RJ45 use.
- Weight: 0.38kg Length: 185mm

LY-500 (PROFESSIONAL)

For Crimping 6P-RJ11/12, 8P-RJ45.

- Suitable for both Stranded and Solid wire.
- Weight: 0.5kg Length: 192mm

剥線鉗

Wire Stripper

**LY-700A (6-1/2")**

· for 0.5-2.0mm² WIRE
Weight: 0.4kg
Length: 170mm

**LY-700B (6-1/2")**

· for 1.0-3.2mm² WIRE
Weight: 0.4kg
Length: 170mm

**LY-700D**

· for 0.5-8.0mm²
Weight: 0.2kg
Length: 175mm

**LY-731A**

· for 0.13-6.0mm²
Weight: 0.3kg
Length: 205mm

**LY-731B**

· for 0.13-6.0mm²
Weight: 0.3kg
Length: 205mm

電纜剥皮鉗

Cable Stripper

**LY-26-1**

4-28mm ϕ
Weight: 0.1kg
Length: 130mm

**LY-26-3**

28-35mm ϕ
Weight: 0.1kg
Length: 130mm

**LY-26-4**

35-50mm ϕ
Weight: 0.1kg
Length: 140mm

**LY-26-5**

8-28mm ϕ
Weight: 0.1kg
Length: 145mm

**LY-26-6**

8-28mm ϕ
Weight: 0.1kg
Length: 190mm

**LY-25-9**

4.5-25mm ϕ
Weight: 0.2kg
Length: 135mm

**LY-312B**

(3 BLADES MODEL)
PRE-SET FOR STRIPPING
RG-58/59
Weight: 0.1kg
Length: 100mm

各式裁剪鉗

Hand Cutter

**LK - 38A** (Cable Cutter)

- for cutting Copper & Aluminum Cable up to 35mm² (2 AWG)
- Weight: 0.3kg Length: 210mm

**LK - 60A** (Cable Cutter)

- for cutting Copper & Aluminum Cable up to 60mm² (1/0 AWG)
- Weight: 0.5kg Length: 250mm

**LK - 325** (Cable Cutter)

- for cutting Copper & Aluminum Cable up to 300mm² (600mcm)
- Weight: 2.1kg Length: 600mm
- W/Aluminum Alloy Handle

**LK - 500** (Cable Cutter)

- for cutting Copper & Aluminum Cable up to 500mm² (1000mcm)
- Weight: 3.0kg Length: 770mm

**LY - 206** (Wire Cutter)

- for cutting wire up to 3/8" dia.
- Weight: 0.2kg Length: 167mm

**LK - 325A** (Ratcheting Cable Cutter)

- for cutting Copper & Aluminum Cable up to 300mm² (600mcm), ϕ 32mm
- Weight: 0.7kg Length: 250mm

**LK - 450A** (Ratcheting Cable Cutter)

- for cutting Copper & Aluminum Cable up to 400mm² (750mcm), ϕ 50mm
- Weight: 0.96kg Length: 240mm

**LK - 520A** (Ratcheting Cable Cutter)

- for cutting Copper & Aluminum Cable up to 400mm² (750mcm), ϕ 52mm
- Weight: 0.9kg Length: 270mm
- 6-1/2"O.A.L. carbon steel and hardened, red cushioned handle.

**L - 42A**

- PVC PIPE CUTTER (MAX, ϕ 42mm)
- Weight: 0.4kg Length: 190mm
- BLADE: Molybdenum Vanadium Stainless Steel

**L - 25**

- PVC PIPE CUTTER (MAX, ϕ 34mm)
- Weight: 0.4kg Length: 180mm
- HANDLE: Alloy Aluminum ADC-12

紮線槍

Tie Gun



LY-600A

for tensioning and
cut-off Cable Ties
2.4mm-4.8mm width.
Weight: 0.3kg
Length: 160mm



LY-600T

for tensioning and
cut-off Cable Ties
2.4mm-4.8mm width.
Weight: 0.3kg
Length: 150mm



LY-600L

for tensioning and
cut-off Cable Ties
max.width 13mm.
Weight: 0.3kg
Length: 210mm



LY-519

for Cable Ties width
from 3.6 to 9.0mm.
Weight: 0.4kg
Length: 190mm
LY-519C
UP TO 12.3mm

多功能端子鉗

Crimping Tools



LY-104 SERIES

LY-1041	LY-1042	LY-1043
AWG-mm ²	AWG-mm ²	AWG-mm ²
18-0.9	26, 24-0.2	30-0.25
16-1.25	22-0.35	28-0.32
14-2.0	20-0.5	26-0.4
12-3.5	18-0.9	24-0.6
10-5.5	16-1.25	22-0.65
Weight: 0.2kg	Weight: 0.2kg	Weight: 0.2kg
Length: 173mm	Length: 173mm	Length: 173mm

7 in 1 TOOL with GRINDING BLADES
(Wire Stripper, Wire Cutter, Wire Loop, Steelwire Cutter,
Pliers,Scale mm & inch, Crimping Tool)

■ 4 WAYS IN 1 (Crimping, Bolt Cutter, Wire Cutter & Wire Stripper) 四合一多功能簡易端子鉗



• (可壓著開放型端子, 裁剪螺絲, 線材及剝線)
Length: 20.2cm



• (可壓著絕緣型端子, 裁剪螺絲, 線材及剝線)
Length: 20.2cm



• (可壓著絕緣型端子, 裁剪螺絲, 線材及剝線)
Length: 21.7cm



Length: 21.7cm

■ 5 WAYS IN 1 (Crimping Ins. & Non-Ins. Terminals, Bolt Cutter, Wire Cutter & Wire Stripper) 五合一多功能簡易端子鉗

• (可壓著絕緣型端子 & 裸端子, 裁剪螺絲, 線材及剝線)。