


MAP® UL2990 AWM 758

LOW VOLTAGE COMPUTER CABLE

產品說明 PRODUCT DESCRIPTION

- *導體為軟銅線或鍍錫銅 Bare copper or Tinned copper conductor
 - *聚丙烯或聚乙烯絕緣 PP or PE insulation
 - *芯線集合後鋁箔帶及編織網隔離 Cross cable under Al and braid shield
 - *鍍錫軟銅地線 Tinned stranded copper drain wire
 - *資料傳輸電纜,PVC 披覆 Data transmission cable,PVC jacket
 - *額定溫度 80°C Rated temperature80 °C
 - *額定電壓 30V Rated voltage:30V
 - *符合 Appliance Wiring Material UL 758.
-

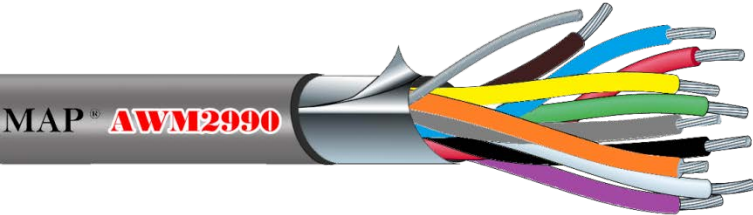

低電壓信號電纜,由 28AWG 芯線對數所組成,集合後採用雙重遮蔽隔離,傳遞高清電腦信號。

Low Voltage signal cable.UL2990 consist of 28AWG cable(Pairs) . Adopting double shielding, it has excellent transmission.

STYLE	AWG	PAIRS	SHIELD MATERIAL	INSULATION THICKNESS	NOMINAL CAPACITANCE	
UL2990	28	5P	AL Foil 100%	0.12 mm	A: 23 pF/m	B: 30 pF/m
UL2990	28	10P	AL Foil 100%	0.12 mm	A: 23 pF/m	B: 30 pF/m
UL2990	28	14P	AL Foil 100%	0.12 mm	A: 23 pF/m	B: 30 pF/m
UL2990	28	19P	AL Foil 100%	0.12 mm	A: 23 pF/m	B: 30 pF/m
UL2990	28	25P	AL Foil 100%	0.12 mm	A: 23 pF/m	B: 30 pF/m
UL2990	28	34P	AL Foil 100%	0.12 mm	A: 23 pF/m	B: 30 pF/m
UL2990	28	50P	AL Foil 100%	0.12 mm	A: 23 pF/m	B: 30 pF/m
UL2990	28	25P	AL Foil 100%	0.24 mm	A: 12 pF/m	B: 25 pF/m

大域科技股份有限公司

TA YU SCIENCE Co., Ltd

+886-3-329-8989

+886-3-329-7811

tayui@ms24.hinet.net

benson@tayui.com.tw

www.tayui.com.tw