
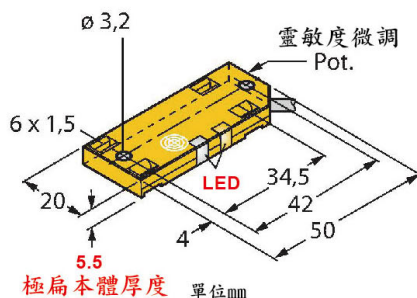


BCE10-QF5.5-AP6X2 極扁型三用途位置


BCE10-QF5.5-AN6X2 靜電容量型傳感器

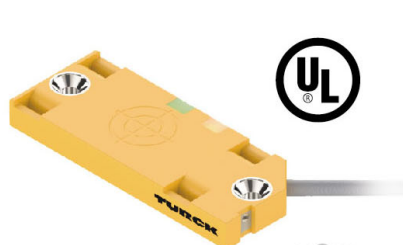

- 一體三用型
- 液體管路(不受液體顏色影響)
液位位置檢測
- 全密閉環境flush可用型
- 半密閉環境non flush可用型


Technical data

ID 100025146	Type	BCE10-QF5.5-AP6X2 (PNP.N.O.)
ID 100029093	Type	BCE10-QF5.5-AN6X2 (NPN.N.O.)
Rated switching distance (flush)	10 mm	
Rated switching distance (non-flush)	10 mm	
Operating voltage	10...30 VDC	
Switching frequency	0.05 kHz	
Output function	3-wire, NO contact, PNP or NPN type	
Short-circuit protection	yes / Cyclic	
Cable quality	Ø 3 mm, Lif9Y-11Y, PUR, 2 m cable	
Protection class	IP65	
Power-on /LED Green	Switching state / LED, Yellow	

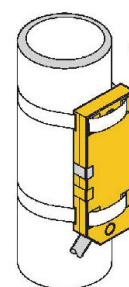


管路液位位置(束帶固定)

單體安裝 non flush



單體安裝 flush

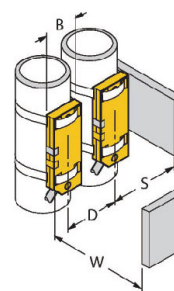

多數安裝距離

Distance D	40 mm
Distance W	30 mm
Distance S	30 mm
Diameter active area B	Ø 20 mm

