



## HEAT SHRINKABLE-BUTT SPLICE CONNECTORS "HT"(TUBULAR TYPE)


**MAXIMUM ELECTRIC CURRENT :**

A.W.G.	26	24	22	20	18	16	14	12	10	8
AMP.	5.5	7	9	12	17	18	30	35	50	70

**MAXIMUM ELECTRICAL RATING :** 600 VOLTS MAX.

**SHRINK TEMP. :** 150°C **OPERATING TEMP.:** -10°C ~ +105°C

**INSULATION MATERIAL :** HIGH DENSITY PE.

**TERMINAL MATERIAL :** COPPER TUBULAR


WIRE RANGE A.W.G. mm <sup>2</sup>	ITEM NO.	DIMENSION inch/mm				INSULATED COLOR	CRIMPING TOOL	Q'TY BOX
		d2		L				
26-22 A.W.G. 0.2-0.5 mm <sup>2</sup>	BHT0.5	.051	1.3	1.138	28.9	CLEAR	K.S. MODEL YL8-067 WITH DIE INDEX NO:0.5	1000
22-16 A.W.G. 0.5-1.5 mm <sup>2</sup>	BHT1	.067	1.7	1.417	36.0	RED	K.S. MODEL KST2000G WITH DIE INDEX NO.1	1000
16-14 A.W.G. 1.5-2.5 mm <sup>2</sup>	BHT2	.091	2.3	1.417	36.0	BLUE	K.S. MODEL KST2000G WITH DIE INDEX NO.2	500
12-10 A.W.G. 4-6 mm <sup>2</sup>	BHT5	.134	3.4	1.614	41.0	YELLOW	K.S. MODEL KST2000G WITH DIE INDEX NO.5	500
8 A.W.G. 8 mm <sup>2</sup>	BHT8	.181	4.6	1.929	49.0	RED	K.S. MODEL LY-2045D OR IZUMI MODEL 8 WITH DIE INDEX NO:8	250

## HEAT SHRINKABLE-CHANGING DOWN BUTT SPLICE CONNECTORS

**MAXIMUM ELECTRIC CURRENT :**

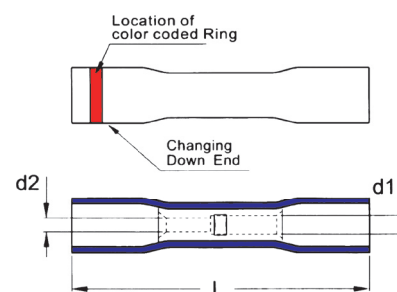
A.W.G.	22	20	18	16	14	12	10
AMP.	9	12	17	18	30	35	50

**MAXIMUM ELECTRICAL RATING :** 600 VOLTS MAX.

**SHRINK TEMP. :** 150°C **OPERATING TEMP.:** -10°C ~ +105°C

**INSULATION MATERIAL :** HIGH DENSITY PE.

**TERMINAL MATERIAL :** COPPER TUBULAR

**※NOTE:**INSULATION COLOR WITH CHANGING DOWN AND COLOR STRIPE.


WIRE RANGE A.W.G. mm <sup>2</sup>	ITEM NO.	DIMENSION inch/mm			INSULATION COLOR WITH CHANGING DOWN END COLOR RING	CRIMPING TOOL	QTY BOX
		d1	d2	L			
16-14 to 22-16 1.5-2.5 to 0.5-1.5	BHT2CD1	.091 2.3	.087 1.7	1.417 36.0	BLUE WITH RED COLOR RING	K.S. MODEL KST2000G WITH DIE INDEX NO:2	500
12-10 to 16-14 4-6 to 1.5-2.5	BHT5CD2	.134 3.4	.091 2.3	1.614 41.0	YELLOW WITH BLUE COLOR RING	K.S. MODEL KST2000G WITH DIE INDEX NO:5	400