



Product Name: Interface Device

Product Type: JR-46KC

Features:

With Wiegand or TTL interface which can be transferred to be RS232 or RS485 signal output

Built-in one alarm loop for sensor or other detector

Built-in two Relay for NO/NC signal output


Through RS232 or RS485 to make the command transmission

As the interface of JST-320


Proximity Reader is available (Magnetic stripe Reader, Barcode Reader is the option device)

When JR-46KC disconnect to JST-320 panel, the Card capacity is 1,000,000, but those cards must legal to open door on the reader.

Diagram :

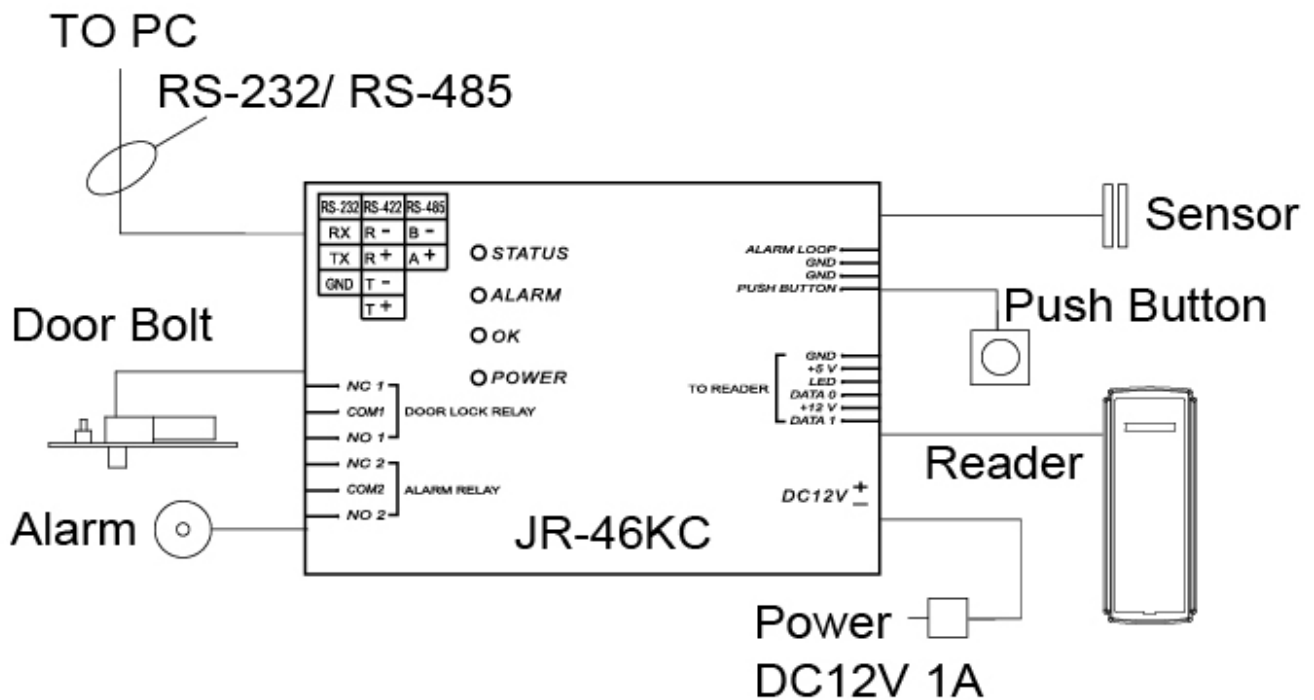

Configuration :

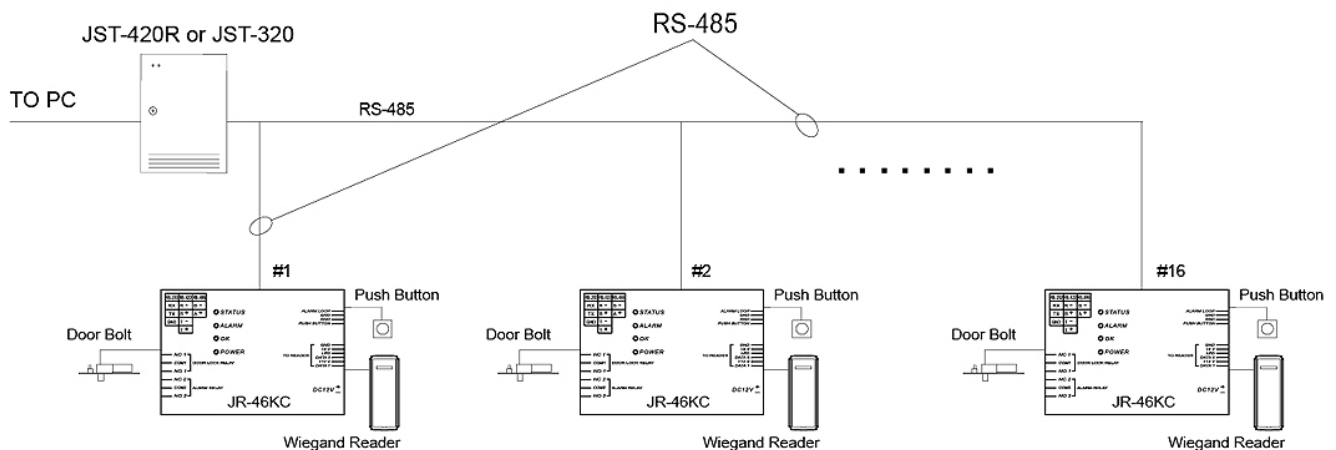

Specifications:

power requirement	DC12V 1Amp
Environment	Operating Temperature:0°C~50°C
Humidity	20%~90% RH

Dimensions	110(L) x 95(W) x 26(H)mm
Relay	2 relay contact (Max. DC 12V 1Amp)

Ordering Information:

- Option Access Controller : JST-420 / JST-320
- Option Reader (Wiegand) : PR-200 / PR-75W / PR-400

Reference models:

Taiwan Jantek Electronics., Ltd.	www.jantek.com.tw
Add:6F-1, No. 1, Wuquan 1St.Rd.,Xinzhuang District,	TEL : 886-2-22991255
New Taipei City 24892,Taiwan, R.O.C.	
FAX : 02-2299-1257 / 02-2299-7412	Email : service@jantek.com.tw