


說明:

導體:裸軟銅線 Bare Copper

絕緣體:PVC(聚氯乙烯)電纜。可區分為 60°C、90°C及 105°C之耐溫等級。

結構:如附表一。線材結構依需求使用包帶及填充物。

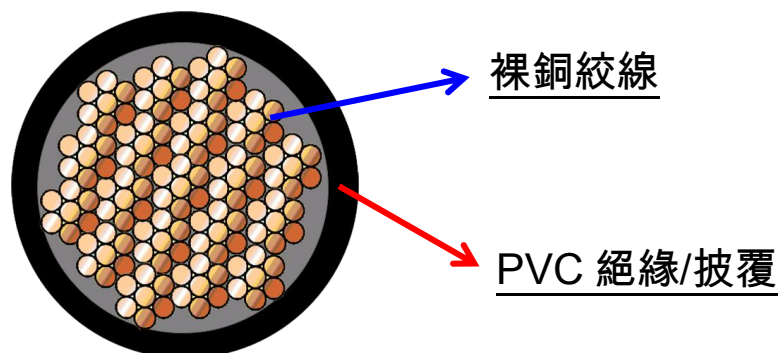

規格 mm ²	裸銅絞線 導體結構 NO./mm	絕緣體 厚度 mm	完成 外徑 mm	耐電壓 (A.C) KV/min	最大 導體電阻 (20°C) Ω/KM	最小 絕緣電阻 (20°C) MΩ-KM	安全 電流表 A
0.5	20/0.18	0.8	2.20	1.5/1	24.4	60	7
0.75	30/0.18	0.8	2.50	1.5/1	14.7	60	11
1.25	50/0.18	0.8	3.10	1.5/1	9.5	60	15
2.0	37/0.26	0.8	3.60	1.5/1	5.49	60	20
3.5	65/0.26	1.0	4.10	1.5/1	3.35	60	28
5.5	105/0.26	1.2	5.10	1.5/1	2.39	50	38
8	7/22/0.26	1.4	6.10	2.0/1	1.350	50	55
14	7/39/0.26	1.6	7.60	2.0/1	0.855	40	75
22	7/60/0.26	1.6	9.90	2.0/1	0.635	40	100
38	7/107/0.26	1.8	12.50	2.0/1	0.498	40	145
50	19/52/0.26	1.85	14.60	2.5/1	0.370	30	205
60	19/62/0.26	1.85	15.60	2.5/1	0.308	30	237
80	19/83/0.26	2.1	17.20	2.5/1	0.238	30	280
100	19/104/0.26	2.1	18.70	2.5/1	0.190	30	332
125	37/64/0.26	2.25	21.3	3.0/1	0.148	20	385
150	37/77/0.26	2.3	23.0	3.0/1	0.123	20	412
200	61/62/0.26	2.6	26.5	3.0/1	0.0929	20	503
250	61/77/0.26	2.6	28.9	3.0/1	0.0748	20	565
325	61/101/0.26	3.2	33.6	3.0/1	0.0570	20	630