


POSSING ELECTRONIC CO.,LTD.

Automotive Fuse --Fast-Acting Type

ATP-Blade Terminal Fuse RoHS

Designed for the automotive industry. The ATP Blade Type Fuse doesn't only intend to protect the automotive wire and automotive apparatus but also the UPS equipment.

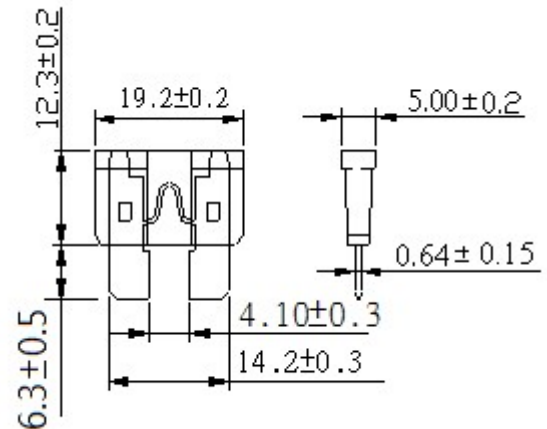

ELECTRICAL CHARACTERISTICS:

TIME CURRENT CHARACTERISTICS			
% of Rating	Current Rating	Opening Time	
		Minimum	Maximum
100%	35– 40 Amp	100 Hours	
110%	1– 30 Amp	100 Hours	
135%	1 - 2 Amp	0.35 Sec	1800 Sec
135%	3 - 40 Amp	0.75 Sec	1800 Sec
200%	1 – 2 Amp	0.10 Sec	5 Sec
200%	3 – 40 Amp	0.15 Sec	5 Sec
350%	1 – 2 Amp	0.02 Sec	0.5 Sec
350%	3 – 40 Amp	0.08 Sec	0.5 Sec

Color – Coding: Blade Fuses are color-coded for easy amperage identification.

Material: Fuse Body is made from plastic polycarbonate.
Fuse Element: Zinc Alloy.

Complies with: UL 248 special purpose fuse
ISO 8820-3

Operating Temperature Range: -20°C to +105°C

Ordering Information:

Catalogue Number	Ampere Rating	Voltage Rating	Color Code	Nominal Resistance Cold Ohms	Nominal Melting I2t A2 Sec
ATP(C)-1	1	32	Lt Black	0.100	0.5 A2s
ATP-2	2	32	Grey	0.055	1.5 A2s
ATP-3	3	32	Maure	0.033	7.2 A2s
ATP-4	4	32	Pink	0.023	15.5 A2s
ATP-5	5	32	Tan	0.017	24 A2s
ATP-7.5	7.5	32	Brown	0.011	57 A2s
ATP-10	10	32	Red	0.0077	121 A2s
ATP-15	15	32	Blue	0.0048	360 A2s
ATP-20	20	32	Yellow	0.0033	542 A2s
ATP-25	25	32	Natural	0.0025	1060 A2s
ATP-30	30	32	Green	0.0019	1470 A2s
ATP-35	35	32	Rose Pink	0.0016	2190 A2s
ATP-40	40	32	Amber	0.0014	3380 A2s

Time-Current Characteristic Curves–Average Melt

