




LONG PHOENIX PLASTIC INDUSTRIAL CO., LTD.

龍豐塑膠實業股份有限公司

TEL:(02)2680-5339 FAX:(02)2680-8777

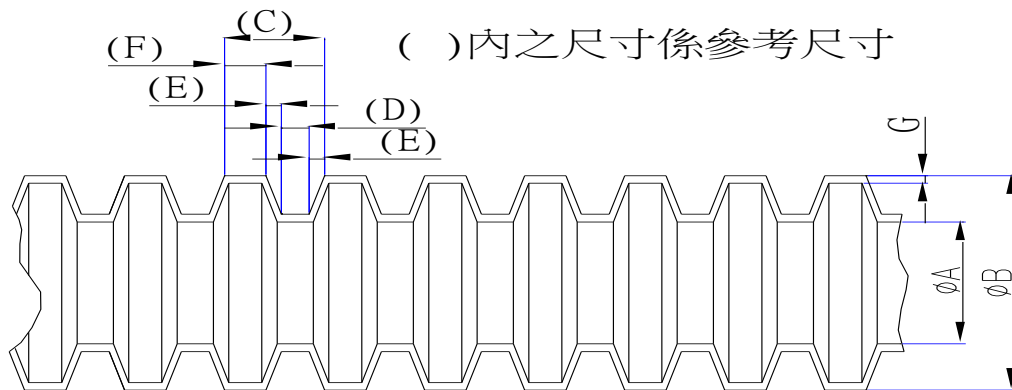

CP系列：For power cabling 電工器材適用(歐系)

Unit : mm

Type產品型號	CP-07	CP-09	CP-11	CP-16	CP-21	CP-29	CP-36	CDP-42	CP-48	CP-70	CP-80
Nominal Dimension 規格	1/4"	5/16"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
A(I.D.)內徑	7.3±0.4	10.0±0.4	12.0±0.4	16.7±0.4	21.9±0.4	27.6±0.6	36.0±0.6	40.6±0.8	47.0±0.8	68.5±1	80.0±1.5
B(O.D.)外徑	10.0±0.4	13.05±0.4	15.8±0.4	21.2±0.4	28.5±0.4	34.5±0.5	42.5±0.5	48.8±0.8	54.5±0.8	80.5±1	89.0±1.5
(C)	2.72	2.93	3.18	3.46	4.76	4.76	6.35	6.35	6.35	7.6	10.88
(D)	0.60	0.60	0.70	0.61	0.75	0.85	1.15	1.35	1.10	2.2	2.88
(E)	0.30	0.30	0.30	0.40	0.50	0.60	0.75	0.40	0.75	0.4	0.50
(F)	1.52	1.73	1.88	2.05	3.01	2.71	3.70	4.20	3.75	4.6	7.00
Length 包裝 Per Pack(卷)	100M	50M/100M			50M		25M			25M	10M
Material 材質	PA6 UL-94 FR-V2 Thermal distortion temperature熱變形溫度： + 150℃ (24小時無變形) Cold resistances抗寒溫度： - 30℃ 材質通過RoHs規範 Fluid resistance抗化學性〔 燃料油(汽油、柴油)、潤滑油、清洗劑、電池酸液〕										
Color顏色	Black黑										
Remark備註	() Reference參考值 2025/7/1										