



Product Name: Electric Door Bolt

Product Type: JEB-250K

Features:

Providing concealed high security locking on any single or double action, hinged or sliding door in timber or metal for vertical or horizontal mounting.

Concealed mortise mounting.

Slimline styling suits most narrow profile joinery

Continuously rated solenoid

Power reduction module-minimises power consumption maximizes durability

Selectable unlock period- 0.3.6.9 seconds (DIP switch)

Door & Bolt position sensor

Complete with built in transient and reverse polarity protection and continuously rated solenoid.

Automatic deadlocking


With push button point to unlock bolt (control PIN & V+ must short.)

Specifications:


Power source	DC 12V 1A
Start current	0.85A
Operating current	90mA, hold after 500ms.
Face Plate	21031(L)×25(W)×43(H)mm

Strike: Mortise	80(L)×25(W)×10(H)mm
	Back Box: 160(L)×22(W)×40(H)mm
Bolt	14mm(diameter), 16mm(Throw)


JEB-250KH

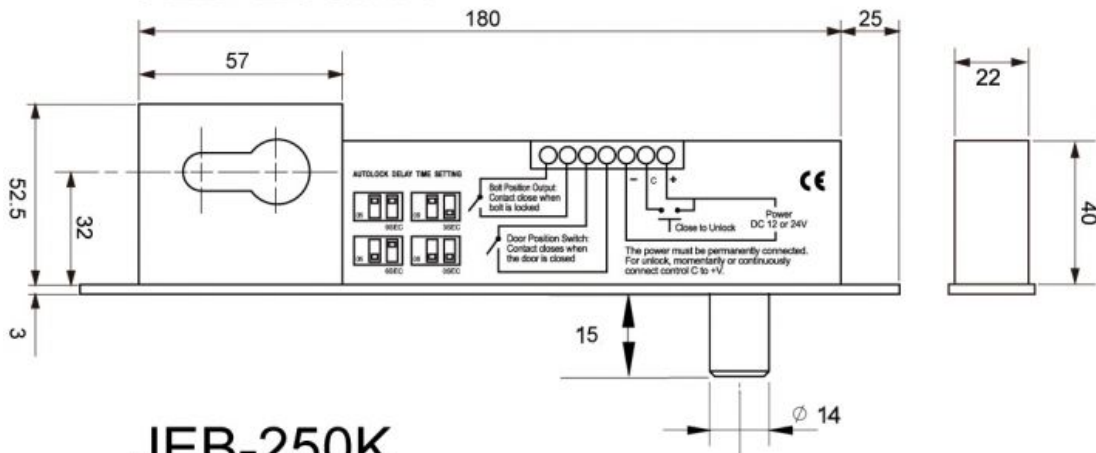


JEB-250K

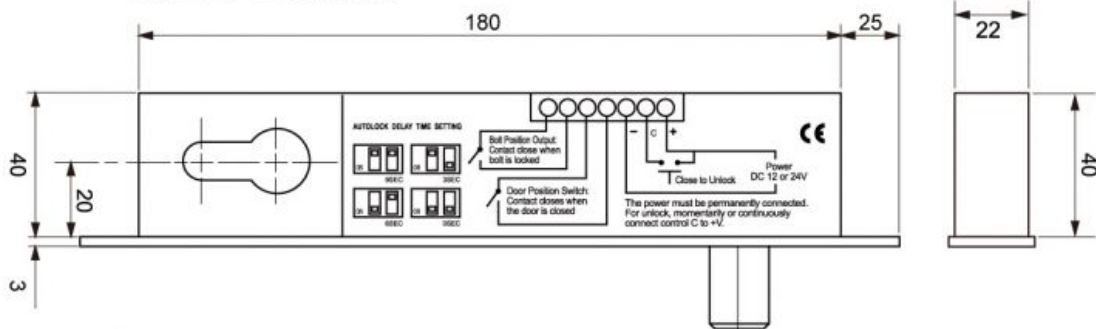


JEB-250KA(Square plate)

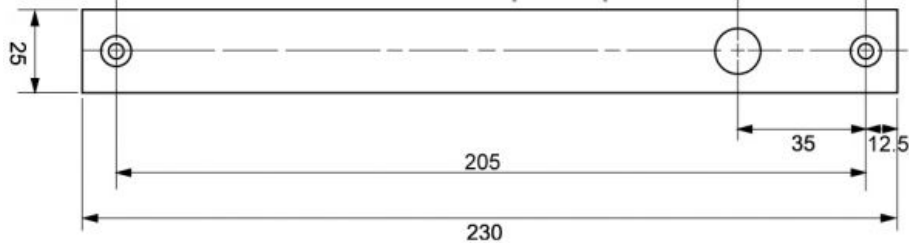

JEB-250K (Oval plate)

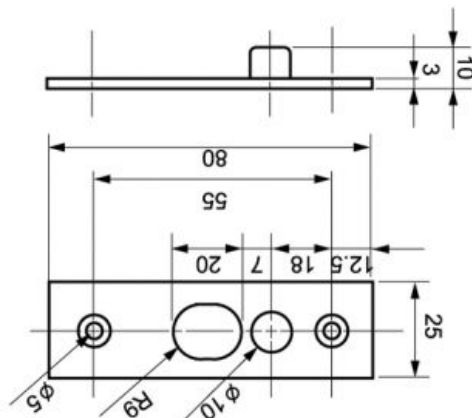

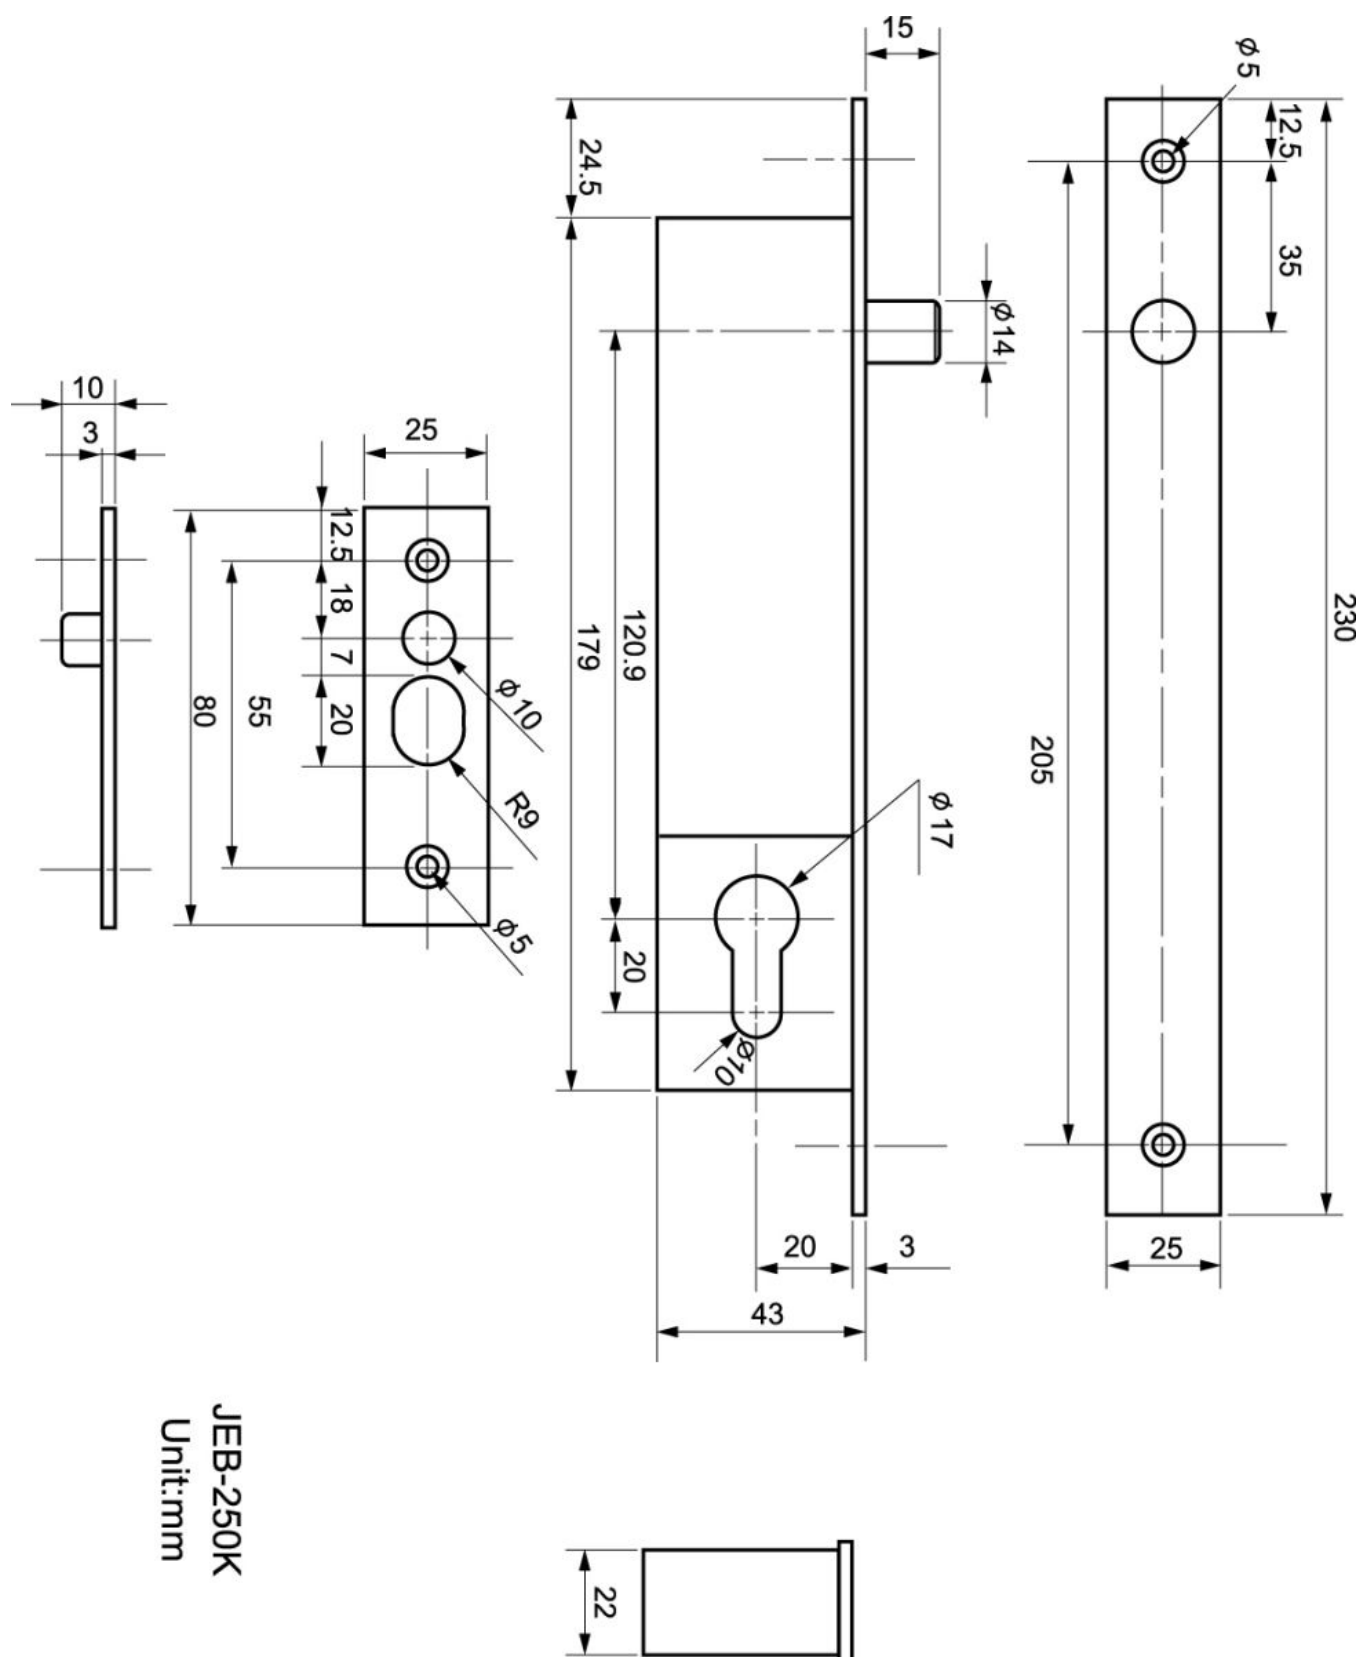

Ordering Information:

● Recommend (Standard) :

Oval plate + Fail Open

----- JEB-250 O

----- JEB-250 KO

Oval plate + Fail Secure

----- JEB-250 S

----- JEB-250 KS

Square plate + Fail Open

----- JEB-250 AO

----- JEB-250 KAO

Square plate + Fail Secure

----- JEB-250 AS

----- JEB-250 KAS

● option :

Oval plate + Fail Open

----- JEB-250 HO

----- JEB-250 KHO

Oval plate + Fail Secure

----- JEB-250 HS

----- JEB-250 KHS

Square plate + Fail Open

----- JEB-250 HAO

----- JEB-250 KHAO

Square plate + Fail Secure

----- JEB-250 HAS

----- JEB-250 KHAS

Reference models:

Taiwan Jantek Electronics., Ltd.

www.jantek.com.tw

Add:6F-1, No. 1, Wuquan 1St.Rd.,Xinzhuang District, TEL : 886-2-22991255

New Taipei City 24892,Taiwan, R.O.C.

FAX : 02-2299-1257 / 02-2299-7412

Email : service@jantek.com.tw