



Product Name: Standalone Proximity
Access Control Unit

Product Type: PR-35C

Features:

Low price, single door Proximity System

Frequency is 125KHZ

Reading range from 5~8cm (under normal environment)

Could be used by 0.18cm 0.76cm EM card or key tag

Access control unit includes built-in reader and programming keypad

Card capacity is 9,999 cards (Key tags)

Built-in Watch Dog, the system never hang

Built-in tamper switch detects when case is forced open or destroy.

The alarm signal output (A. B. point)

Data is protected even after power failure

Programmable alarm loop enable/disable through keypad

Programmable door release time from 1~250 seconds through keypad

Access Code could be added or deleted through keypad


There are three operating Mode-Card only, Card with Keypad or PIN only

With door bell button

Specifications:

Keypad	3 x 4, 12 keys, Plus a door bell key
Power requirement	DC 12V 1Amp
Operating temperature	32 ° F~122 ° F(0 ° C~50 ° C)
Humidity	20%~90%RH
Dimensions	123 (L) X 93 (W) X 35 (H) mm
Relay	2 relay contact (Max. DC 12V 1Amp)

Ordering Information:

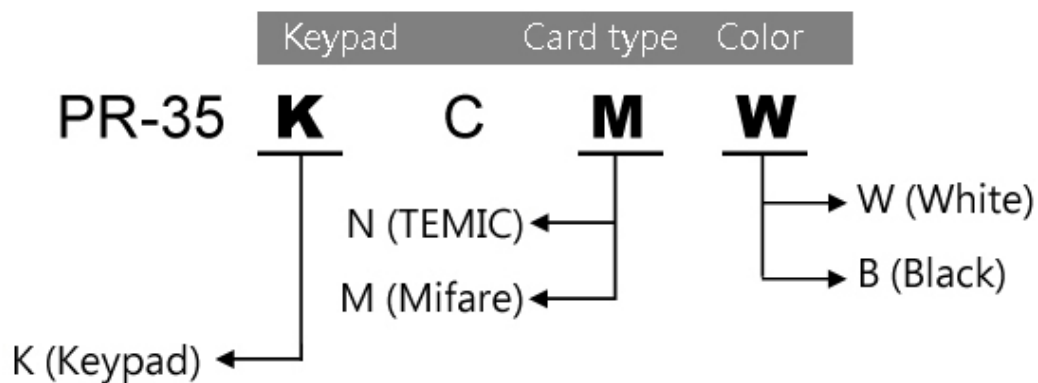

Reference models:

Taiwan Jantek Electronics., Ltd.

www.jantek.com.tw

Add:6F-1, No. 1, Wuquan 1St.Rd.,Xinzhuang District, TEL : 886-2-22991255

New Taipei City 24892,Taiwan, R.O.C.

FAX : 02-2299-1257 / 02-2299-7412

Email : service@jantek.com.tw